



# PRODUCT CATALOG

2015



# PERFORMANCE YOU CAN TRUST

Introducing the NEW Pirelli Confidence *Plus* Plan.

## The Pirelli Confidence *Plus* Plan includes:

- Limited Treadwear Mileage Warranty\*
- 30 Day Trial\*\*

## Limited Treadwear Mileage Warranty:

- Pirelli warrants that the tires listed to the right will last for the described odometer miles from the point of original retail purchase. The authorized Pirelli dealer will determine the replacement tire cost by multiplying the percentage of the mileage obtained by the current dealer selling price. Additional exclusions may apply, please see the "What Is Not Covered by the Warranty?" section of the Pirelli Warranty at US.Pirelli.com.

## 30 Day Trial:\*\*

- If you are not satisfied with your new set of four (4) Pirelli *Plus* tires, you can exchange them for a new set of four (4) Pirelli tires at the original place of purchase, within 30 days from the original date of purchase.

## Applies to the tires lines listed below:

**P ZERO™**  
ALL SEASON *Plus*

UHP All Season  
50,000 Mile Limited Treadwear Warranty\*

**Cinturato P7™**  
ALL SEASON *Plus*

Grand Touring All Season  
70,000 Mile Limited Treadwear Warranty\*

**P4™**  
FOUR SEASONS *Plus*

Standard Touring  
90,000 Mile Limited Treadwear Warranty\*‡

**SCORPION VERDE™**  
ALL SEASON *Plus*

CUV / SUV / LT All Season  
65,000 Mile Limited Treadwear Warranty\*

\* For complete warranty details, visit an authorized Pirelli Dealer or US.Pirelli.com  
\*\*Valid ONLY to exchange the original qualifying set of tires for a new set of Pirelli tires, within 30 days of purchase, at the place of purchase with an original receipt.  
CONFIDENCE PLUS PLAN word and logo are trademarks of Pirelli Tire LLC.  
‡Valid only for T-rated P4 Four Seasons Plus tires.



# SPORT/UHP



P ZERO  
CORSA  
SYSTEM



P ZERO



P ZERO  
NERO GT



P ZERO  
ROSSO



P ZERO  
SYSTEM



P ZERO  
ALL SEASON  
*Plus*


NEW!



P ZERO NERO  
ALL SEASON



SOTTOZERO 3



SOTTOZERO  
SERIE II



SOTTOZERO



## LUXURY TOURING



CINTURATO  
P7



CINTURATO  
P7  
ALL SEASON



CINTURATO  
P7  
ALL SEASON  
*Plus*



P6 FOUR  
SEASONS



P6 FOUR  
SEASONS  
PLUS



P4 FOUR  
SEASONS  
*Plus*

**NEW!**



SNOWCONTROL  
SERIE III

## SUV/CROSSOVER/LT



P ZERO



SCORPION  
VERDE



P ZERO  
ROSSO



SCORPION  
VERDE  
ALL SEASON



SCORPION  
VERDE  
ALL SEASON  
*Plus*



SCORPION  
STR



SCORPION  
ATR



SCORPION  
ZERO  
ASIMMETRICO



SCORPION  
ZERO



SCORPION  
WINTER



SCORPION  
ICE & SNOW

# OEM MARKINGS


**O** riginal Equipment (OE) tires can be recognized by a specific marking on the sidewall which indicates that the tire was co-developed with a specific auto manufacturer. These tires have been homologated by the vehicle manufacturer and are the perfect match for the model they have been developed for.

OE tires are the result of a strong joint effort of technological development with premium auto manufacturers and, therefore, are the optimum tires to enhance the performance of the best cars. They represent the peak of a state-of-the-art fine tuning process that complements the most recent technological developments in the automotive industry.

These are the only tires purposely designed to enhance a specific vehicle's performance while ensuring a unique driving experience.

For years, Pirelli has been the leading provider of premium original equipment tires boasting hundreds of approved homologations. With our expertise, we continuously look to the future to forge new homologations for the best vehicles.




MARKING	OEM/VEHICLE	DETAILS	MARKING	OEM/VEHICLE	DETAILS
AM8, AM9, AMP, AMR, AMS, AMV, AMX, AM...		All new Aston Martin tires have these markings. Tires are developed specifically for the vehicle's characteristics.	AO		Used for new Audis.
R01, R02	 Specific AUDI QUATTRO models (R8, RS4, RS5, RS6)	All new Audi Quattro models have specifically marked tires.	B, B1, BC, BL		New vehicles are fitted with this specific marking.


**MARKING**

**OEM/VEHICLE**

**DETAILS**



All new vehicles from this vehicle manufacturer are fitted with tires with this specific marking.





All Pirelli tires fitted to new vehicles from this manufacturer have this marking and are developed for the particular characteristics of these vehicles.



McLarens are fitted with tires with this specific marking, designed for the particular characteristics of these vehicles.



MO1 is used for specific Mercedes AMG fitments.



All Porsche vehicles are fitted with tires with this marking.



Pirelli internal marking for




This marking is used for some specific Ferrari versions.


**MARKING**

**OEM/VEHICLE**

**DETAILS**




This marking is used for selected Jaguar fitments. JRS is specific to some XK-RS fitments.





LS is used for the new Lotus Exige S. Tires are designed for the particular characteristics of this vehicle.



MO=Mercedes Original. New vehicles from this manufacturer are fitted with tires with this specific marking.



MOE=Mercedes Original Extended. Specific marking for the run-flat fitment of Mercedes. All new vehicles from Mercedes fitted with r-f tires use this specific marking.



VO= Volkswagen Original. Used for some Touareg fitments which are not shared with Porsche Cayenne.



This marking has been introduced by Maserati for all the models in production from 2013.

# P ZERO™

## ALL SEASON *Plus*

NEW PRODUCT  
INTRODUCTION

### EXCEPTIONAL GRIP AND HANDLING MILE AFTER MILE

Now drivers of performance vehicles can take on hairpin turns, slippery roads and sudden stops all with confident control and smooth comfort, plus year-round versatility that's built to last.

The P Zero All Season Plus is a replacement tire that provides maximum performance in all weather conditions. It delivers enhanced handling and grip with a 50,000 mile limited treadwear warranty.\*



50,000 mile limited treadwear warranty\*



Excellent wet braking performance and handling



UHP all season replacement tire that provides maximum performance in all weather conditions



Quiet and comfortable ride



### PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the Pirelli Confidence *Plus* Plan



# P4™ FOUR SEASONS *Plus*

**NEW PRODUCT  
INTRODUCTION**

## THE LONG LASTING, FUEL EFFICIENT TIRE WITH A COMFORTABLE RIDE

Engineered to last longer, the P4 Four Seasons Plus is backed by a 90,000 mile limited treadwear warranty\*‡. Its reinforced shoulders enhance stability for high mileage, even treadwear and fuel savings giving you a tire that saves you money on gas and outlasts the competition.



Long wear, 90,000 mile limited treadwear warranty\*‡



Quiet ride, fuel savings and reduced CO2 emissions



Outstanding performance in all weather conditions



Safety and control in potential aquaplaning situations



## PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the Pirelli Confidence *Plus* Plan



























\* For complete warranty details, visit an authorized Pirelli Dealer or [US.Pirelli.com](http://US.Pirelli.com)  
CONFIDENCE PLUS PLAN word and logo are trademarks of Pirelli Tire LLC.  
‡Valid only for T-rated P4 Four Seasons Plus tires.



# P ZERO™

The P Zero Family is the maximum expression of Pirelli's "Ultra High Performance" philosophy, with a rich heritage rooted in premium innovation that meets the sporting needs of the modern driver. Excellent in wet conditions, the P Zero family reduces the risk of hydroplaning, and offers increased safety and handling. Presenting a great fit for both high-performance city cars as well as prestigious and powerful GTs.

# P ZERO

TIRE	BRAKING	HANDLING	COMFORT	WEAR LIFE	DESCRIPTION
 <p><b>P ZERO</b> CORSA SYSTEM</p>					<p>P Zero Corsa is the highest evolution of the range. It has a directional tread pattern for the front axle and an asymmetrical pattern for the rear axle. It is designed for use on road and for occasional track sessions.</p> <p>Developed with an innovative racing tread compound it is ideal for the fastest and most powerful cars in the Ultra High Performance sector.</p>
 <p><b>P ZERO</b></p>					<p>A reference point for the Ultra High Performance segment, it is characterized by an asymmetric tread pattern. It is ideal for all top of the range sports and high-powered cars and can also be considered for powerful mid-range vehicles. P Zero has been chosen as original equipment for the most performance orientated and powerful models on the market.</p>
 <p><b>NEW!</b></p> <p><b>P ZERO</b> ALL SEASON PLUS</p>					<p>Developed with the most advanced materials and high tech production methods, the P Zero All Season Plus is a replacement tire that provides maximum performance in all weather conditions. It delivers enhanced handling and grip with a 50,000 mile limited treadwear warranty.*</p> 
 <p><b>P ZERO</b> NERO ALL SEASON</p>					<p>A winning combination of quiet ride, precise cornering and superior grip in wet and dry driving conditions. Asymmetric Ultra High Performance all season tread dedicated to the North American market offers precision handling even at the limit.</p>
 <p><b>PZERO</b> NERO<sup>GT</sup></p>					<p>P ZERO NERO<sup>TM</sup> GT is the evolution of the P ZERO NERO<sup>TM</sup>: enhanced product performance and wider fitments range, targeting those consumers who want to fit Pirelli on their medium-large sedans and sporty cars.</p>

**LEGEND PERFORMANCE:**



# P ZERO™ CORSA SYSTEM™

## ULTRA HIGH PERFORMANCE SPORT

### 1 EXTREME GRIP

Innovative “racing” tread compound performs at high operating temperatures maximizing traction and braking.

### 2 CORNERING STABILITY

Specialized tire structure maintains rigidity at high speeds.

### 3 OPTIMUM HANDLING IN ALL SITUATIONS

Asymmetric tread pattern design provides a wide and stable contact area.

### 4 WET TRACTION

Directional design with longitudinal grooves improves water expulsion in wet conditions.



### ORIGINAL EQUIPMENT

Aston Martin  
Audi  
Ferrari  
Lamborghini  
Lotus  
Porsche  
Maserati  
McLaren  
SRT





# P ZERO CORSA SYSTEM

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO CORSA SYSTEM ASIMMETRICO</b>													
<b>18" Rim</b>													
2114900	^ 265/35ZR18	XL (LS)	97Y	Lotus Exige Brooklands (R)	9.5	9.0 - 10.5	1609	50	10.9	25.5	8/32	25	60 AA A
2307400	^ P295/30ZR18		(94Y)	Dodge Viper	10.5	10.0 - 11.0	1477	51	11.9	25.0	8/32	25	60 AA A
1611800	335/30ZR18	RIGHT	(102Y)	Lamborghini Murciélago (RR)	12	11.5 - 12.5	1874	51	13.2	25.9	7/32	32	60 AA A
1611900	335/30ZR18	LEFT	(102Y)	Lamborghini Murciélago (LR)	12	11.5 - 12.5	1874	51	13.2	25.9	7/32	32	60 AA A
<b>19" Rim</b>													
2469700	^ 235/35ZR19	XL (MC1)	(91Y)	McLaren MP4-12C / Spider	8.5	8 - 9.5	1356	50	9.5	25.5	8/32	18	60 AA A
2376300	^ 245/35ZR19	XL (MC)	(93Y)	McLaren MP4-12C / Spider	8.5	8.0 - 9.5	1433	50	9.8	25.8	8/32	20	60 AA A
1975400	285/35ZR19	(K1) LEFT	(99Y)	Ferrari 360 Challenge Stradale / F430 Scuderia (LR)	10	9.5 - 11.0	1709	51	11.7	26.8	9/32	27	60 AA A
1975500	285/35ZR19	(K1) RIGHT	(99Y)	Ferrari 360 Challenge Stradale / F430 Scuderia (RR)	10	9.5 - 11.0	1709	51	11.7	26.8	9/32	27	60 AA A
2398400	^ 265/30ZR19	XL (F)	(93Y)	Ferrari LaFerrari	9.5	9 - 10	1433	50	10.7	25.3	8/32	20	60 AA A
2037200	285/30ZR19	XL (*) LEFT	(98Y)	BMW 3 Series M3 GTS / Mercedes CLK63 AMG Black Series (LR)	10	9.5 - 10.5	1653	50	11.5	25.8	9/32	28	60 AA A
2037300	285/30ZR19	XL (*) RIGHT	(98Y)	BMW 3 Series M3 GTS / Mercedes CLK63 AMG Black Series (RR)	10	9.5 - 10.5	1653	50	11.5	25.8	9/32	28	60 AA A
1853200	295/30ZR19	XL (AM8) RIGHT	(100Y)	Aston Martin V12 Vantage / Zagato (RR)	10.5	10.0 - 11.0	1764	50	11.6	26.0	8/32	29	60 AA A
1853300	295/30ZR19	XL (AM8) LEFT	(100Y)	Aston Martin V12 Vantage / Zagato (LR)	10.5	10.0 - 11.0	1764	50	11.6	26.0	8/32	29	60 AA A
1967300	^ 295/30ZR19	XL (L)	(100Y)	Lamborghini Gallardo LP550-2 Balboni / LP560-4 / LP570-4 Spyder Preformante / LP570-4 Superleggera / LP570-4 Supertroufeo Stradale / Superleggera	10.5	10.0 - 11.0	1764	50	11.6	26.0	8/32	29	60 AA A
1939100	^ 305/30ZR19	XL (N1)	(102Y)	Porsche 911 Carrera GT2 / GT3 / RS (997) (R)	11	10.5 - 11.5	1874	50	12.3	26.3	8/32	31	60 AA A
2097000	^ 305/30ZR19	XL (R02)	(102Y)	Audi R8 / GT (R)	11	10.5 - 11.5	1874	50	12.3	26.3	8/32	31	60 AA A
2307500	^ P355/30ZR19	LL	(99Y)	Dodge Viper	12.5	12.0 - 13.0	1709	51	14.2	27.4	8/32	35	60 AA A
<b>20" Rim</b>													
2029800	^ 295/35ZR20	XL	(105Y)	Maserati GranTurismo MC Stradale (R)	10.5	10.0 - 11.5	2039	50	12.1	28.0	6/32	32	60 AA A
2377700	^ 255/30ZR20	XL (L)	(92Y)	Lamborghini Aventador	9	8.5 - 9.5	1389	50	10.2	26.1	8/32	18	60 AA A
2064700	^ 275/30ZR20	XL (LS)	(97Y)	Lotus Evora / S (R)	9.5	9.0 - 10.0	1609	50	10.8	26.5	8/32	26	60 AA A
2148000	^ 305/30ZR20	(MC1)	(99Y)	McLaren MP4-12C / Spider (R) / Jaguar XJR-S (R)	11	10.5 - 11.5	1709	51	12.3	27.2	6/32	30	60 AA A
2129500	^ 315/30ZR20	(MC)	(101Y)	McLaren P1	11	10.5 - 11.5	1819	51	12.6	27.5	6/32	33	60 AA A
1949300	^ 335/30ZR20	(AMP)	(104Y)	Aston Martin One 77 (R)	12	11.5 - 12.5	1984	51	13.8	27.9	6/32	37	60 AA A
2255900	^ 345/30ZR20	(F)	(106Y)	Ferrari LaFerrari	12	11.5 - 12.5	2094	51	13.8	28.2	6/32	31	60 AA A
<b>21" Rim</b>													
2377600	^ 355/25ZR21	XL (L)	(107Y)	Lamborghini Aventador	13	12.5 - 13.5	2149	50	14.4	28.0	8/32	33	60 AA A
<b>P ZERO CORSA SYSTEM DIREZIONALE</b>													
<b>17" Rim</b>													
2115000	205/45ZR17	XL (LS)	88Y	Lotus Exige Brooklands (F)	7	6.5 - 7.5	1235	50	8.3	24.4	8/32	21	60 AA A
<b>18" Rim</b>													
1635300	245/35ZR18	XL	(92Y)	Lamborghini Murciélago LP640 / LP650-4 Roadster / LP670-4 SV (F)	8.5	8.0 - 9.5	1389	50	9.6	24.5	8/32	19	60 AA A
<b>19" Rim</b>													
2563100	255/40ZR19	(*)	(96Y)	Ford Mustang Boss 302 Laguna Seca (F)	9	8.5 - 10	1565	51	10.2	27.0	9/32	25	60 AA A
1496100	225/35ZR19		(84Y)	Ferrari 360 Challenge Stradale (F)	8	7.5 - 9.0	1102	51	9.1	25.2	9/32	20	60 AA A
1911300	235/35ZR19	XL (N1)	(91Y)	Porsche 911 Carrera GT2 / GT3 / RS (997) (F)	8.5	8.0 - 9.5	1356	50	9.3	25.6	8/32	20	60 AA A
1967200	235/35ZR19	XL (L)	(91Y)	Lamborghini Gallardo LP550-2 Balboni / LP560-4 / LP570-4 Spyder Preformante / LP570-4 Superleggera / LP570-4 Supertroufeo Stradale / Superleggera	8.5	8.0 - 9.5	1356	50	9.3	25.6	8/32	21	60 AA A
1975300	235/35ZR19	XL	(91Y)	Ferrari F430 Scuderia / Lotus Evora / S (F)	8.5	8.0 - 9.5	1356	50	9.3	25.6	8/32	20	60 AA A
2096900	235/35ZR19	XL (R02)	(91Y)	Audi R8 / GT (F)	8.5	8.0 - 9.5	1356	50	9.3	25.6	8/32	20	60 AA A
1789300	255/35ZR19	XL (AM8)	(96Y)	Aston Martin V12 Vantage / Zagato / Ferrari 575 Handling GTC (F)	9	8.5 - 10.0	1565	50	10.2	26.0	9/32	26	60 AA A
<b>20" Rim</b>													
1912500	255/35ZR20	XL (AMP)	(97Y)	Aston Martin One 77 / Maserati GranTurismo MC Stradale (F) / Jaguar XKR-S (F)	9	8.5 - 10.0	1609	50	10.2	27.0	9/32	22	60 AA A

# P ZERO™

## ULTRA HIGH PERFORMANCE

### 1 REDUCED NOISE EMISSION

Advanced technological asymmetric contour optimizes footprint for even tread wear quiet ride and improved mileage.

### 2 IMPROVED WET GRIP

Three longitudinal grooves provide fast water expulsion for improved safety and control in potential aquaplaning situations.

### 3 ENHANCED OVERALL SPORT DRIVING PERFORMANCE

Outer shoulder with rigid blocks increases lateral rigidity and steering response.

### 4 IMPROVED BRAKING AND TRACTION AT HIGH SPEED

Three solid longitudinal ribs with increased pattern stiffness provide an optimized contact area.

- Available in Run Flat Technology (See Road Hazard Warranty).



## ORIGINAL EQUIPMENT

Alfa Romeo	Lamborghini
Aston Martin	Lotus
Audi	Maserati
Bentley	McLaren
BMW	Mercedes
Buick	MINI
Chevrolet	Porsche
Ferrari	SRT
Ford	Volkswagen
Jaguar	





# P ZERO

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO</b>													
<b>17" Rim</b>													
1874100	235/60R17	(AO)	102Y	Audi A8	7	6.5 - 8.5	1874	51	9.4	28.1	11/32	28	220 AA A
1842600	205/50R17	(*) Runflat	89V	BMW 1 Series (F/All)	6.5	5.5 - 7.5	1279	51	8.7	24.9	11/32	24	220 AA A
2129300	205/45R17	Runflat	84V		7	6.5 - 7.5	1102	51	8.0	24.3	10/32	22	220 AA A
1817100	205/45R17	(*) Runflat	84V (e)	Mini Cooper	7	6.5 - 7.5	1102	51	8.0	24.3	10/32	20	220 AA A
2207200	205/45ZR17	XL (AR)	88Y	Alfa Romeo 4 C	7	6.5 - 7.5	1235	50	8.1	24.3	10/32	19	220 AA A
2427300	205/45R17	XL (*)	88Y	Mini Cooper	7	6.5 - 7.5	1235	50	8.1	24.3	10/32	19	220 AA A
1738300	225/45R17	(*) Runflat	91W	BMW 3 Series (F/All)	7.5	7.0 - 8.5	1356	51	8.9	25.0	10/32	24	220 AA A
1744100	225/45ZR17	XL	94Y		7.5	7.0 - 8.5	1477	50	8.9	25.0	10/32	21	220 AA A
1738600	255/40R17	(*) Runflat	94W (e)	BMW 3 Series (R)	9	8.5 - 10.0	1477	51	10.2	25.0	10/32	28	220 AA A
<b>18" Rim</b>													
2166500	235/50ZR18	XL (MGT)	(101Y)	Maserati Ghibli	7.5	6.5 - 8.5	1819	50	9.6	27.2	10/32	26	220 AA A
1766400	245/50ZR18	(NO)	(100Y)	Porsche Panamera / GTS / S / 4 / 4S / Turbo (F)	7.5	7.0 - 8.5	1764	51	10.1	27.6	10/32	27	220 AA A
2315700	245/50ZR18	(N1)	(100Y)	Porsche Panamera (G1 - 2nd generat)	7.5	7.0 - 8.5	1764	51	10.1	27.6	10/32	26	220 AA A
1789000	245/50R18	(*) Runflat	100Y (e)	BMW 5 Series GT / 7 Series / X3	7.5	7.0 - 8.5	1764	51	10.1	27.6	10/32	35	220 AA A
2193000	225/45R18	(*)	91W	Mini Cooper Paceman / Countryman	7.5	7.0 - 8.5	1356	51	9.1	26.1	9/32	22	220 AA A
2202300	225/45R18	XL	95W		9	8.5 - 10	1521	50	10.5	29.4	9/32	24	220 AA A
1775900	245/45ZR18	XL	(100Y)	Jaguar XF	8	7.5 - 9.0	1764	50	9.6	26.7	10/32	25	220 AA A
2016900	245/45R18	(AO)	96Y	Audi A4 Allroad	8	7.5 - 9	1565	51	9.6	26.7	10/32	26	220 AA A
1996900	255/45R18	(AO)	99Y	Audi A7	8.5	8.0 - 9.5	1709	51	10.0	27.0	10/32	25	220 AA A
1766600	275/45ZR18	(NO)	(103Y)	Porsche Panamera / GTS / S / 4 / 4S / Turbo (R)	9	8.5 - 10.5	1929	51	11.1	28.0	10/32	29	220 AA A
2315600	275/45ZR18	(N1)	(103Y)	Porsche Panamera (G1 - 2nd generat)	9	8.5 - 10.5	1929	51	11.1	27.8	10/32	26	220 AA A
2166400	275/45ZR18	XL (MGT)	(107Y)	Maserati Ghibli	9	8.5 - 10.5	2149	50	11.1	27.8	10/32	31	220 AA A
2207300	205/40ZR18	XL (AR)	86Y	Alfa Romeo 4C	7.5	7.0 - 8.0	1168	50	8.5	24.5	10/32	18	220 AA A
2424600	205/40ZR18	XL	86Y	Alfa Romeo 4C	7.5	7.0 - 8.0	1168	50	8.5	24.5	10/32	18	220 AA A
1837200	215/40R18	Runflat	85Y (e)		7.5	7.0 - 8.5	1135	51	8.5	24.8	10/32	24	220 AA A
2117600	225/40ZR18	XL	(92Y)		8	7.5 - 9.0	1389	50	9.1	25.1	10/32	21	220 AA A
1992700	225/40R18	(*) Runflat	88Y (e)	BMW 1 Series (F)	8	7.5 - 9.0	1235	51	9.3	25.2	10/32	22	220 AA A
2337000	225/40R18	XL (MOE) Runflat	92W	Mercedes CLA / B Class / A Class	8	7.5 - 9.0	1389	50	9.3	25.2	10/32	23	220 AA A
1679700	225/40ZR18	XL (MO)	92Y	Lotus Evora / S / Mercedes C Class / AMG / CLK / AMG / SLK / AMG (F) / Volkswagen Golf / Golf Pirelli	8	7.5 - 9.0	1389	50	9.1	25.1	10/32	22	220 AA A
1748100	*** 235/40ZR18	XL	(95Y)		8.5	8.0 - 9.5	1521	50	9.8	25.2	10/32	23	220 AA A
1723000	235/40ZR18	XL (MO)	95Y	Mercedes E Class / SLK AMG	8.5	8.0 - 9.5	1521	50	9.8	25.2	10/32	24	220 AA A
2404700	235/40ZR18	XL (AR)	95Y	Alfa Romeo 4C	8.5	8.0 - 9.5	1521	50	9.8	25.2	10/32	24	220 AA A
1713000	245/40ZR18	XL	(97Y)		8.5	8.0 - 9.5	1609	50	9.9	25.7	10/32	24	220 AA A
2146600	245/40R18	Runflat	93Y	Cadillac CTS	8.5	8.0 - 9.5	1433	51	9.8	25.7	10/32	29	220 AA A
1949400	245/40R18	XL (MO)	97Y	Mercedes E Class (F/All)	8.5	8.0 - 9.5	1609	50	9.9	25.7	10/32	23	220 AA A
2009200	255/40R18	(MO)	95Y	Mercedes SL (F)	9	8.5 - 10.0	1521	51	10.2	26.0	10/32	25	220 AA A
2051500	255/40R18	(MOE) Runflat	95Y (e)	Mercedes SL (F)	9	8.5 - 10.0	1521	51	10.2	26.0	10/32	29	220 AA A
2027700	255/40R18	XL (MO)	99Y	Mercedes CLS / AMG / SL (F)	9	8.5 - 10.0	1709	50	10.4	26.0	10/32	25	220 AA A
1992500	245/35R18	(*) Runflat	88Y (e)	BMW 1 Series (R)	8.5	8.0 - 9.5	1235	51	9.8	24.8	10/32	23	220 AA A
1654900	245/35ZR18	XL (MO)	92Y	Mercedes C Class / CLK / SLK / CLC / CLA (R)	8.5	8.0 - 9.5	1389	50	9.7	24.1	10/32	22	220 AA A
1740200	255/35R18	Runflat	90Y (e)		9	8.5 - 10.0	1323	51	10.0	25.2	10/32	24	220 AA A
1800400	255/35ZR18	XL (MO)	94Y	Mercedes C Class / E Class / CLK / SLK / AMG (R)	9	8.5 - 10.0	1477	50	10.1	25.2	10/32	25	220 AA A
1949500	265/35R18	XL (MO)	97Y	Mercedes E Class (R)	9.5	9.0 - 10.5	1609	50	10.9	25.4	10/32	24	220 AA A
2146700	275/35R18	Runflat	95Y	Cadillac CTS	9.5	9.0 - 11.0	1521	51	10.9	25.6	10/32	31	220 AA A
2009300	285/35R18	(MO)	97Y	Mercedes CLS / AMG / SL (R)	10	9.5 - 11.0	1609	51	11.6	26.0	10/32	26	220 AA A
2051400	285/35R18	(MOE) Runflat	97Y (e)	Mercedes SL (R)	10	9.5 - 11.0	1609	51	11.4	25.9	10/32	31	220 AA A
2307300	P295/30ZR18		(94Y)	Dodge Viper	10.5	10.0 - 11.0	1477	51	11.9	25.0	10/32	25	220 AA A
<b>19" Rim</b>													
1767100	235/50R19	(MO)	99W	Mercedes GLK (F)	7.5	6.5 - 8.5	1709	51	9.4	28.2	10/32	30	220 AA A
1804000	265/50R19	XL (NO)	110Y	Porsche Cayenne / S / Turbo	8.5	7.5 - 9.5	2337	50	11.0	29.7	10/32	36	300 AA A
2141000	225/45R19	(*) Runflat	92W (e)	BMW 3 Series GT (F)	7.5	7.0 - 8.5	1389	51	9.0	27.1	10/32	28	220 AA A
1875500	245/45ZR19	XL (J)	(102Y)	Jaguar XJ (F)	8	7.5 - 9.0	1874	50	9.8	27.6	10/32	28	220 AA A
2166100	245/45ZR19	(MGT)	(98Y)	Maserati Quattroporte / Ghibli	8	7.5 - 9.0	1653	51	9.6	27.7	10/32	26	220 AA A
2122800	245/45R19	XL (MOE) Runflat	102Y	Mercedes S Class	8	7.5 - 9.0	1874	50	9.6	27.7	10/32	31	220 AA A
2154000	245/45R19	XL (MO)	102Y	Mercedes S Class	8	7.5 - 9	1874	50	9.6	27.7	9/32	27	220 AA A
2137300	245/45R19	(*) Runflat	98Y	BMW 7 Series / 5 Series GT / X3	8	7.5 - 9.0	1653	51	9.6	27.7	10/32	30	220 AA A
1788900	245/45R19	(*) Runflat	98Y (e)	BMW 7 Series / 5 Series GT / X3	8	7.5 - 9.0	1653	51	9.8	27.6	10/32	31	220 AA A
1918900	255/45ZR19	(NO)	(100Y)	Porsche Panamera / GTS / S / 4 / 4S / Turbo (F)	8.5	8.0 - 9.5	1764	51	10.2	28.0	10/32	29	220 AA A
2315500	255/45ZR19	(N1)	(100Y)	Porsche Panamera	8.5	8 - 9.5	1764	51	10.0	28.1	10/32	25	220 AA A
2306800	255/45ZR19	XL (MO)	(104Y)	Mercedes S Class AMG	8.5	8.0 - 9.5	1984	50	10.0	28.1	10/32	27	220 AA A
1767200	255/45R19	(MO)	100W	Mercedes GLK (R)	8.5	8.0 - 9.5	1764	51	10.2	28.0	10/32	31	220 AA A
2125500	255/45R19	(AO)	100Y	Audi A6 Allroad	8.5	8.0 - 9.5	1764	51	10.0	28.1	10/32	29	220 AA A
2035100	255/45R19	XL (AO)	104Y	Audi A8	8.5	8.0 - 9.5	1984	50	10.2	28.0	10/32	29	220 AA A
2168200	275/45ZR19	XL (B)	(108Y)	Bentley Continental Flying Spur	9	8.5 - 10.5	2205	50	11.4	32.3	10/32	32	220 AA A
2331700	225/40R19	(*) Runflat	89W (e)	BMW X1 / Mini Cooper Paceman / Countryman	8	7.5 - 9.0	1279	51	9.2	25.9	10/32	25	220 AA A

# P ZERO

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO</b>													
<b>19" Rim (cont'd)</b>													
1990700	225/40R19	(*) Runflat	89Y (e)	BMW 3 Series / 4 Series (F)	8	7.5 - 9.0	1279	51	9.1	25.9	10/32	25	220 AA A
2412000	225/40R19	XL (MOE) Runflat	93Y (e)	Mercedes C Class	8	7.5 - 9.0	1433	50	9.1	26.1	10/32	36	220 AA A
1958000	235/40ZR19	(NO)	(92Y)	Porsche Boxster / S / Cayman / S (981) (F)	8.5	8.0 - 9.5	1389	51	9.7	26.6	10/32	23	220 AA A
1902000	245/40ZR19		(94Y)	Ferrari California / Maserati GranCabrio / GranTurismo / S (F)	8.5	8.0 - 9.5	1477	51	9.8	26.7	10/32	25	220 AA A
2218200	245/40ZR19	(J)	(94Y)	Jaguar F-Type	8.5	8.0 - 9.5	1477	51	9.8	26.7	10/32	27	220 AA A
1876600	245/40ZR19	XL (J)	(98Y)	Jaguar XF / XK (F)	8.5	8.0 - 9.5	1653	50	9.8	26.7	10/32	24	220 AA A
1941800	245/40R19	(*) Runflat	94Y (e)	BMW 5 Series / 6 Series Gran Coupe (F)	8.5	8.0 - 9.5	1477	51	9.8	26.7	10/32	28	220 AA A
2539900	255/40ZR19	XL (MO)	(100Y)	Ford Mustang / Mercedes S Class	9	8.5 - 10	1764	50	10.2	27.0	10/32	25	220 AA A
1996400	255/40R19	XL (AO)	100Y	Audi A6 / A7 / Q3 Q3RS	9	8.5 - 10.0	1764	50	10.3	27.2	10/32	28	220 AA A
1949100	255/40ZR19		96W	Volkswagen Tiguan	9	8.5 - 10.0	1565	50	10.2	27.2	10/32	27	220 AA A
2141100	255/40R19	(*) Runflat	96W (e)	BMW 3 Series GT (R)	9	8.5 - 10.0	1565	51	10.3	27.2	10/32	31	220 AA A
2295000	255/40ZR19		96Y	Ford Mustang	9	8.5 - 10	1565	51	10.2	27.0	10/32	28	220 AA A
2039000	265/40ZR19	XL (*)	(102Y)	BMW 6 Series M6 / M5	9.5	9 - 10.5	1874	50	10.7	27.4	10/32	26	220 AA A
1957900	265/40ZR19	(NO)	(98Y)	Porsche Boxster / S / Cayman / S (981) (R)	9.5	9.0 - 10.5	1653	51	10.9	27.5	10/32	28	220 AA A
2166000	275/40ZR19	(MGT)	(101Y)	Maserati Quattroporte / Ghibli	9.5	9.0 - 11.0	1819	51	11.3	27.5	10/32	29	220 AA A
1875700	275/40ZR19	XL (J)	(105Y)	Jaguar XJ (R)	9.5	9.0 - 11.0	2039	50	11.1	27.6	10/32	30	220 AA A
2563200	275/40ZR19	XL (MO)	(105Y)	Mercedes S Class	9.5	9 - 11	2039	50	10.9	27.7	10/32	30	220 AA A
2122700	275/40R19	(MOE) Runflat	101Y	Mercedes S Class	9.5	9.0 - 11.0	1819	51	11.3	27.5	10/32	32	220 AA A
2153200	275/40R19	(*) Runflat	101Y	BMW 7 Series / 5 Series GT / X3 (F)	9.5	9.0 - 11.0	1819	51	11.3	27.5	10/32	32	220 AA A
2200700	275/40R19	(MO)	101Y	Mercedes S Class	9.5	9 - 11	1819	51	10.9	27.7	10/32	28	220 AA A
2295100	275/40ZR19		101Y	Ford Mustang	9.5	9 - 11	1819	51	10.9	27.7	10/32	30	220 AA A
1788800	275/40R19	(*) Runflat	101Y (e)	BMW 5 Series GT / 7 Series / X3 (F)	9.5	9.0 - 11.0	1819	51	11.3	27.5	10/32	36	220 AA A
1723300	285/40ZR19	(103Y)	(103Y)	Ferrari California / Maserati GranCabrio / GranTurismo / S (R)	10	9.5 - 11.0	1929	51	11.5	27.9	10/32	31	220 AA A
1919000	285/40ZR19	(NO)	(103Y)	Porsche Panamera / GTS / S / 4 / 4S / Turbo (R)	10	9.5 - 11.0	1929	51	11.5	27.9	10/32	27	220 AA A
2315400	285/40ZR19	(N1)	(103Y)	Porsche Panamera	10	9.5 - 11	1929	51	11.4	28.0	9/32	27	220 AA A
2306700	285/40ZR19	XL (MO)	(107Y)	Mercedes S Class AMG	10	9.5 - 11.0	2149	50	11.4	28.0	10/32	28	220 AA A
1924900	225/35R19	XL (*) Runflat	88Y	BMW 3 Series (F)	8	7.5 - 9.0	1235	50	9.3	25.2	10/32	22	220 AA A
2050800	225/35R19	XL	88Y	Volkswagen Golf	8	7.5 - 9.0	1235	50	9.3	25.2	10/32	22	220 AA A
1737700	235/35ZR19	(N2)	(87Y)	Porsche Boxster / S / Cayman / S (987) / 911 Carrera / 2 / 2S / 4 / 4S / Turbo / S (997) (F)	8.5	8.0 - 9.5	1201	51	9.5	25.5	10/32	22	220 AA A
1768200	235/35ZR19	XL (K1)	(91Y)	Volkswagen Eos / Passat	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	22	220 AA A
1913600	235/35ZR19	XL (R01)	(91Y)	Audi R8 / Spyder (F)	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	22	220 AA A
1920700	235/35ZR19	XL (L)	(91Y)	Lamborghini Gallardo LP550-2 Balboni / LP560-4 / LP570-4 Superleggera / Superleggera	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	21	220 AA A
2023200	235/35ZR19	XL (MC1)	(91Y)	McLaren MP4-12C / Spider (F)	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	21	220 AA A
2404600	235/35ZR19	XL (AR)	91Y	Alfa Romeo 4C	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	22	220 AA A
2439700	235/35ZR19	XL (ARR)	91Y	Alfa Romeo 4C	8.5	8.0 - 9.5	1356	50	9.5	25.5	10/32	22	220 AA A
2470700	235/35R19	XL (R01)	91Y	Audi Quattro RS3	8.5	8 - 9.5	1356	50	9.5	25.5	10/32	21	220 AA A
1833200	245/35ZR19	XL (*)	(93Y)	BMW 3 Series M3	8.5	8.0 - 9.5	1433	50	9.8	25.8	10/32	24	220 AA A
2544600	245/35ZR19	XL (L)	(93Y)	Lamborghini Huracan	8.5	8 - 9.5	1433	50	9.8	25.8	10/32	23	220 AA A
2031900	245/35R19	XL (MO)	93Y	Mercedes E Class (F)	8.5	8.0 - 9.5	1433	50	9.8	25.8	10/32	23	220 AA A
1997200	255/35ZR19	XL (L)	(96Y)	Lamborghini Aventador LP700-4 (F)	9	8.5 - 10.0	1565	50	10.2	26.2	10/32	26	220 AA A
2049000	255/35ZR19	XL (AM8)	(96Y)	Aston Martin V12 Vantage (F)	9	8.5 - 10.0	1565	50	10.2	26.2	10/32	25	220 AA A
2390100	255/35ZR19	XL (MO)	(96Y)	Mercedes SL AMG / CLS AMG / E Class AMG	9	8.5 - 10.0	1565	50	10.2	26.2	10/32	25	220 AA A
2331800	255/35R19	(*) Runflat	92W (e)	BMW X1 (R)	9	8.5 - 10.0	1389	51	10.2	26.2	10/32	28	220 AA A
1990800	255/35R19	(*) Runflat	92Y (e)	BMW 3 Series / 4 Series (R)	9	8.5 - 10.0	1389	51	10.2	26.2	10/32	28	220 AA A
1773800	255/35ZR19	XL (MO1)	96Y	Lotus Evora / S (R) / Mercedes SL / AMG (F)	9	8.5 - 10.0	1565	50	10.2	26.2	10/32	26	220 AA A
1997500	255/35R19	XL (MO)	96Y	Mercedes CLS / AMG / SL (F)	9	8.5 - 10.0	1565	50	10.2	26.2	10/32	23	220 AA A
2404300	255/35R19	XL (AO)	96Y	Audi A5 / S5	9	8.5 - 10.0	1565	50	10.2	26.0	10/32	24	220 AA A
2411900	255/35R19	XL (MOE) Runflat	96Y (e)	Mercedes C Class	9	8.5 - 10.0	1565	50	10.2	26.0	10/32	38	220 AA A
1787200	265/35ZR19	(N2)	(94Y)	Porsche Boxster / S / Cayman / S (987) (R) / Carrera GT (F)	9.5	9.0 - 10.5	1477	51	10.7	26.3	10/32	26	220 AA A
1833300	265/35ZR19	XL (*)	(98Y)	BMW 3 Series M3	9.5	9.0 - 10.5	1653	50	10.7	26.3	10/32	25	220 AA A
1850400	275/35ZR19	XL (J)	(100Y)	Jaguar XF / XK (R)	9.5	9.0 - 11.0	1764	50	10.9	26.6	10/32	26	220 AA A
2218300	275/35ZR19	(J)	(96Y)	Jaguar F-Type	9.5	9.0 - 11.0	1565	51	10.9	26.6	10/32	29	220 AA A
1921100	275/35R19	(*) Runflat	96Y (e)	BMW 5 Series / 6 Series Gran Coupe (R)	9.5	9.0 - 11.0	1565	51	10.9	25.8	10/32	30	220 AA A
1907000	285/35ZR19	XL	(103Y)	Ford Mustang Boss 302 (R)	10	9.5 - 11.0	1929	50	11.5	26.9	10/32	28	220 AA A
2039100	295/35ZR19	XL (*)	(104Y)	BMW 6 Series M6 / M5	10.5	10 - 11.5	1984	50	11.9	27.1	10/32	28	220 AA A
2544500	305/35ZR19	(L)	(102Y)	Lamborghini Huracan	11	10 - 12	1874	51	12.3	27.4	10/32	32	220 AA A
2022800	245/30R19	XL (*) Runflat	89Y (e)	BMW 1 Series (R)	8.5	8.0 - 9.0	1279	50	9.8	24.8	10/32	23	220 AA A
1995700	255/30ZR19	XL	(91Y)		9	8.5 - 9.5	1356	50	10.2	25.1	10/32	22	220 AA A
2470800	255/30R19	XL (R01)ncs	91Y	Audi Quattro RS3	9	8.5 - 9.5	1356	50	10.2	25.1	10/32	21	220 AA A
1925000	255/30R19	XL (*) Runflat	91Y (e)	BMW 3 Series (R)	9	8.5 - 9.5	1356	50	10.2	25.1	10/32	26	220 AA A
1716400	265/30ZR19	XL	(93Y)		9.5	9 - 10	1433	50	10.7	25.3	9/32	25	220 AA A
2032000	275/30R19	XL (MO)	96Y	Mercedes E Class (R)	9.5	9.0 - 10.0	1565	50	10.7	25.6	10/32	25	220 AA A
2053100	P285/30ZR19	LL Runflat	(87Y) (e)		10	9.5 - 10.5	1201	51	11.2	25.7	10/32	28	220 AA A
2390200	285/30ZR19	XL (MO)	(98Y)	Mercedes SL AMG / CLS AMG / E Class AMG	10	9.5 - 10.5	1653	50	11.4	25.8	10/32	28	220 AA A
1997600	285/30R19	XL (MO)	98Y	Mercedes CLS / AMG / SL (R)	10	9.5 - 10.5	1653	50	11.2	25.7	10/32	25	220 AA A
1737800	295/30ZR19	XL (N2)	(100Y)	Porsche 911 Carrera / 2 / 2S / 4 / 4S / S (997) (R)	10.5	10.0 - 11.0	1764	50	11.9	26.0	10/32	31	220 AA A



# P ZERO

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO</b>													
<b>19" Rim (cont'd)</b>													
1740800	295/30ZR19	XL (R01)	(100Y)	Audi R8 / Spyder (R)	10.5	10.0 - 11.0	1764	50	11.6	26.1	10/32	29	220 AA A
1920800	295/30ZR19	XL (L)	(100Y)	Lamborghini Gallardo LP550-2 Balboni / LP560-4 / LP570-4 Superleggera / Superleggera	10.5	10.0 - 11.0	1764	50	11.6	26.1	10/32	28	220 AA A
2049100	295/30ZR19	XL (AM8)	(100Y)	Aston Martin V12 Vantage (R)	10.5	10.0 - 11.0	1764	50	11.9	26.0	10/32	31	220 AA A
1737900	305/30ZR19	XL (N2)	(102Y)	Porsche 911 Carrera / 4 / 4S / S / Turbo / S (997) (R)	11	10.5 - 11.5	1874	50	12.3	26.3	10/32	31	220 AA A
1777900	305/30ZR19	XL (R01)	(102Y)	Audi R8 / Spyder (R)	11	10.5 - 11.5	1874	50	12.0	26.2	10/32	30	220 AA A
2306100	P355/30ZR19	LL	(99Y)	Dodge Viper	12.5	12.0 - 13.0	1709	51	14.2	27.4	10/32	36	220 AA A
<b>20" Rim</b>													
1767300	235/45R20	XL (M0)	100W	Mercedes GLK (F)	8	7.5 - 9.0	1764	50	9.3	28.3	10/32	28	220 AA A
1791700	245/45ZR20	XL	103Y	Chevrolet Camaro (F/All)	8	7.5 - 9.0	1929	50	9.6	28.7	10/32	32	220 AA A
1827600	265/45ZR20	XL (B)	(108Y)	Bentley Mulsanne	9	8.5 - 10.0	2205	50	10.6	29.5	10/32	31	220 AA A
2060100	265/45ZR20	XL (M0)	108Y		9	8.5 - 10.0	2205	50	10.6	29.5	10/32	30	220 AA A
2206000	265/45R20	(N0)	104Y	Porsche Macan	9	8.5 - 10.0	1984	51	10.5	29.4	9/32	30	220 AA A
2116500	295/45ZR20	Runflat	110Y (e)	Jeep Grand Cherokee SRT-8	10	9.5 - 11.0	2337	51	11.6	30.5	10/32	43	220 AA A
1716300	245/40ZR20	XL	(99Y)	Lincoln MKS	8.5	8 - 9.5	1709	50	9.8	27.7	10/32	26	220 AA A
2166300	245/40ZR20	XL (MGT)	(99Y)	Maserati Quattroporte / Ghibli	8.5	8 - 9.5	1709	50	9.8	27.7	10/32	25	220 AA A
1874400	245/40R20	XL (*) Runflat	99Y (e)	BMW 5 Series GT / 7 Series / X3 (F)	8.5	8.0 - 9.5	1709	50	9.7	27.7	10/32	32	220 AA A
2122600	245/40R20	XL (MOE) Runflat	99Y (e)	Mercedes SL (F) / S Class	8.5	8.0 - 9.5	1709	50	9.9	27.8	10/32	30	220 AA A
1766500	255/40ZR20	XL (N0)	(101Y)	Porsche Panamera / GTS / S / 4 / 4S / Turbo (F)	9	8.5 - 10.0	1819	50	10.3	28.0	11/32	28	220 AA A
2315300	255/40ZR20	XL (N1)	(101Y)	Porsche Panamera (G1 - 2nd generat)	9	8.5 - 10.0	1819	50	10.3	28.0	11/32	27	220 AA A
2540100	255/40ZR20	XL (B1)	(101Y)	Bentley Arnage / Brooklands	9	8.5 - 10	1819	50	10.2	28.0	11/32	26	220 AA A
1767400	255/40R20	XL (M0)	101W	Mercedes GLK (R)	9	8.5 - 10.0	1819	50	10.1	28.0	11/32	29	220 AA A
2128900	255/40R20	XL (AO)	101Y	Audi A6 allroad	9	8.5 - 10.0	1819	50	10.3	28.0	11/32	28	220 AA A
1849300	265/40R20	XL (AA)	104Y	Audi A8 / S8	9.5	9.0 - 10.5	1984	50	10.7	28.7	10/32	29	220 AA A
1874900	275/40ZR20	XL (B)	(106Y)	Bentley Continental GT	9.5	9.0 - 11.0	2094	50	10.9	28.7	10/32	30	220 AA A
2361500	275/40ZR20	XL (BL)	(106Y)	Bentley Continental GT	9.5	9.0 - 11.0	2094	50	10.9	28.7	10/32	30	220 AA A
2441300	275/40ZR20	XL	(106Y)	Dodge Challenger	9.5	9 - 11	2094	50	10.9	28.7	10/32	35	220 AA A
2151300	275/40R20	XL (*) Runflat	106W (e)	BMW X5 / X6	9.5	9.0 - 11.0	2094	50	10.9	28.7	10/32	36	220 AA A
1791600	275/40ZR20	XL	106Y	Chevrolet Camaro / SMS 302 Mustang (R)	9.5	9.0 - 11.0	2094	50	11.0	28.7	10/32	35	220 AA A
1831700	275/40ZR20	XL Runflat	106Y (e)		9.5	9.0 - 11.0	2094	50	10.9	28.7	10/32	35	220 AA A
2422600	285/40R20	(*)	104Y	BMW X5M / X6M	10	9.5 - 11	1984	51	11.4	29.0	10/32	35	220 AA A
2074600	225/35R20	XL (*) Runflat	90Y (e)	BMW 3 Series / 4 Series	8	7.5 - 9.0	1323	50	9.2	26.3	10/32	25	220 AA A
2205900	295/40R20	(N0)	106Y	Porsche Macan	10.5	10.0 - 11.5	2094	51	11.9	29.3	10/32	31	220 AA A
1874600	235/35ZR20		(88Y)	Ferrari F458 Italia (F)	8.5	8.0 - 9.5	1235	51	9.3	26.5	10/32	24	220 AA A
1928800	235/35ZR20	(N0)	(88Y)	Porsche Boxster / S / Cayman / S (981) (F)	8.5	8.0 - 9.5	1235	51	9.5	26.5	10/32	22	220 AA A
2494400	235/35R20	XL (J)	92Y	Jaguar XE	8.5	8 - 9.5	1389	50	9.5	26.5	10/32	21	220 AA A
1929000	245/35ZR20	(N0)	(91Y)	Porsche 911 Carrera / S (991) (F)	8.5	8.0 - 9.5	1356	51	9.7	26.8	10/32	23	220 AA A
1638800	245/35ZR20	XL	(95Y)	Ferrari 599 GTB Fiorano / Maserati GranCabrio / GranTurismo / S / Quattroporte / S / Sport GT / GTS (F)	8.5	8.0 - 9.5	1521	50	9.4	26.8	10/32	23	220 AA A
1715800	245/35ZR20	XL (AMS)	(95Y)	Alfa Romeo 8 C / Aston Martin DBS Coupe / Volante / Virage / Ferrari 612 Scaglietti (F)	8.5	8.0 - 9.5	1521	50	9.4	26.8	10/32	25	220 AA A
1805300	245/35ZR20	XL (K1)	(95Y)	Ferrari 599 GTB Fiorano / Maserati GranCabrio / GranTurismo / S / Quattroporte / GTS (F)	8.5	8.0 - 9.5	1521	50	9.6	26.8	10/32	25	220 AA A
1914100	245/35ZR20	XL	(95Y)	Ferrari California (F)	8.5	8.0 - 9.5	1521	50	9.6	26.8	10/32	25	220 AA A
1935800	245/35ZR20	XL (F)	(95Y)	Ferrari FF / 599 HGTE / 599 SA Aperta / FF (F)	8.5	8.0 - 9.5	1521	50	9.8	26.8	10/32	25	220 AA A
2137400	245/35ZR20	XL (AMV)	(95Y)	Aston Martin Virage	8.5	8 - 9.5	1521	50	9.8	26.8	10/32	25	220 AA A
2490400	245/35ZR20	XL (F01)	(95Y)	Ferrari California T (F)	8.5	8 - 9.5	1521	50	9.8	26.8	10/32	24	220 AA A
2059600	245/35R20	XL Runflat	95Y (e)		8.5	8.0 - 9.5	1521	50	9.7	26.8	10/32	26	220 AA A
1639000	255/35ZR20	XL (J)	(97Y)	Buick Regal GS / Jaguar XF / XK / XKR (F)	9	8.5 - 10.0	1609	50	10.4	27.1	10/32	25	220 AA A
1837600	255/35ZR20	XL (JRS)	(97Y)	Jaguar XKR GT / XKR-S (F)	9	8.5 - 10.0	1609	50	10.4	27.1	10/32	26	220 AA A
2094700	255/35ZR20	XL (F)	(97Y)	Ferrari F12 Berlinetta	9	8.5 - 10.0	1609	50	10.4	27.1	10/32	25	220 AA A
2152000	255/35ZR20	XL (AMX)	(97Y)	Aston Martin DBS (F) / Vanquish	9	8.5 - 10.0	1609	50	10.4	27.1	10/32	26	220 AA A
2445700	255/35ZR20	XL (AM4)	(97Y)	Aston Martin Vanquish	9	8.5 - 10	1609	50	10.2	27.0	10/32	25	220 AA A
2563300	255/35ZR20	XL (M0)	(97Y)	Mercedes S Class	9	8.5 - 10	1609	50	10.2	27.0	10/32	22	220 AA A
1997100	255/35R20	XL (AO)	97Y	Audi A6 / S6	9	8.5 - 10.0	1609	50	10.4	27.1	10/32	25	220 AA A
1928900	265/35ZR20	(N0)	(95Y)	Porsche Boxster / S / Cayman / S (981) (R)	9.5	9.0 - 10.5	1521	51	10.7	27.3	10/32	28	220 AA A
2039200	265/35ZR20	XL (*)	(99Y)	BMW 6 Series M6 / 5 Series M5	9.5	9.0 - 10.5	1709	50	10.4	27.3	10/32	27	220 AA A
2361200	265/35ZR20	XL (J)	(99Y)	Jaguar XFR-S / XJR-S	9.5	9.0 - 10.5	1709	50	10.7	27.3	10/32	27	220 AA A
2034700	265/35R20	XL (AO)	99Y	Audi A7 / S7	9.5	9.0 - 10.5	1709	50	10.4	27.3	10/32	28	220 AA A
2404400	265/35ZR20	XL	99Y	Ford Mustang	9.5	9 - 10.5	1709	50	10.7	27.3	10/32	25	220 AA A
2475000	275/35ZR20	XL (R01)ncs	(102Y)	Audi A6 RS6	9.5	9 - 11	1874	50	10.9	27.6	9/32	30	220 AA A
2563400	275/35ZR20	XL (M0)	(102Y)	Mercedes S Class	9.5	9 - 11	1874	50	10.9	27.6	9/32	27	220 AA A
1874300	275/35R20	XL (*) Runflat	102Y (e)	BMW 5 Series GT / 7 Series / X3 (R)	9.5	9.0 - 11.0	1874	50	10.9	27.7	10/32	35	220 AA A
2122500	275/35R20	XL (MOE) Runflat	102Y (e)	Mercedes SL (R) / S Class	9.5	9.0 - 11.0	1874	50	11.1	27.6	10/32	35	220 AA A
1745900	275/35ZR20	XL (B1)		Bentley Continental GT / GTC	7.5	7 - 8.5	1874	50	8.9	25.9	9/32	28	220 AA A
1720000	285/35ZR20		(100Y)	Alfa Romeo 8 C / Ferrari 612 Scaglietti / Maserati GranCabrio / GranTurismo / S (R)	10	9.5 - 11.0	1764	51	11.7	27.8	10/32	31	220 AA A
1915800	285/35ZR20		(100Y)	Ferrari California (R)	10	9.5 - 11.0	1764	51	11.7	27.8	10/32	31	220 AA A
2166200	285/35ZR20	(MGT)	(100Y)	Maserati Quattroporte	10	9.5 - 11.0	1764	51	11.7	27.8	10/32	32	220 AA A
2490500	285/35ZR20	(F01)	(100Y)	Ferrari California T (R)	10	9.5 - 11.0	1764	51	11.7	27.8	9/32	31	220 AA A







INTRODUCING THE NEW  
**P ZERO™ ALL SEASON PLUS**

---



**P ZERO™**  
ALL SEASON PLUS

---

# P ZERO™

## ALL SEASON *Plus*

### ULTRA HIGH PERFORMANCE

#### 1 PERFORMANCE

Outer Blocks: lateral siping maximizes cornering performance and dry grip while providing improved aquaplaning resistance

#### 2 WINTER PERFORMANCE

Inner Blocks: winter siping technology enhances tread pattern stability and improves snow traction performance. Larger grooves between blocks are designed to capture more snow and expel water faster.

#### 3 COMFORT AND CONTROL

Variable tension control nylon belt optimizes foot print shape resulting in high levels of comfort, greater steering control and better treadwear.

#### 4 COMFORT

Variable size tread elements with a specific pitch sequence minimize noise inside the vehicle.

#### 5 SAFETY

Circumferential grooves provide faster water expulsion improving safety and control in aquaplaning situations.



- **50,000 mile limited treadwear warranty.\***



### PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the Pirelli Confidence *Plus* Plan



# P ZERO ALL SEASON PLUS

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO ALL SEASON PLUS</b>													
<b>17" Rim</b>													
2576000 Q2	215/55R17	XL	98W		7	6 - 7.5	1653	50	8.9	26.3	10/32	24	500 AA A
2442700	225/55R17		97W		7	6 - 8	1609	51	9.2	26.8	10/32	25	500 AA A
2575900 Q2	235/55R17		99W		7.5	6.5 - 8.5	1709	51	9.6	27.2	10/32	30	500 AA A
2442100	225/50R17	XL	98W		7	6 - 8	1653	50	9.2	25.9	10/32	25	500 AA A
2576200 Q2	235/50R17		96W		7.5	6.5 - 8.5	1565	51	9.6	26.3	10/32	26	500 AA A
2442800	215/45R17	XL	91W		7	7 - 8	1356	50	8.4	24.6	10/32	22	500 AA A
2441900	225/45R17	XL	94W		7.5	7 - 8.5	1477	50	8.9	25.0	10/32	24	500 AA A
2442000	235/45R17	XL	97W		8	7.5 - 9	1609	50	9.3	25.4	10/32	25	500 AA A
2442400	245/45R17		95W		8	7.5 - 9	1521	51	9.6	25.7	10/32	26	500 AA A
2443000	245/40R17		91W		8.5	8 - 9.5	1356	51	9.8	24.7	10/32	22	500 AA A
<b>18" Rim</b>													
2442900 Q1	225/60R18		100W		6.5	6 - 8	1764	51	9.0	28.6	10/32	30	500 AA A
2443700 Q1	225/50R18		95W		7	6 - 8	1521	51	9.2	26.9	10/32	24	500 AA A
2575800 Q2	235/50R18	XL	101W		7.5	6.5 - 8.5	1819	50	9.6	27.3	10/32	27	500 AA A
2576100 Q2	215/45R18	XL	93W		7	7 - 8	1433	50	8.4	25.6	10/32	19	500 AA A
2442600	225/45R18	XL	95W		7.5	7 - 8.5	1521	50	8.9	25.9	10/32	25	500 AA A
2576300 Q2	235/45R18	XL	98W		8	7.5 - 9	1653	50	9.3	26.3	10/32	23	500 AA A
2442300	245/45R18	XL	100W		8	7.5 - 9	1764	50	9.6	26.7	10/32	26	500 AA A
2443500	255/45R18		99W		8.5	8 - 9.5	1709	51	10.0	27.0	10/32	28	500 AA A
2442200	225/40R18	XL	92W		8	7.5 - 9	1389	50	9.1	25.1	10/32	23	500 AA A
2443100	235/40R18	XL	95W		8.5	8 - 9.5	1521	50	9.5	25.4	10/32	25	500 AA A
2442500	245/40R18	XL	97W		8.5	8 - 9.5	1609	50	9.8	25.7	10/32	26	500 AA A
2443300 Q1	255/40R18	XL	99W		9	8.5 - 10	1709	50	10.2	26.0	10/32	24	500 AA A
2444000 Q1	255/35R18	XL	94W		9	8.5 - 10	1477	50	10.2	25.0	10/32	21	500 AA A
2444200 Q1	265/35R18	XL	97W		9.5	9 - 10.5	1609	50	10.7	25.3	10/32	23	500 AA A
<b>19" Rim</b>													
2443600	245/45R19	XL	102W		8	7.5 - 9	1874	50	9.6	27.7	10/32	27	500 AA A
2443400 Q1	245/40R19	XL	98W		8.5	8 - 9.5	1653	50	9.8	26.7	10/32	23	500 AA A
2444100 Q1	275/40R19	XL	105W		9.5	9 - 11	2039	50	10.9	27.7	10/32	30	500 AA A
2443800 Q1	255/35R19	XL	96W		9	8.5 - 10	1565	50	10.2	26.0	10/32	21	500 AA A
<b>20" Rim</b>													
2443200	245/45R20	XL	103W		8	7.5 - 9	1929	50	9.6	28.7	10/32	29	500 AA A
2443900	275/40R20	XL	106W		9.5	9 - 11	2094	50	10.9	28.7	10/32	32	500 AA A
2576500 Q2	245/35R20	XL	95W		8.5	8 - 9.5	1521	50	9.8	26.8	10/32	21	500 AA A
2576400 Q2	255/35R20	XL	97W		9	8.5 - 10	1609	50	10.2	27.0	10/32	22	500 AA A
2576600 Q2	275/30R20	XL	97W		9.5	9 - 10	1609	50	10.9	26.5	10/32	22	500 AA A

# P ZERO™ NERO™

## ALL SEASON

### ULTRA HIGH PERFORMANCE

#### WINTER TRACTION

- 1 Increased sipes and void to rubber ratio.
- 2 Asymmetric tread pattern offers optimized footprint for all weather condition.
- 3 **CONSISTENT GRIP FOR ACCELERATION AND BRAKING**  
A solid center rib provides excellent control.
- 4 **WET GRIP**  
Four proportioned channels improve safety and control in aquaplaning situations.



- **45,000 mile limited treadwear warranty.\***
- Available in Run Flat Technology (See Road Hazard Warranty).

#### ORIGINAL EQUIPMENT

Audi  
Cadillac  
Chevrolet  
Ford  
Jaguar  
Maserati  
Mercedes  
Volkswagen  
Volvo





# P ZERO NERO ALL SEASON

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO NERO ALL SEASON</b>													
<b>17" Rim</b>													
1636600	*** P225/55ZR17		97W		7	6.0 - 8.0	1609	51	9.1	26.9	11/32	26	400 AA A
1566100	P235/55ZR17		98W	Ford Mustang / GT	7.5	6.5 - 8.5	1653	51	9.5	27.0	11/32	27	400 AA A
1636500	P225/50ZR17	XL	98W		7	6.0 - 8.0	1653	50	9.2	25.9	11/32	24	400 AA A
1695800	225/45R17	(MO)	91H	Mercedes C Class (F)	7.5	7.0 - 8.5	1356	44	8.7	25.1	10/32	23	400 AA A
1696400	245/40R17	(MO)	91H	Mercedes C Class (R)	8.5	8.0 - 9.5	1356	44	9.8	24.8	11/32	24	400 AA A
<b>18" Rim</b>													
1636700	P235/50ZR18		97W	Ford Mustang / GT	7.5	6.5 - 8.5	1609	51	9.3	27.2	11/32	28	400 AA A
1566500	215/45R18	XL	93W	Mazda 6 / Volvo C30 / S40 / V50	7	7.0 - 8.0	1433	50	8.5	25.5	11/32	24	400 AA A
2076800	255/45R18	(AO)	99V	Audi A7	8.5	8.0 - 9.5	1709	51	10.0	27.0	12/32	27	400 AA A
1696500	225/40R18	XL	92H	Audi A3 / Volkswagen Golf / Golf Pirelli / GTI / Jetta	8	7.5 - 9.0	1389	50	8.4	24.8	10/32	22	400 AA A
1905700	225/40R18	XL (MO)	92H	Mercedes B / C Class (F) / CLA	8	7.5 - 9.0	1389	50	8.4	24.8	10/32	22	400 AA A
1795800	235/40R18	(MO)	91H	Mercedes CLK / E Class (F)	8.5	8.0 - 9.5	1356	44	9.1	25.5	10/32	25	400 AA A
2135100	*** P235/40ZR18	XL	95W	Ford Focus	8.5	8.0 - 9.5	1521	50	9.1	25.5	10/32	24	400 AA A
2563000	235/40ZR18	XL	95W	Ford Focus	8.5	8 - 9.5	1521	50	9.5	25.4	10/32	24	400 AA A
2404200	P245/40R18	Runflat	93V	Cadillac CTS	8.5	8.0 - 9.5	1433	51	9.8	25.7	10/32	29	400 AA A
1830300	245/40R18	XL (MO)	97V	Mercedes E Class (F)	8.5	8.0 - 9.5	1609	50	9.9	25.7	10/32	25	400 AA A
1997800	255/40R18	XL (MO)	99H	Mercedes CLS / SL (F)	9	8.5 - 10.0	1709	50	10.3	26.0	11/32	24	400 AA A
1795700	255/35R18	XL (MO)	94H	Mercedes C Class / CLK / E Class (R)	9	8.5 - 10.0	1477	50	10.2	25.2	11/32	26	400 AA A
1830200	265/35R18	XL (MO)	97V	Mercedes E Class (R)	9.5	9.0 - 10.5	1609	50	10.7	25.3	11/32	26	400 AA A
1900600	*** P285/35ZR18	XL	101W (e)		10	9.5 - 11.0	1819	50	11.3	25.9	9/32	30	400 AA A
1997900	285/35R18	(MO)	97H	Mercedes CLS / SL (R)	10	9.5 - 11.0	1609	44	11.3	25.9	9/32	27	400 AA A
<b>19" Rim</b>													
1757300	P245/50ZR19	XL	104W	Chevrolet Camaro	7.5	7.0 - 8.5	1984	50	9.9	28.6	10/32	33	400 AA A
1957300	P245/45R19	XL (J)	102H	Jaguar XJ (F)	8	7.5 - 9.0	1874	50	9.9	27.7	11/32	28	400 AA A
2471400	245/45R19	(MGT)	98V	Maserati Quattroporte / Ghibli	8	7.5 - 9	1653	51	9.6	27.7	11/32	28	400 AA A
1712400	P245/45ZR19		98W	Ford Mustang / GT	8	7.5 - 9.0	1653	51	9.9	27.7	11/32	31	400 AA A
1873500	255/45R19	XL (AO)	104H	Audi A8	8.5	8.0 - 9.5	1984	50	10.2	28.2	11/32	29	400 AA A
2295200	255/40ZR19		96W	Ford Mustang	9	8.5 - 10	1565	51	10.2	27.0	10/32	25	400 AA A
2471500	275/40R19	(MGT)	101V	Maserati Quattroporte / Ghibli	9.5	9 - 11	1819	51	10.9	27.7	11/32	30	400 AA A
1826500	P275/40ZR19		101W		9.5	9.0 - 11.0	1819	51	11.1	27.6	11/32	32	400 AA A
1957400	P275/40R19	XL (J)	105H	Jaguar XJ (R)	9.5	9.0 - 11.0	2039	50	11.1	27.6	11/32	30	400 AA A
<b>20" Rim</b>													
2026300	245/40R20	XL (J)	99W	Jaguar XJ (F)	8.5	8.0 - 9.5	1709	50	9.7	27.7	10/32	28	400 AA A
2076700	265/40R20	XL (AO)	104H	Audi A8	9.5	9.0 - 10.5	1984	50	10.9	28.5	10/32	29	400 AA A
2494600	265/40R20	XL (AO)ncs	104H	Audi A8	9.5	9 - 10.5	1984	50	10.7	28.3	11/32	29	400 AA A
2441200	275/40ZR20	XL	(106V)	Dodge Challenger	9.5	9.0 - 11.0	2094	50	11.2	28.8	10/32	34	400 AA A
2026200	275/35R20	XL (J)	102W	Jaguar XJ (R)	9.5	9.0 - 11.0	1874	50	10.9	27.7	10/32	29	400 AA A
<b>P ZERO NERO M+S</b>													
<b>24" Rim</b>													
1694500	P255/30ZR24	XL	97W (e)		9	8.5 - 9.5	1609	50	10.0	30.0	10/32	30	400 AA A
1733600	P285/30ZR24	XL	103W (e)		10	9.5 - 10.5	1929	50	11.2	30.7	10/32	32	400 AA A
1679200	P275/25ZR24	XL	96W (e)		10	10	1565	50	10.8	29.4	10/32	31	400 AA A
1779000	P405/25ZR24	XL	116W (e)		13.5	13 - 14	2756	50	15.9	32.0	11/32	49	400 AA A

# P ZERO NERO™ GT

## ULTRA HIGH PERFORMANCE

### 1 P ZERO NERO™ GT IS THE EVOLUTION OF THE P ZERO NERO™

Materials and tread design have been optimized, introducing the latest technological developments. The new compound has a balanced content of silica in order to enhance wear resistance without compromising the sportive feeling of the product in both dry and wet conditions

### 2 PERFORMANCE

Wide continuous ribs and asymmetric design gives increased pattern stiffness and stable footprint for fast cornering reaction and improved handling

### 3 SAFETY

High technology profile structure provides even footprint and pressure distribution for efficient braking in wet and dry conditions.

### 4 BETTER MILEAGE

Optimized tread compound enhances wear resistance leading to better mileage with excellent handling, grip and braking. Safe and sporting driving.





# P ZERO NERO GT

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO NERO GT</b>													
<b>17" Rim</b>													
2373200	225/55ZR17	XL	101W		6.5	6.0 - 8.0	1819	50	8.9	26.8	10/32	26	280 AA A
2383700	215/50ZR17	XL	95Y		7	6 - 7.5	1521	50	8.9	25.5	10/32	22	280 AA A
2492700	225/50R17	XL	98Y		7	6 - 8	1653	50	9.2	25.9	10/32	24	280 AA A
2383100	205/45R17	XL	88V		7	6.5 - 7.5	1235	50	8.3	24.2	10/32	18	280 AA A
2383600	205/45ZR17	XL	88W		7	6.5 - 7.5	1235	50	8.0	24.3	10/32	18	280 AA A
2383900	225/45ZR17	XL	94Y		7.5	7 - 8.5	1477	50	8.9	25.0	10/32	22	280 AA A
2384000	235/45ZR17	XL	97Y		8	7.5 - 9.0	1609	50	9.3	25.5	10/32	23	280 AA A
2373300	245/45ZR17	XL	99Y		8	7.5 - 9.0	1709	50	9.6	25.7	10/32	24	280 AA A
2383800	215/40ZR17	XL	87W		7.5	7.0 - 8.5	1201	50	8.6	23.9	10/32	22	280 AA A
2384100	245/40ZR17		91Y		8.5	8 - 9.5	1356	51	9.8	24.7	10/32	22	280 AA A
2384200	255/40ZR17		(94Y)		9	8.5 - 10	1477	51	10.2	25.0	10/32	24	280 AA A
<b>18" Rim</b>													
2373400	225/45ZR18	XL	95Y		7.5	7.0 - 8.5	1521	50	8.8	26.0	10/32	26	280 AA A
2384500	235/45ZR18	XL	98Y		8	7.5 - 9.0	1653	50	9.1	26.3	10/32	26	280 AA A
2373600	245/45ZR18	XL	100Y		8	7.5 - 9.0	1764	50	9.6	26.7	10/32	26	280 AA A
2373700	255/45ZR18		99Y		8.5	8.0 - 9.5	1709	51	10.2	27.1	10/32	26	280 AA A
2531900	225/40ZR18	XL	(92Y)		8	7.5 - 9	1389	50	9.1	25.1	10/32	21	280 AA A
2596400	225/40ZR18	XL	(92Y)		8	7.5 - 9	1389	50	9.1	25.1	10/32	19	280 AA A
2384600	235/40ZR18	XL	(95Y)		8.5	8.0 - 9.5	1521	50	9.5	25.5	10/32	22	280 AA A
2373500	245/40ZR18	XL	97Y		8.5	8.0 - 9.5	1609	50	9.8	25.7	10/32	25	280 AA A
2451200	215/35ZR18	XL	84Y		7.5	7 - 8.5	1102	50	8.6	23.9	10/32	14	280 AA A
2384400	225/35ZR18	XL	87Y		8	7.5 - 9.0	1201	50	9.0	24.1	10/32	21	280 AA A
2384700	255/35ZR18	XL	(94Y)		9	8.5 - 10.0	1477	50	10.2	25.2	10/32	25	280 AA A
<b>19" Rim</b>													
2373800	225/40ZR19	XL	93Y		8	7.5 - 9.0	1433	50	9.2	26.0	10/32	23	280 AA A
2384800	235/40ZR19	XL	(96Y)		8.5	8.0 - 9.5	1565	50	9.5	26.5	10/32	26	280 AA A
2373900	245/40ZR19	XL	(98Y)		8.5	8.0 - 9.5	1653	50	9.8	26.7	10/32	25	280 AA A
2374000	255/40ZR19	XL	100Y		9	8.5 - 10.0	1764	50	10.2	27.1	10/32	26	280 AA A
2385100	215/35ZR19	XL	85Y (e)		7.5	7.0 - 8.5	1135	50	8.5	24.8	10/32	21	280 AA A
2449400	225/35ZR19	XL	(88Y)		8	7.5 - 9	1235	50	9.1	25.2	10/32	16	280 AA A
2384900	235/35ZR19	XL	(91Y)		8.5	8.0 - 9.5	1356	50	9.4	25.5	10/32	18	280 AA A
2449500	245/35ZR19	XL	(93Y)		8.5	8 - 9.5	1433	50	9.8	25.8	10/32	20	280 AA A
2375300	255/35ZR19	XL	(96Y)		9	8.5 - 10.0	1565	50	10.2	25.9	10/32	25	280 AA A
2449600	255/30ZR19	XL	(91Y)		9	8.5 - 9.5	1356	50	10.2	25.1	10/32	23	280 AA A
2385000	265/30ZR19	XL	(93Y)		9.5	9.0 - 10.0	1433	50	10.8	25.4	10/32	20	280 AA A
2385500 ***	275/30ZR19	XL	(96Y) (e)		9.5	9.0 - 10.0	1565	50	10.7	25.4	10/32	31	280 AA A
2449700	275/30ZR19	XL	(96Y) (e)		9.5	9 - 10	1565	50	10.9	25.6	10/32	21	280 AA A
<b>20" Rim</b>													
2385600	235/30ZR20	XL	(88Y)		8.5	8.5 - 8.5	1235	50	9.5	25.6	9/32	16	280 AA A
2385800	245/30ZR20	XL	(90Y)		8.5	8 - 9	1323	50	9.8	25.8	10/32	17	280 AA A
2385900	255/30ZR20	XL	(92Y)		9	8.5 - 9.5	1389	50	10.2	26.1	10/32	18	280 AA A
2386100	285/25ZR20	XL	(93Y)		10.5	10.5 - 10.5	1433	50	11.6	25.6	10/32	20	280 AA A
2520200	295/25ZR20	XL	(95Y)		10.5	10 - 11	1521	50	11.9	25.8	10/32	21	280 AA A
2520100	305/25ZR20	XL	(97Y)		11	10.5 - 11.5	1609	50	12.3	26.0	10/32	23	280 AA A
<b>21" Rim</b>													
2386300	265/35ZR21	XL	(101Y) (e)		9.5	9 - 10.5	1819	50	10.7	28.3	10/32	26	280 AA A
2386200	255/30ZR21	XL	(93Y)		9	8.5 - 9.5	1433	50	10.2	27.0	10/32	19	280 AA A
2386500	305/30ZR21	XL	(104Y) (e)		11	10.5 - 11.5	1984	50	12.3	28.2	9/32	29	280 AA A
2386600	355/25ZR21	XL	(107Y) (e)		13	12.5 - 13.5	2149	50	14.4	28.0	10/32	33	280 AA A
<b>22" Rim</b>													
2386800	255/35ZR22	XL	99Y (e)		9	8.5 - 10	1709	50	10.2	29.0	10/32	24	280 AA A
2500000	235/30ZR22	XL	(90Y) (e)		8.5	8.5 - 8.5	1323	50	9.5	27.6	10/32	17	280 AA A
2386700	245/30ZR22	XL	(92Y)		8.5	8.0 - 9.0	1389	50	9.8	27.8	10/32	27	280 AA A
2518800 ***	245/30ZR22	XL	(92Y) (e)		8.5	8.0 - 9.0	1389	50	9.8	27.8	10/32	27	280 AA A
2386900	255/30ZR22	XL	(95Y)		9	8.5 - 9.5	1521	50	10.2	28.1	10/32	20	280 AA A
2543300	265/30ZR22	XL	(97Y)		9.5	9 - 10	1609	50	10.7	28.3	10/32	22	280 AA A
2387300	305/30ZR22	XL	105Y (e)		11	10.5 - 11.5	2039	50	12.3	29.3	10/32	30	280 AA A
2543400	285/25ZR22	XL	(95Y)		10.5	10.5 - 10.5	1521	50	11.6	27.6	10/32	21	280 AA A
2543500	295/25ZR22	XL	(97Y)		10.5	10 - 11	1609	50	11.9	27.8	10/32	23	280 AA A
2387400	315/25ZR22	XL	(101Y) (e)		11.5	11 - 12	1819	50	12.8	28.2	10/32	26	280 AA A
<b>23" Rim</b>													
2387500	315/25ZR23	XL	102Y (e)		11.5	11 - 12	1874	50	12.8	29.2	10/32	27	280 AA A
<b>P ZERO NERO</b>													
<b>17" Rim</b>													
1463000	215/45ZR17	XL	91Y		7	7.0 - 8.0	1356	50	8.6	24.8	10/32	22	220 AA A
1424100	205/40ZR17	XL	84W	Fiat 500 Abarth	7.5	7.0 - 8.0	1102	50	8.4	23.6	10/32	20	220 AA A

\*\*\* - Phasing out



# P ZERO SYSTEM

- The first “system” in the world that combined two tires with different treads; directionale at the front axle, asimmetrico at the rear.
- The asymmetric rear tires external area tread blocks provide cornering performance, stability and precise handling.
- The directional front tire's arrow shaped design provides excellent water expulsion and safety in potential aquaplaing situations.
- Ultra High Performance tire developed for prestige and premium OEM's.



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO ASIMMETRICO</b>													
<b>15" Rim</b>													
0731900	205/50ZR15		86W	Lamborghini Countach	6.5	5.5 - 7.5	1168	51	8.3	23.1	10/32	19	140 AA
2096000	225/50ZR15	(nolbl)	91Y	Lamborghini Countach	7	6.0 - 8.0	1356	51	8.9	24.0	12/32	22	140 AA
0898600	345/35ZR15		95Y	Lamborghini Countach	12	11.5 - 13.5	1521	51	14.0	24.8	12/32	33	140 AA
<b>17" Rim</b>													
0888900	215/50ZR17		91Y	Ferrari 348	7	6.0 - 7.5	1356	51	8.7	25.7	10/32	24	220 AA A
1044300	235/50ZR17	(nolbl)	96W	Jaguar S Type	7.5	6.5 - 8.5	1565	51	9.6	26.3	9/32	26	140 AA
0862100	245/50ZR17		99Y	Jaguar XK	7.5	7.0 - 8.5	1709	51	9.7	26.7	12/32	29	220 AA A
2541200	255/45ZR17		(98Y)	Ferrari 348	8.5	8 - 9.5	1653	51	10.0	26.1	10/32	27	140 AA
2593900	255/45ZR17	(F)	(98Y)	Ferrari F456	8.5	8 - 9.5	1653	51	10.0	26.1	10/32	27	140 AA
2541400	245/40ZR17		(91Y)	Ferrari F40	8.5	8 - 9.5	1356	51	9.8	24.7	11/32	22	140 AA
2593700	285/40ZR17		(100Y)	Ferrari F456	10	9.5 - 11	1764	51	11.4	26.0	10/32	31	140 AA
2593200	335/35ZR17		(106Y)	Ferrari F40	12	11 - 13	2094	51	13.5	26.2	9/32	38	140 AA
<b>18" Rim</b>													
890400	255/45ZR18		99Y	Jaguar XK	8.5	8.0 - 9.5	1709	51	10.4	27.0	10/32	29	140 AA
0960000	285/45ZR18		103Y	Bentley Continental T2	9.5	9.0 - 10.5	1929	51	11.3	28.1	10/32	33	140 AA
0926100	255/40ZR18		95Y	Jaguar XJR	9	8.5 - 10.0	1521	51	10.2	26.1	10/32	26	140 AA
2593500	265/40ZR18		(97Y)	Ferrari F355	9.5	9 - 10.5	1609	51	10.7	26.3	9/32	27	140 AA
2593600	275/40ZR18	(F)	(99Y)	Ferrari F360	9.5	9 - 11	1709	51	10.9	26.7	8/32	29	140 AA
2593000	235/35ZR18		(86Y)	Lamborghini Diablo	8.5	8 - 9.5	1168	51	9.5	24.4	10/32	18	140 AA
2592900	335/30ZR18		(102Y)	Lamborghini Diablo	12	11.5 - 12.5	1874	51	13.5	25.9	11/32	32	140 AA
<b>19" Rim</b>													
1315100	255/45ZR19	XL (nolbl)	104Y	Bentley Arnage / Arnage HDC / Jaguar XJ Security	8.5	8.0 - 9.5	1984	50	10.2	28.1	8/32	29	140 AA
0732100	255/40ZR19		96Y	Jaguar XJ	9	8.5 - 10.0	1565	51	10.6	27.0	12/32	27	220 AA A
<b>P ZERO DIREZIONALE</b>													
<b>16" Rim</b>													
2541500	205/55ZR16	(N3)	91Y	Porsche 914 / 924 / 928 / 944 / 911 / 912 / 964 / Boxster	6.5	5.5 - 7.5	1356	51	8.4	24.9	10/32	21	140 AA
<b>18" Rim</b>													
2593800	215/45ZR18	(F)	(89Y)	Ferrari F360	7	7 - 8	1279	51	8.4	25.6	9/32	19	140 AA
0899100	245/45ZR18		96Y	Jaguar XK	8	7.5 - 9.0	1565	51	9.8	26.7	9/32	26	140 AA
2593300	225/40ZR18		(88Y)	Ferrari F355	8	7.5 - 9	1235	51	9.1	25.1	10/32	19	140 AA

# P ZERO ROSSO



- Directional tread pattern for the front axle ensures excellent grip on both wet and dry roads, while the rear asymmetric tire offers improves safety and control.
- Ideal balance between performance and comfort for medium to high-powered cars.
- Ultra High Performance tire developed for prestige and premium OEM's.

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P ZERO ROSSO</b>													
<b>17" Rim</b>													
2540300	205/50ZR17	(N3)	89Y	Porsche 911 / Boxster	6.5	5.5 - 7.5	1279	51	8.4	25.1	10/32	19	220 AA A
2540500	255/40ZR17	(N3)	(94Y)	Porsche 911 / Boxster	9	8.5 - 10	1477	51	10.2	25.0	9/32	23	220 AA A
<b>18" Rim</b>													
1363000	255/55ZR18	XL (N0) (nolbl)	109Y	Porsche Cayenne / Volkswagen Touareg	8	7.0 - 9.0	2271	50	10.6	29.1	10/32	35	300 AA A
1333400	245/50R18	(*) (nolbl)	100W	BMW 7 Series	7.5	7.0 - 8.5	1764	51	9.9	27.7	10/32	29	220 AA A
0984900	255/50ZR18		102Y	Bentley Arnage	8	7.0 - 9.0	1874	51	10.4	27.9	10/32	30	220 AA A
1514700	245/45ZR18	XL (nolbl)	(100Y)	Ferrari 612 Scaglietti (F)	8	7.5 - 9.0	1764	50	9.5	26.7	10/32	32	220 AA A
1569500	255/45R18	(M0) (nolbl)	99Y	Mercedes S Class (F/All)	8.5	8.0 - 9.5	1709	51	10.2	27.1	10/32	28	220 AA A
2540400	225/40ZR18	(N4)	(88Y)	Porsche 911 / Boxster	8	7.5 - 9	1235	51	9.1	25.1	10/32	19	220 AA A
1558000	225/40ZR18	XL (nolbl)	(92Y)		8	7.5 - 9.0	1389	50	9.1	25.1	10/32	22	220 AA A
2540900	235/40ZR18	(N4)	(91Y)	Porsche 911	8.5	8 - 9.5	1356	51	9.5	25.4	10/32	21	220 AA A
1591500	255/40ZR18	XL (M0) (nolbl)	(99Y)	Mercedes CLK AMG / CLS AMG (F)	9	8.5 - 10.0	1709	50	10.2	25.9	9/32	28	220 AA A
1514800	285/40ZR18	(nolbl)	(101Y)	Maserati Quattroporte / S (R)	10	9.5 - 11.0	1819	51	11.7	27.0	10/32	30	220 AA A
1118500	245/35ZR18		88Y	Ferrari F50 / Lamborghini Murcielago (F)	8.5	8.0 - 9.5	1235	51	9.6	24.5	9/32	21	160 AA A
2540600	265/35ZR18	(N4)	(93Y)	Porsche 911	9.5	9 - 10.5	1433	51	10.7	25.3	9/32	23	220 AA A
1509300	275/35R18	(M0) (nolbl)	95Y		9.5	9.0 - 11.0	1521	51	10.8	25.6	9/32	26	220 AA A
1591600	285/35ZR18	XL (M0) (nolbl)	(101Y)	Mercedes CLK AMG / CLS AMG (R)	10	9.5 - 11.0	1819	50	11.5	26.0	11/32	29	220 AA A
2593100	295/35ZR18		(99Y)	Ferrari F575/F550	10.5	10 - 11.5	1709	51	11.9	26.1	9/32	29	160 AA A
2540700	285/30ZR18	(N4)	(93Y)	Porsche 911	10	9.5 - 10.5	1433	51	11.4	24.8	9/32	22	220 AA A
2541000	295/30ZR18	XL (N4)	(98Y)	Porsche 911	10.5	10 - 11	1653	50	11.9	25.0	9/32	24	220 AA A
2541100	315/30ZR18	(N4)	(98Y)	Porsche 911	11	10.5 - 11.5	1653	51	12.6	25.5	9/32	28	220 AA A
1189000	335/30ZR18		102Y	Ferrari F50 / Lamborghini Murcielago (R)	12	11.5 - 12.5	1874	51	13.6	26.1	9/32	32	160 AA A
<b>19" Rim</b>													
1521700	255/50R19	(M0) (nolbl)	103W	Mercedes M Class / AMG / R Class / AMG (F/All)	8	7.0 - 9.0	1929	51	10.5	29.0	10/32	32	300 AA A
1521500	235/45R19	(*) (nolbl)	95W	BMW X3 (F)	8	7.5 - 9.0	1521	51	9.4	27.2	11/32	28	220 AA A
1486600	245/45R19	(*) (nolbl)	98Y	BMW 7 Series (F)	8	7.5 - 9.0	1653	51	9.8	27.6	10/32	28	220 AA A
1688600	275/45ZR19	XL (N1) (nolbl)	108Y	Porsche Cayenne / S / Volkswagen Touareg	9	8.5 - 10.5	2205	50	10.8	28.9	10/32	34	300 AA A
1609700	285/45R19	(M0) (nolbl)	107W	Mercedes M Class / AMG / R Class / AMG (R)	9.5	9.0 - 10.5	2149	51	11.4	29.1	10/32	34	220 AA A
1572000	245/40ZR19	XL (F)	(98Y)	Ferrari 612 Scaglietti (F)	8.5	8.0 - 9.5	1653	50	9.8	26.7	10/32	26	160 AA A
1521600	255/40R19	(*) (nolbl)	96W	BMW X3 (R)	9	8.5 - 10.0	1565	51	10.2	27.2	10/32	30	220 AA A
1587000	275/40ZR19	XL (B1) (nolbl)	(105Y)	Bentley Continental GT / Flying Spur	9.5	9.0 - 11.0	2039	50	11.1	27.6	10/32	30	220 AA A
1839300	275/40ZR19	XL (B0) (nolbl)	(105Y)	Bentley Continental Flying Spur / Continental GT	9.5	9.0 - 11.0	2039	50	11.1	27.6	10/32	29	220 AA A
1486700	275/40R19	(*) (nolbl)	101Y	BMW 7 Series (R)	9.5	9.0 - 11.0	1819	51	11.1	27.6	10/32	29	220 AA A
1336500	235/35ZR19	XL (nolbl)	(91Y)	Maserati GT Coupe	8.5	8.0 - 9.5	1356	50	9.3	25.4	10/32	23	220 AA A
1518500	255/35ZR19	XL (A0) (nolbl)	(96Y)	Audi A4 / A5 / A6 / RS4 / S4 / S5 / TT	9	8.5 - 10.0	1565	50	10.2	25.9	9/32	24	220 AA A
1573200	285/35ZR19	(F)	(99Y)	Ferrari F430 / Maserati Quattroporte / S (R)	10	9.5 - 11.0	1709	51	11.7	26.9	10/32	30	220 AA A
<b>20" Rim</b>													
1574200	265/45ZR20	(M0) (nolbl)	104Y	Mercedes G Class / M Class / R Class	9	8.5 - 10.0	1984	51	10.9	29.3	10/32	32	300 AA A
1618000	275/45ZR20	XL (A0) (nolbl)	110Y	Audi Q7	9	8.5 - 10.5	2337	50	10.6	29.6	10/32	35	300 AA A
1688500	275/40ZR20	XL (N1) (nolbl)	106Y	Porsche Cayenne / Turbo / Turbo S (All) / Saleen H302 / Supercharged / S281 Extreme / Supercharged / S351 (R) / SMS 570 / 570X Challenger (F) / Volkswagen Touareg	9.5	9.0 - 11.0	2094	50	11.2	28.9	10/32	34	300 AA A
1743900	295/40ZR20	XL (A0)	110Y	Audi Q7	10.5	10.0 - 11.5	2337	50	11.9	29.3	10/32	35	300 AA A
1604900	*** 275/35ZR20	XL (B) (nolbl)		Bentley Continental Flying Spur / Continental GT / Saleen H302 / H302 Supercharged / S281 Extreme / Supercharged (F)	9.5	9.0 - 11.0	2039	50	10.9	27.7	11/32	31	220 AA A
1363300	315/35ZR20	(nolbl)	106Y		11	10.5 - 12.5	2094	51	12.9	28.7	10/32	44	240 AA A
<b>21" Rim</b>													
1613200	295/35ZR21	XL (N0)	107Y	Porsche Cayenne GTS / Volkswagen Touareg	10.5	10.0 - 11.5	2149	50	11.9	29.1	10/32	34	300 AA A
<b>P ZERO ROSSO DIREZIONALE</b>													
<b>18" Rim</b>													
2378400	245/45ZR18	XL	(100Y)	Maserati Quattroporte	8	7.5 - 9.0	1764	50	9.6	26.8	9/32	27	220 AA A
2593400	255/40ZR18		(95Y)	Ferrari F575/F550	9	8.5 - 10	1521	51	10.2	26.0	9/32	24	160 AA A
<b>19" Rim</b>													
1515900	245/40ZR19	XL (nolbl)	(98Y)	Maserati GranCabrio / GranTurismo / S / Quattroporte / S (F) / Jaguar XK / XKR	8.5	8.0 - 9.5	1653	50	9.9	26.7	10/32	29	220 AA A
1461400	225/35ZR19	(nolbl)	(84Y)	Ferrari F430 (F)	8	7.5 - 9.0	1102	51	9.1	25.4	10/32	20	220 AA A

# Cinturato™

The Cinturato Family stands out for its higher performance, safety and durability, all with less environmental impact. Drivers who demand the best without compromise will appreciate the superior eco-friendly tread compound and technologically advanced polymers for better grip on both wet and dry roads. The range is an expression of Pirelli's "Green Performance" philosophy that stands out for its longer wear, decreased rolling resistance and improved fuel economy.



# Cinturato

TIRE	BRAKING	HANDLING	COMFORT	WEAR LIFE	DESCRIPTION
 <p><b>Cinturato</b> P7 ALL SEASON</p>					<p>Tailor made to meet the exacting specifications of the top Original Equipment manufacturers, ensuring a strong emphasis on performance handling while providing all season performance with improved grip on wet and excellent stability in potential hydroplaning situations. The Cinturato P7 All Season employs the newest technologies to reduce environmental impact in terms of noise and fuel consumption.</p>
 <p><b>Cinturato</b> P7 ALL SEASON PLUS</p>					<p>Higher performance, safety and durability with less environmental impact in one incredible tire: Its exclusive tread pattern harnesses all the elements, while providing longer wear up to 70,000 miles* and improved fuel economy. Drivers who demand the best without compromise will appreciate the Cinturato P7 All Season Plus's superior eco-friendly tread compound and technologically advanced polymers for better grip on both wet and dry roads. Accept no substitutes. Get the tire that offers everything and compromises nothing.</p> 
 <p><b>Cinturato</b> P7</p>					<p>An expression of the Pirelli Green Performance philosophy: a perfect synergy of performance, safety, driving pleasure and attention to the environment. Cinturato P7 is an eco-compatible high performance choice for medium to high-powered cars.</p>

**LEGEND PERFORMANCE:**



\* For complete warranty details, visit an authorized Pirelli Dealer or US.Pirelli.com

\*\* From internal Pirelli testing

# Cinturato P7

## ALL SEASON

### GRAND TOURING

#### 1 ALL SEASON PERFORMANCE

Longitudinal siping and high level lateral siping density provide greater lateral stability for all season performance including winter and wet conditions.

#### 2 STEERING RESPONSE

Robust tread elements and optimized tread compound stiffness provide excellent steering response in all weather conditions.

#### 3 SAFETY AND ACUSTIC COMFORT

Innovative tread pattern with four wide longitudinal grooves provides excellent water expulsion and lowers both external and internal noise.



- Available in Run Flat Technology (See Road Hazard Warranty).

#### ORIGINAL EQUIPMENT

Audi  
BMW  
Cadillac  
Fiat  
Mercedes  
MINI  
Porsche  
Volvo  
Volkswagen





# CINTURATO P7 ALL SEASON

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>CINTURATO P7 ALL SEASON</b>													
<b>15" Rim</b>													
2013800	185/55R15		82H	Fiat 500	6	5.0 - 6.5	1047	44	7.1	23.0	11/32	18	500 A A
<b>16" Rim</b>													
2217200	195/55R16	(*) Runflat	87V	Mini Cooper	6	5.5 - 7	1201	51	7.9	24.4	10/32	21	500 A A
2150100	195/45R16	XL	84V	Fiat 500	6.5	6.0 - 7.5	1102	50	7.8	22.9	10/32	18	500 A A
<b>17" Rim</b>													
2050500	225/60R17	(*) Runflat	99H	BMW X3	6.5	6.0 - 8.0	1709	44	9.0	27.6	10/32	34	500 A A
1999200	205/55R17	(*) Runflat	91H	Mini Cooper Countryman / Paceman	6.5	5.5 - 7.5	1356	44	8.5	25.9	10/32	26	500 A A
2080500	225/55R17	XL (AO)	101V	Audi A6	7	6.0 - 8.0	1819	50	9.3	26.8	10/32	24	500 A A
1998800	225/55R17	(AO)	97H	Audi A4 allroad / A6	7	6.0 - 8.0	1609	44	9.4	27.0	10/32	25	500 A A
2145100	225/55R17	(*) Runflat	97H	BMW 3 Series GT	7	6.0 - 8.0	1609	44	9.4	27.0	10/32	29	500 A A
1999000	245/55R17	(*) Runflat	102H (e)	BMW X3	7.5	7.0 - 8.5	1874	44	10.0	27.6	10/32	35	500 A A
2041300	205/50R17	(*) Runflat	89V	BMW 1 Series	6.5	5.5 - 7.5	1279	51	8.6	25.3	11/32	23	500 A A
2374300	225/50R17	(MOE) Runflat	94H	Mercedes C Class	7	6.0 - 8.0	1477	44	9.2	25.9	10/32	28	500 A A
2041100	225/50R17	(*) Runflat	94V	BMW 3 Series	7	6.0 - 8.0	1477	51	9.3	26.0	10/32	28	500 A A
2246100	205/45R17	(*) Runflat	88V	Mini Cooper	7	6.5 - 7.5	1235	50	8.1	24.3	9/32	20	500 A A
2031700	225/45R17	(MOE) Runflat	91H	Mercedes A Class / B Class / CL / CLA	7.5	7.0 - 8.5	1356	44	9.0	25.1	10/32	24	500 A A
2419600	225/45R17		91H	Volkswagen Golf	7.5	7 - 8.5	1356	44	8.9	25.0	10/32	23	500 A A
2512000	225/45R17	(AO)	91H	Audi A3	7.5	7 - 8.5	1356	44	8.9	25.0	10/32	21	500 A A
2220500	245/45R17	(AO)	95H	Audi A8	8	7.5 - 9	1521	51	9.6	25.7	10/32	26	500 A A
<b>18" Rim</b>													
2145200	225/50R18	XL (*) Runflat	99V	BMW 3 Series GT	7	6.0 - 8.0	1709	50	9.4	27.0	10/32	28	500 A A
2137100	245/50R18	(*) Runflat	100V	BMW X3	7.5	7.0 - 8.5	1764	51	10.0	27.7	11/32	34	500 A A
2048900	225/45R18	(*) Runflat	91V	BMW 3 Series / X1 / Mini Countryman	7.5	7.0 - 8.5	1356	51	9.1	26.1	11/32	27	500 A A
2374200	225/45R18	XL (MOE) Runflat	95H	Mercedes C-Class (F)	7.5	7.0 - 8.5	1521	50	8.9	25.9	10/32	25	500 A A
2324500	235/45R18	XL	98V	Volvo S60 / V60	8	7.5 - 9.0	1653	50	9.5	26.5	10/32	24	500 A A
2131000	245/45R18	XL (AO)	100H	Audi A4 allroad / A6	8	7.5 - 9.0	1764	50	9.8	26.8	11/32	25	500 A A
2141300	255/45R18	(AO)	99H	Audi A7	8.5	8.0 - 9.5	1709	44	10.2	27.2	10/32	27	500 A A
2345400	225/40R18	XL	92H	Volkswagen Golf	8	7.5 - 9	1389	50	9.1	25.1	10/32	19	500 A A
2498200	225/40R18	XL (MOE) Runflat	92H	Mercedes B-Class / CLA	8	7.5 - 9	1389	50	9.1	25.1	9/32	23	500 A A
2325300	225/40R18	(*) Runflat	92V	BMW 2 Series	8	7.5 - 9	1389	50	9.1	25.1	9/32	22	500 A A
2220400	245/40R18	(AO)	93H	Audi A4	8.5	8.0 - 9.5	1433	44	9.8	25.7	11/32	26	500 A A
2374100	245/40R18	XL (MOE) Runflat	97H	Mercedes C-Class (R)	8.5	8.0 - 9.5	1609	50	9.8	25.7	10/32	28	500 A A
2038100	245/40R18	XL	97V	Volvo S80 / V70	8.5	8.0 - 9.5	1609	50	9.9	25.9	11/32	24	500 A A
<b>19" Rim</b>													
2369400	225/45R19	XL (*) Runflat	96V	BMW 3 Series GT	7.5	7 - 8.5	1565	50	8.9	27.0	10/32	27	500 A A
2181700	245/45R19	XL (MOE) Runflat	102H	Mercedes S Class (F)	8	7.5 - 9.0	1874	50	9.8	27.8	11/32	32	500 A A
2157100	255/45R19	(NO)	100V	Porsche Panamera (G1 - 2nd generat)	8.5	8.0 - 9.5	1764	51	10.0	28.1	10/32	26	500 A A
2418000	225/40R19	XL (*) Runflat	93V	BMW 4 Series	8	7.5 - 9.0	1433	50	9.1	26.1	10/32	24	500 A A
2324400	235/40R19	XL	96V	Volvo S60 / V60	8.5	8.0 - 9.5	1565	50	9.5	26.4	10/32	24	500 A A
2141400	255/40R19	XL (AO)	100H	Audi A7	9	8.5 - 10.0	1764	50	10.2	27.0	10/32	27	500 A A
2181300	275/40R19	(MOE) Runflat	101H	Mercedes S Class (R)	9.5	9.0 - 11.0	1819	44	11.2	27.8	10/32	34	500 A A
2157200	285/40R19	(NO)	103V	Porsche Panamera (G1 - 2nd generat)	10	9.5 - 11.0	1929	51	11.4	28.0	10/32	28	500 A A
2146800	255/35R19	XL Runflat	96V (e)	Cadillac CTS	9	8.5 - 10.0	1565	50	10.2	26.0	10/32	28	500 A A
<b>20" Rim</b>													
2128400	255/40R20	XL (NO)	101V	Porsche Panamera (F)	9	8.5 - 10.0	1819	50	11.4	32.3	10/32	27	500 A A
2128500	295/35R20	XL (NO)	105V	Porsche Panamera (R)	10.5	10.0 - 11.5	2039	50	11.4	32.3	10/32	32	500 A A

# Cinturato P7

## ALL SEASON *Plus*

### GRAND TOURING

#### 1 HIGH MILEAGE

Optimized profile and innovative materials provide lower rolling resistance and lower weight leading to reduced fuel consumption, lower CO<sub>2</sub> emissions and improved mileage.

#### 2 ALL SEASON PERFORMANCE

Longitudinal siping and high level lateral siping density provide greater lateral stability for all season performance including winter and wet conditions.

#### 3 NOISE REDUCTION

Pitch sequence and phasing optimize tread design which provides lower internal noise.

#### 4 SAFETY AND ACOUSTIC COMFORT

Innovative tread pattern with four wide longitudinal grooves provides excellent water expulsion and lowers both external and internal noise.



- **70,000 mile limited treadwear warranty.\***



### PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the *Pirelli Confidence Plus Plan*



# CINTURATO P7 ALL SEASON PLUS

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>CINTURATO P7 ALL SEASON PLUS</b>													
<b>16" Rim</b>													
2253300	205/60R16		92H		6	5.5 - 7.5	1389	44	8.4	25.9	10/32	23	700 A A
2253400	205/60R16		92V		6	5.5 - 7.5	1389	51	8.4	25.9	10/32	23	700 A A
2362700	215/60R16		95H		6.5	6.0 - 7.5	1521	44	8.9	26.3	10/32	24	700 A A
2362600	215/60R16		95V		6.5	6.0 - 7.5	1521	51	8.9	26.3	10/32	24	700 A A
2253500	225/60R16		98H		6.5	6.0 - 8.0	1653	44	9.2	26.8	10/32	26	700 A A
2339700	195/55R16		87V		6	5.5 - 7.0	1201	51	8.1	24.6	10/32	20	700 A A
2362900	205/55R16		91H		6.5	5.5 - 7.5	1356	44	8.6	25.0	10/32	21	700 A A
2338000	205/55R16	XL	94V		6.5	5.5 - 7.5	1477	50	8.6	25.0	10/32	21	700 A A
2362300	215/55R16	XL	97H		7	6.0 - 7.5	1609	50	9.1	25.5	10/32	22	700 A A
2254900	225/55R16		95H		7	6.0 - 8.0	1521	44	9.4	25.9	10/32	24	700 A A
2338800	225/55R16		95V		7	6.0 - 8.0	1521	51	9.4	25.9	10/32	24	700 A A
2340100	205/50R16		87H		6.5	5.5 - 7.5	1201	44	8.6	24.3	10/32	20	700 A A
2338700	205/50R16		87V		6.5	5.5 - 7.5	1201	51	8.6	24.3	10/32	20	700 A A
<b>17" Rim</b>													
2340200	225/60R17		99H		6.5	6.0 - 8.0	1709	44	9.2	27.8	10/32	28	700 A A
2362800	225/60R17		99V		6.5	6.0 - 8.0	1709	51	9.2	27.8	10/32	28	700 A A
2338100	215/55R17		94H		7	6.0 - 7.5	1477	44	9.1	26.5	10/32	23	700 A A
2362100	215/55R17		94V		7	6.0 - 7.5	1477	51	9.1	26.5	10/32	23	700 A A
2253600	225/55R17		97H		7	6.0 - 8.0	1609	44	9.4	27.0	10/32	25	700 A A
2253700	225/55R17		97V		7	6.0 - 8.0	1609	51	9.4	27.0	10/32	25	700 A A
2362400	235/55R17		99H		7.5	6.5 - 8.5	1709	44	9.8	27.4	10/32	27	700 A A
2361900	205/50R17	XL	93H		6.5	5.5 - 7.5	1433	50	8.6	25.3	10/32	21	700 A A
2362500	205/50R17	XL	93V		6.5	5.5 - 7.5	1433	50	8.6	25.3	10/32	21	700 A A
2362200	215/50R17		91V		7	6.0 - 7.5	1356	51	9.1	25.7	10/32	22	700 A A
2362000	225/50R17		94V		7	6.0 - 8.0	1477	51	9.4	26.1	10/32	24	700 A A
2340300	235/50R17		96V		7.5	6.5 - 8.5	1565	51	9.8	26.5	10/32	25	700 A A
2340400	245/50R17		99V		7.5	7.0 - 8.5	1709	51	10.2	26.9	10/32	28	700 A A
2339100	215/45R17	XL	91V		7	7.0 - 8.0	1356	50	8.6	24.8	10/32	22	700 A A
2288300	225/45R17	XL	94H		7.5	7.0 - 8.5	1477	50	9.1	25.1	10/32	23	700 A A
2309600	225/45R17	XL	94V		7.5	7.0 - 8.5	1477	50	9.1	25.1	10/32	23	700 A A
2338200	235/45R17	XL	97H		8	7.5 - 9.0	1609	50	9.5	25.5	10/32	24	700 A A
2338300	235/45R17	XL	97V		8	7.5 - 9.0	1609	50	9.5	25.5	10/32	24	700 A A
2403800	245/45R17	XL	99H		8	7.5 - 9	1709	50	9.6	25.7	10/32	25	700 A A
<b>18" Rim</b>													
2339300	235/50R18		97V		7.5	6.5 - 8.5	1609	51	9.8	27.5	10/32	26	700 A A
2337700	245/50R18		100V		7.5	7.0 - 8.5	1764	51	10.2	27.9	10/32	30	700 A A
2339000	225/45R18	XL	95V		7.5	7.0 - 8.5	1521	50	9.0	26.1	10/32	24	700 A A
2338600	235/45R18		94H		8	7.5 - 9.0	1477	44	9.3	26.5	10/32	25	700 A A
2339200	235/45R18		94V		8	7.5 - 9.0	1477	51	9.3	26.5	10/32	25	700 A A
2337600	245/45R18	XL	100V		8	7.5 - 9.0	1764	50	9.8	26.8	10/32	28	700 A A
<b>19" Rim</b>													
2337900	225/55R19		99H		7	6.0 - 8.5	1709	44	9.4	29.0	10/32	29	700 A A
2339500	245/45R19		98V		8	7.5 - 9.0	1653	51	9.8	27.8	10/32	28	700 A A
2339800	255/45R19		100V		8.5	8.0 - 9.5	1984	51	10.2	28.2	10/32	30	700 A A
2338500	235/40R19	XL	96V		8.5	8.0 - 9.5	1565	50	9.7	26.6	10/32	26	700 A A
2339400	245/40R19	XL	98V		8.5	8.0 - 9.5	1653	50	10.0	26.9	10/32	27	700 A A
2337800	255/40R19	XL	100V		9	8.5 - 10.0	1764	50	10.4	27.2	10/32	28	700 A A
<b>20" Rim</b>													
2338400	245/45R20		99V		8	7.5 - 9.0	1709	51	9.8	28.8	10/32	31	700 A A
2339900	245/40R20	XL	99V		8.5	8.0 - 9.5	1709	50	10.0	27.9	10/32	35	700 A A



One tire. Four seasons. **No compromises.**



POWER IS NOTHING WITHOUT CONTROL



## Higher performance, safety and durability

Experience the all-new Cinturato P7™ All Season Plus. Its exclusive tread pattern harnesses the elements, while providing longer wear for up to **70,000 miles** and **improved fueleconomy**. Plus, its eco-friendly tread compound and advanced polymers grip better on wet and dry roads—with an up to **14% shorter stopping distance** in wet conditions.\*

\*All figures listed as compared to previous generation Pirelli All Season Tires.

**Get the tire that offers everything and compromises nothing.**



INTRODUCING THE NEW

**Cinturato P7**  
ALL SEASON Plus

[www.US.Pirelli.com](http://www.US.Pirelli.com)

/PirelliNorthAmerica



# P6 FOUR SEASONS™ PLUS

- High Performance all season tire for dry, wet and light snow conditions focused on passenger comfort.
- Original equipment and replacement sizes to fit most passenger applications.
- **45,000 mile limited treadwear warranty\*** (mileage warranty not valid for original equipment).

## P6 FOUR SEASONS PLUS

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P6 FOUR SEASONS PLUS</b>													
<b>18" Rim</b>													
1694100	P225/60R18		99H	Ford Five Hundred / Taurus / Taurus X	6.5	6.0 - 8.0	1709	44	9.1	28.8	11/32	27	500 A A
1694000	P225/55R18		97H	Ford Five Hundred / Taurus / Taurus X / Mercury Sable	7	6.0 - 8.0	1609	44	9.1	27.8	11/32	27	500 A A

# P6 FOUR SEASONS™

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P6 FOUR SEASONS</b>													
<b>17" Rim</b>													
1800900	P225/50R17	(A0)	94H	Audi A4 / A5	7	6.0 - 8.0	1477	44	9.2	25.9	11/32	24	400 A A
1788700	P245/45R17	(A0)	95H	Audi A4 / A5	8	7.5 - 9.0	1521	44	9.8	25.7	11/32	25	400 A A
<b>18" Rim</b>													
1621100	235/40R18	XL	95H	Audi A4 / Volkswagen CC / Eos / Passat	8.5	8.0 - 9.5	1521	50	9.6	24.6	10/32	23	400 A A
1779100	P245/40R18	(A0)	93H	Audi A4 / A5	8.5	8.0 - 9.5	1433	44	9.9	25.7	11/32	27	400 A A
1621200	*** 245/40R18	(M0)	93V	Mercedes CLS (F)	8.5	8.0 - 9.5	1433	51	9.9	25.7	14/32	27	400 A A
1770900	*** 245/40R18	XL	97V	Volvo S80	8.5	8.0 - 9.5	1609	50	9.9	25.7	14/32	27	400 A A
<b>19" Rim</b>													
1572200	*** P255/40R19	XL	100V	Audi A8 / Jaguar XJ	9	8.5 - 10.0	1764	50	10.0	27.0	11/32	29	400 A A

<b>P6000</b>													
<b>15" Rim</b>													
2134800	185/70R15	(N2)	89W	Porsche 928 / 944 / 964 / 968 (F)	5.5	4.5 - 6.0	1279	51	7.6	25.4	10/32	19	180 A A
2201400	195/65R15	(N2)	91W	Porsche 928 / 944 / 964 / 968 (F)	6	5.5 - 7.0	1356	51	8.0	25.0	10/32	19	180 A A
2201500	215/60R15	(N2)	94W	Porsche 928 / 944 / 964 / 968 (R)	6.5	6.0 - 7.5	1477	51	8.8	25.3	10/32	22	180 A A

<b>P6000 POWERGY</b>													
<b>17" Rim</b>													
1368200	235/50ZR17		96Y	Jaguar S Type / XJ / XJS	7.5	6.5 - 8.5	1565	51	9.8	26.3	10/32	25	180 A A
<b>18" Rim</b>													
1330600	235/50ZR18		97W	Jaguar XJ	7.5	6.5 - 8.5	1609	51	9.3	27.1	10/32	25	180 A A

<b>P600</b>													
<b>15" Rim</b>													
1044400	235/60R15		98W	Jaguar XJ / XJS	7	6.5 - 8.5	1653	51	9.1	26.1	10/32	26	180 A A

\* For complete warranty details visit [US.Pirelli.com](http://US.Pirelli.com)

\*\*\* - Phasing out

# Cinturato P7™

## GRAND TOURING SUMMER

### COMFORTABLE DRIVING EXPERIENCE:

- 1 Innovative hybrid material provides balanced pressure distribution which leads to even treadwear.
- 2 Optimized tread design with specific pitch sequence reduces rolling noise.
- 3 **INCREASED STEERING RESPONSE**  
Compact central blocks and robust external areas reduce tire distortion during fast cornering.
- 4 **IMPROVED WET GRIP**  
Four wide longitudinal grooves provide excellent water expulsion for safety and control in potential aquaplaning situations.



- Available in Run Flat Technology (See Road Hazard Warranty).

### ORIGINAL EQUIPMENT





# CINTURATO P7

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>CINTURATO P7</b>													
<b>16" Rim</b>													
1860500	205/55R16	Runflat	91V		6.5	5.5 - 7.5	1356	51	8.5	25.1	11/32	24	260 AA A
1911900	205/55R16	(*)	91V	BMW 1 Series / 3 Series	6.5	5.5 - 7.5	1356	51	8.5	25.1	11/32	17	260 AA A
2040200	205/55R16	(*) Runflat	91W	BMW 1 Series	6.5	5.5 - 7.5	1356	51	8.5	25.1	11/32	24	260 AA A
2041500	205/55R16	(MO)	91W	Mercedes C Class / SLK / CLK	6.5	5.5 - 7.5	1356	51	8.5	25.1	11/32	20	260 AA A
1830100	225/55R16	XL (MO)	99Y	Mercedes E Class	7	6 - 8	1709	50	9.2	25.7	10/32	22	260 AA A
1951800	225/50R16	(*)	92V	BMW 3 Series	7	6.0 - 8.0	1389	51	9.3	25.1	11/32	22	260 AA A
1948200	225/50R16	(*)	92W	BMW 3 Series	7	6.0 - 8.0	1389	51	9.3	25.1	11/32	22	260 AA A
<b>17" Rim</b>													
2001800	205/55R17	(*)	91V	Mini Cooper Countryman / Paceman	6.5	5.5 - 7.5	1356	51	8.5	25.9	11/32	20	260 AA A
2050400	205/55R17	(*) Runflat	91V	Mini Cooper Countryman / Paceman	6.5	5.5 - 7.5	1356	51	8.4	25.9	11/32	27	260 AA A
2145000	225/55R17	(*) Runflat	97W	BMW 3 Series GT	7	6.0 - 8.0	1609	51	9.1	26.8	11/32	29	260 AA A
1951500	225/55R17	(*) Runflat	97Y	BMW 5 Series / 6 Series Gran Coupe	7	6.0 - 8.0	1609	51	9.3	26.9	11/32	32	260 AA A
2010200	245/55R17	(*) Runflat	102V (e)	BMW 5 Series / X3	7.5	7.0 - 8.5	1874	51	10.0	27.6	11/32	35	260 AA A
2005500	205/50R17	(*) Runflat	89V	BMW 1 Series (F/All)	6.5	5.5 - 7.5	1279	51	8.6	25.2	11/32	23	260 AA A
2265200	205/50R17	(*) Runflat	89W	BMW 1 Series	6.5	5.5 - 7.5	1279	51	8.4	25.1	11/32	22	260 AA A
2307600	225/50R17	(*) Runflat	94H	BMW X1	7	6.0 - 8.0	1477	44	9.2	25.9	10/32	27	260 AA A
2307700	225/50R17	(*) Runflat	94V	BMW X1	7	6.0 - 8.0	1477	51	9.2	25.9	10/32	27	260 AA A
2028000	225/50R17	(*) Runflat	94W	BMW 3 Series / X1	7	6.0 - 8.0	1477	51	9.3	26.0	11/32	27	260 AA A
2245800	205/45R17	XL (*) Runflat	88W	Mini Cooper	7	6.5 - 7.5	1235	50	8.1	24.3	11/32	20	260 AA A
2005700	225/45R17	(*) Runflat	91V	BMW 1 Series (R) / 3 Series	7.5	7.0 - 8.5	1356	51	8.7	25.1	11/32	24	260 AA A
2029200	225/45R17	(MO)	91V	Mercedes A Class / B Class	7.5	7.0 - 8.5	1356	51	9.0	25.1	11/32	20	260 AA A
2005800	225/45R17	(*) Runflat	91W	BMW 1 Series (R) / 3 Series	7.5	7.0 - 8.5	1356	51	8.7	25.1	11/32	24	260 AA A
2153800	225/45R17	(MO)	91W	Mercedes C Class	7.5	7 - 8.5	1356	51	8.9	25.0	10/32	19	260 AA A
2288900	225/45R17	(AO)	91Y	Audi A3	7.5	7.0 - 8.5	1356	51	9.0	25.1	11/32	19	260 AA A
1830000	245/45R17	XL (MO)	99Y	Mercedes CLS / E Class / SL	8	7.5 - 9.0	1709	50	9.8	25.7	11/32	22	260 AA A
2153700	245/40R17	(MO)	91W	MERCEDES C CLASS	8.5	8 - 9.5	1356	51	9.8	24.7	10/32	21	260 AA A
<b>18" Rim</b>													
2245600	225/50R18	(*) Runflat	95W	BMW 3 Series GT (F/All)	7	6.0 - 8.0	1521	51	9.4	27.0	10/32	28	260 AA A
2127200	245/50R18	(MOE) Runflat	100W	Mercedes S Class (F)	7.5	7.0 - 8.5	1764	51	9.7	27.8	11/32	32	260 AA A
2136900	245/50R18	(*) Runflat	100W	BMW X3	7.5	7.0 - 8.5	1764	51	10.1	27.6	11/32	34	260 AA A
1873000	225/45R18	(*) Runflat	91V	BMW X1 (F/All) / Mini Countryman	7.5	7.0 - 8.5	1356	51	9.1	26.1	11/32	26	260 AA A
1836900	225/45R18	(*) Runflat	91W	BMW X1 (F/All)	7.5	7.0 - 8.5	1356	51	9.1	26.1	11/32	26	260 AA A
2041000	225/45R18	(*) Runflat	91Y	BMW 3 Series / 4 Series	7.5	7.0 - 8.5	1356	51	8.9	25.9	11/32	26	260 AA A
2374400	225/45R18	XL (MOE) Runflat	95Y	Mercedes C-Class (F)	7.5	7.0 - 8.5	1521	50	8.9	25.9	10/32	25	260 AA A
2074800	245/45R18	(*) Runflat	96Y	BMW 5 Series / 6 Series Gran Coupe (F/All)	8	7.5 - 9.0	1565	51	9.8	26.8	10/32	29	260 AA A
2245500	255/45R18	(*) Runflat	99W	BMW 3 Series GT (R)	8.5	8.0 - 9.5	1709	51	10.2	27.2	10/32	29	260 AA A
2127300	275/45R18	(MOE) Runflat	103W	Mercedes S Class (R)	9	8.5 - 10.5	1929	51	11.0	28.0	11/32	35	260 AA A
2245900	205/40R18	(*) Runflat	86W	Mini Cooper	7.5	7 - 8	1168	50	8.3	24.4	10/32	18	260 AA A
2011700	245/40R18	(AO)	93Y	Audi A4 / A5	8.5	8.0 - 9.5	1433	51	9.8	25.8	11/32	23	260 AA A
2011600	245/40R18	XL (AO)	97Y	Audi A4 / A5	8.5	8.0 - 9.5	1609	50	9.6	25.7	11/32	24	260 AA A
2302300	245/40R18	XL (MOE) Runflat	97Y	Mercedes C-Class (R)	8.5	8.0 - 9.5	1609	50	9.8	25.7	10/32	28	260 AA A
1873100	255/40R18	(*) Runflat	95V (e)	BMW X1 (R)	9	8.5 - 10.0	1521	51	10.2	25.9	11/32	29	260 AA A
1872600	255/40R18	(*) Runflat	95W (e)	BMW X1 (R)	9	8.5 - 10.0	1521	51	10.2	25.9	11/32	29	260 AA A
1990600	255/40R18	(*) Runflat	95Y (e)	BMW 3 Series / 4 Series (R)	9	8.5 - 10.0	1521	51	10.2	26.0	11/32	28	260 AA A
2074700	275/40R18	(*) Runflat	99Y	BMW 5 Series / 6 Series Gran Coupe (R)	9.5	9.0 - 11.0	1709	51	11.2	26.8	10/32	31	260 AA A

# P4<sup>TM</sup>

## FOUR SEASONS *Plus*

### STD TOURING

**NEW!**

**1 EXCELLENT ALL SEASON TRACTION**

Variable angle grooves ensure a mechanical grip for improved steering response especially in wet weather and light snow conditions.

**2 EXTENDED TREAD LIFE**

Reinforced shoulders enhance stability for high mileage, even treadwear and fuel savings.

**3 SAFETY**

Central longitudinal grooves maximize water expulsion for outstanding safety and control.

**4 DURABILITY**

Continuous central rib improves both tire durability and overall handling.



- **90,000 mile limited treadwear warranty (T rated) \*‡**



### PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the Pirelli Confidence *Plus* Plan



# P4 FOUR SEASONS PLUS

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>P4FOUR SEASONS PLUS</b>													
<b>14" Rim</b>													
2508900	P185/65R14		86T		5.5	5.0 - 6.5	1168	44	7.3	23.3	12/32	18	760 A B
<b>15" Rim</b>													
2509100	P185/65R15		88T		5.5	5.0 - 6.5	1235	44	7.5	24.4	12/32	19	760 A B
2509500	P195/65R15		91T		6	5.5 - 7.0	1356	44	7.8	24.9	12/32	22	760 A B
2509800	P205/65R15		94T		6	5.5 - 7.5	1477	44	8.0	25.5	12/32	23	760 A B
2510100	P215/65R15		96T		6.5	6.0 - 7.5	1565	44	8.5	26.1	12/32	24	760 A B
2509000	P185/60R15		84T		5.5	5.0 - 6.5	1102	44	7.3	23.7	10/32	18	760 A B
2509300	P195/60R15		88T		6	5.5 - 7.0	1235	44	7.7	24.3	12/32	19	760 A B
2509600	P205/60R15		91T		6	5.5 - 7.5	1356	44	8.0	24.7	12/32	21	760 A B
2510000 ***	P215/60R15		94T		6.5	6.0 - 7.5	1477	44	8.7	25.4	12/32	22	760 A B
<b>16" Rim</b>													
2510500	P205/65R16		94T		6	5.5 - 7.5	1477	44	8.1	26.3	12/32	24	760 A B
2510700	P215/65R16		98T		6.5	6.0 - 7.5	1653	44	8.8	26.7	12/32	26	760 A B
2510400	P205/60R16		92T		6	5.5 - 7.5	1389	44	8.1	25.6	12/32	22	760 A B
2510600	P215/60R16		95T		6.5	6.0 - 7.5	1521	44	8.5	26.2	12/32	25	760 A B
2510800	P225/60R16		98T		6.5	6.0 - 8.0	1653	44	8.8	26.7	12/32	27	760 A B
2510300	P205/55R16		91T		6.5	5.5 - 7.5	1356	44	8.6	25.1	12/32	22	760 A B
<b>17" Rim</b>													
2511000	P215/65R17		99T		6.5	6.0 - 7.5	1709	44	8.9	28.0	12/32	28	760 A B
2510900	P215/60R17		96T		6.5	6.0 - 7.5	1565	44	8.7	27.0	12/32	26	760 A B
2511300	P225/60R17		99T		6.5	6.0 - 8.0	1709	44	8.9	27.0	12/32	28	760 A B
2511200	P225/55R17		97T		7	6.0 - 8.0	1609	44	9.3	26.8	12/32	26	760 A B
2511100	P225/50R17		94T		7	6.0 - 8.0	1477	44	9.0	25.9	12/32	24	760 A B
<b>18" Rim</b>													
2511400	P215/55R18		95T		7	6.0 - 7.5	1521	44	8.6	27.4	12/32	25	760 A B


<b>P4 FOUR SEASONS</b>													
<b>15" Rim</b>													
1700600 ***	P185/60R15		84T		5.5	5.0 - 6.5	1102	44	7.3	23.7	10/32	18	760 A B
<b>17" Rim</b>													
1867500 ***	P225/55R17		97T		7	6.0 - 8.0	1609	44	9.3	26.8	12/32	26	760 A B

# **SCORPION™**

The Scorpion Family provides premium options that respond to the needs of all types of drivers, from mainly on-road use on the most modern SUV's to the most-demanding 4x4's. Pirelli's constant commitment to premium innovation has yielded the newest Scorpion Verde All Season Plus featuring quiet comfort, safety and better mileage. The Scorpion family range takes advantage of the latest materials, structures and tread patterns to extend the best of Pirelli premium performance to the rapidly growing SUV, CUV and Light Truck segments.

# SCORPION



TIRE	BRAKING	HANDLING	COMFORT	OFF ROAD	WEAR LIFE	DESCRIPTION
<p><b>SCORPION</b> ZERO ASIMMETRICO</p>						<p>Engineered for sporty performance on road and safe driving in off road conditions. Advanced construction technology and sophisticated manufacturing techniques deliver stability when cornering, exceptional handling on the wet and dry roads and high grip while braking. These elements along with its aggressive appearance make Scorpion Zero Asimmetrico the best choice for changeover and cosmetic tuning.</p>
<p><b>SCORPION</b> VERDE ALL SEASON</p>						<p>Scorpion Verde All Season is the all road solution to fit the most modern SUV and Crossover vehicles. It delivers excellent braking performance on both wet and dry, high durability and low rolling resistance. The optimized tread design guarantee comfort and low cabin noise. Developed according to the specifications of the luxury OEM's</p>
<p><b>SCORPION</b> VERDE ALL SEASON Plus</p>						<p>The perfect tire for your SUV or Crossover. Using the latest technology and innovation, it delivers high performance and exceptional handling in all weather conditions, with increased mileage. It meets the rigorous demands of its drivers and provides a quieter, more comfortable ride for up to 65,000 miles*. It also achieves a significant reduction in rolling resistance, resulting in improved fuel efficiency.</p> 
<p><b>SCORPION</b> STR</p>						<p>The Scorpion STR is an ideal balance for road and moderate off road use. It combines the strength traditionally associated with Pirelli's on road performance with effective off road capabilities. Comfort, high mileage and regular treadwear meet the high OEM product requirements which make it the ultimate choice for SUV's, off road vehicles and light trucks.</p>
<p><b>SCORPION</b> ATR</p>						<p>Scorpion ATR is a safe and versatile all terrain tire for use on all surfaces. It facilitates demanding off-road driving with high shock resistance on uneven surfaces while simultaneously providing braking and cornering safety in on road conditions.</p>

**LEGEND PERFORMANCE:**





# SCORPION™ ZERO™

## ASIMMETRICO

### ULTRA HIGH PERFORMANCE LIGHT TRUCK & SUV ALL SEASON

#### 1 INCREASED GRIP

Asymmetric tread design with Z profile improves traction and braking safety on all surfaces.

#### 2 HANDLING AT HIGH SPEED

Continuous longitudinal block profiles and compact shoulder blocks provide stability and tread pattern stiffness for precise performance and control.

#### 3 COMFORTABLE DRIVING EXPERIENCE

Continuous central rib provides even treadwear for prolonged tire life and reduced noise. Great option for changeover and cosmetic tuning.



- Available in Run Flat Technology (See Road Hazard Warranty).

#### ORIGINAL EQUIPMENT

Audi  
Dodge  
Ford  
Jeep  
Land Rover  
Mercedes  
Porsche  
Volkswagen  
Volvo





# SCORPION ZERO ASIMMETRICO

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION ZERO ASIMMETRICO</b>													
<b>17" Rim</b>													
1820600	235/65R17		104H	Volvo XC60 / XC90	7	6.5 - 8.5	1984	44	9.5	29.1	10/32	33	520 A A
1766900	235/60R17	(MO)	102V	Mercedes GLK (F/All)	7	6.5 - 8.5	1874	51	9.3	28.1	10/32	31	420 A A
1722300	235/55R17		99V	Volvo XC70	7.5	6.5 - 8.5	1709	51	9.8	27.2	10/32	28	420 A A
1767000	255/55R17	(MO)	104V	Mercedes GLK (R)	8	7.0 - 9.0	1984	51	10.4	28.3	10/32	32	420 A A
<b>18" Rim</b>													
1755800 ***	235/60R18		103H	Volvo XC60	7	6.5 - 8.5	1929	44	9.4	29.1	10/32	31	520 A A
1748300	P255/55R18	XL (AO)	109H	Audi Q7	8	7.0 - 9.0	2271	50	10.6	29.0	10/32	36	300 AA A
1748500	P255/55R18	XL (AO)	109V	Audi Q7	8	7.0 - 9.0	2271	50	10.6	29.0	10/32	36	420 A A
1787100	235/50R18		97H	Volkswagen Tiguan	7.5	6.5 - 8.5	1609	44	9.3	27.0	10/32	27	520 A A
<b>19" Rim</b>													
1619700	255/50ZR19	XL	107Y	Land Rover Range Rover Sport / Volvo XC90	8	7.0 - 9.0	2149	50	10.3	29.1	10/32	35	420 A A
1754300	235/45R19	XL	99V	Volvo XC70	8	7.5 - 9.0	1709	50	9.6	27.4	10/32	28	420 A A
<b>20" Rim</b>													
1788400	235/45R20	XL (MO)	100H	Mercedes GLK	8	7.5 - 9.0	1764	50	9.3	28.3	10/32	29	420 A A
1680900	245/45R20	Runflat	99W (e)	Jeep Grand Cherokee SRT-8	8	7.5 - 9.0	1709	51	9.4	28.6	10/32	34	260 A A
1825300	255/45R20	XL	105V	Volvo XC60 / XC90	8.5	8.0 - 9.5	2039	50	10.1	29.3	10/32	34	420 A A
1842500	265/45R20	XL (MO)	108H	Mercedes ML Class	9.5	9 - 11	2205	50	10.9	27.6	10/32	35	420 A A
1748200	275/45R20	XL (AO)	110H	Audi Q7	9	8.5 - 10.5	2337	50	10.7	29.8	10/32	37	520 A A
1629900	275/40ZR20	XL	106Y	Land Rover Range Rover Sport	9.5	9.0 - 11.0	2094	50	10.8	28.9	10/32	35	420 A A
<b>22" Rim</b>													
2075700	P275/45R22	XL	112V	Ford F150 Harley Davidson	9	8.5 - 10.5	2469	50	11.0	31.9	10/32	41	420 A A
2466800	P265/40R22	XL	105W		9.5	9 - 10.5	2039	50	10.7	30.4	10/32	35	420 A A
2075300	P265/40R22	XL	105W (e)	Ford Edge	9.5	9.0 - 10.5	2039	50	10.7	30.4	10/32	35	420 A A
1487100	305/40ZR22	XL	114W (e)	Dodge Ram SRT-10	11	10.0 - 12.0	2601	50	12.4	31.5	10/32	42	420 AA A
2215500	265/35ZR22	XL	102W		9.5	9.0 - 10.5	1874	50	10.8	29.4	10/32	34	420 A A
2215400	285/35ZR22	XL	106W		10	9.5 - 11.0	2094	50	11.4	29.9	10/32	38	420 AA A
1506000	305/35ZR22	XL	110W (e)		11	10.0 - 12.0	2337	50	12.2	30.6	10/32	38	420 AA A
2075800	295/30ZR22	XL	103W		10.5	10.0 - 11.0	1929	50	11.6	29.1	10/32	37	420 AA A
1550000	335/25ZR22	XL	105Y (e)		12	11.5 - 12.5	2039	50	13.1	28.9	10/32	37	420 AA A
<b>23" Rim</b>													
1487300	305/35ZR23	XL	111W		11	10 - 12	2403	50	12.3	31.4	10/32	41	420 AA A
<b>24" Rim</b>													
1619200	295/40ZR24	XL	114W (e)		10.5	10.0 - 11.5	2601	50	11.9	33.3	10/32	44	420 AA A
1619300	285/35ZR24	XL	108W (e)		10	9.5 - 11.0	2205	50	11.1	31.9	10/32	38	420 AA A
1561400	305/35ZR24	XL	112W (e)		11	10.0 - 12.0	2469	50	12.4	32.7	10/32	43	420 AA A
<b>26" Rim</b>													
1756500	295/30R26	XL	107W		10.5	10 - 11	2149	50	11.9	33.0	13/32	38	420 AA A
1631400	305/30R26	XL	109V (e)		11	10.5 - 11.5	2271	50	12.3	33.2	10/32	41	420 AA A
<b>SCORPION ZERO</b>													
<b>18" Rim</b>													
1780200	235/60R18		103V	Land Rover LR2	7	6.5 - 8.5	1929	51	9.6	28.9	10/32	32	400 A A
1780300	255/60R18	XL (ZZ)	112V	Land Rover Range Rover / Discovery	7.5	7.0 - 9.0	2469	50	10.2	30.1	10/32	36	400 A A
1417600	255/55R18	XL (NO) (ZZ)	109V	Porsche Cayenne / Volkswagen Touareg	8	7.0 - 9.0	2271	50	10.2	29.3	10/32	35	400 A A
0916900	285/55R18		113V		9	8.0 - 10.0	2535	51	11.8	30.6	10/32	40	300 A A
<b>19" Rim</b>													
1780400	255/55R19	XL (ZZ)	111V	Land Rover Range Rover / Discovery	8	7.0 - 9.0	2403	50	10.3	30.1	10/32	37	400 A A
1792100	275/55R19	(MO)	111H	Mercedes G Class / M Class	8.5	7.5 - 9.5	2403	44	11.3	30.9	10/32	42	460 A A
1560200	275/55R19	(MO)	111V	Mercedes G Class AMG	8.5	7.5 - 9.5	2403	51	11.3	30.9	10/32	42	460 A A
<b>20" Rim</b>													
1780500	255/50R20	XL	109Y	Land Rover Discovery	8	7.0 - 9.0	2271	50	10.3	30.1	10/32	36	400 A A
<b>21" Rim</b>													
1721900	295/40R21	XL (MO)	111V (e)	Mercedes G Class / GL AMG / M Class	10.5	10.0 - 11.5	2403	50	11.9	30.4	10/32	39	300 A A

# SCORPION™

## VERDE™ ALL SEASON

### CUV/SUV TOURING

Excellent Choice for Crossover and SUV

**1 LOW FUEL CONSUMPTION**

Optimized profile and innovative materials provide lower rolling resistance and lower weight leading to reduced fuel consumption and lower CO2 emissions.

**2 GREAT ALL SEASON PERFORMANCE**

Longitudinal siping and high level lateral siping density provide greater lateral stability for all season performance including winter and wet conditions.

**3 SAFETY IN WET CONDITIONS**

Large contact patch and four longitudinal grooves provide control and excellent water expulsion.

**4 ACOUSTIC COMFORT**

Pitch sequence and phasing optimize tread design and provide lower internal noise.



- Available in Run Flat Technology (See Road Hazard Warranty).

#### ORIGINAL EQUIPMENT

BMW  
Jeep  
Land Rover  
Lincoln  
Mercedes  
Porsche  
Volkswagen  
Volvo





# SCORPION VERDE ALL SEASON

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION VERDE ALL SEASON</b>													
<b>16" Rim</b>													
1966300	P225/70R16		103H		6.5	6.0 - 7.5	1929	44	9.2	28.7	10/32	33	600 A A
1953500	215/65R16		98V	Volvo XC70	6.5	6.0 - 7.5	1653	51	8.9	27.2	10/32	24	600 A A
<b>17" Rim</b>													
2190200	P265/70R17		113H		8	7.0 - 9.0	2535	44	10.4	31.4	11/32	47	600 A A
2369200	235/65R17	XL	108V		7.0	6.5 - 8.5	2205	50	9.6	29.2	11/32	33	600 A A
2320700	285/65R17		116H		8.5	8.0 - 10.0	2756	44	11.7	31.9	11/32	44	600 A A
2203000	215/60R17		96V		6.5	6.0 - 7.5	1565	51	8.7	27.0	11/32	25	600 A A
1953600	235/55R17		99V		7.5	6.5 - 8.5	1709	51	9.6	27.2	11/32	29	600 A A
<b>18" Rim</b>													
1916600	235/60R18		103H	Volvo XC60	7	6.5 - 8.5	1929	44	9.8	29.5	11/32	29	600 A A
2489900	235/60R18	(MOE)	103H	Mercedes GLK	7	6.5 - 8.5	1929	44	9.4	29.1	11/32	35	520 A A
2572300	235/60R18		103H	Volvo XC90	7	6.5 - 8.5	1929	44	9.4	29.1	11/32	30	600 A A
2496200	235/60R18	XL (LR)	107H	Land Rover Discovery Sport	7	6.5 - 8.5	2149	50	9.4	29.1	11/32	34	520 A A
2056000	P235/60R18	XL	107V	Range Rover Evoque	7	6.5 - 8.5	2149	50	9.6	30.3	11/32	31	600 A A
2423300	235/60R18	XL (LR)	107V	Land Rover LR2	7	6.5 - 8.5	2149	50	9.4	29.1	11/32	34	600 A A
2205200	235/60R18	(NO)	103V	Porsche Macan (F)	7	6.5 - 8.5	1929	51	9.4	29.1	11/32	31	520 A A
2468200	235/60R18	XL (LR)	107V	Ford Edge	7	6.5 - 8.5	2149	50	9.4	29.1	11/32	32	600 A A
1862400	255/60R18	XL	112H		7.5	7.0 - 9.0	2469	50	10.2	30.4	11/32	38	600 A A
2310700	265/60R18		110H		8	7.5 - 9.5	2337	44	10.7	30.5	11/32	41	600 A A
2320600	285/60R18	XL	120V		8.5	8.0 - 10.0	3086	50	11.7	31.7	11/32	48	600 A A
2323210	225/55R18		98V		7	6 - 8	1653	51	9.2	27.8	11/32	29	600 A A
1806300	255/55R18	XL	109H	Volkswagen Touareg	8	7.0 - 9.0	2271	50	10.4	29.3	11/32	36	600 A A
2297900	255/55R18	(*) Runflat	109H	BMW X5/X6	8	7 - 9	2271	50	10.4	29.0	11/32	42	520 A A
2205100	255/55R18	(NO)	105V	Porsche Macan	8	7.0 - 9.0	2039	51	10.4	29.0	11/32	30	520 A A
2252200	235/50R18	(AO)	97H	Audi Q3	7.5	6.5 - 8.5	1609	51	9.6	27.3	11/32	26	600 A A
1953400	235/50R18		97V	Volvo XC70	7.5	6.5 - 8.5	1609	51	9.3	27.2	11/32	27	600 A A
<b>19" Rim</b>													
2119400	235/65R19	XL (LR)	109V	Land Rover Range Rover HSE / Sport	7	6.5 - 8.5	2271	50	9.4	31.1	10/32	31	600 A A
2489500	235/55R19	(MOE)	101H	Mercedes GLK	7.5	6.5 - 8.5	1819	44	9.6	29.2	11/32	34	520 A A
1959800	P235/55R19	XL	105V	Land Rover LR2 / Range Rover Evoque	7.5	6.5 - 8.5	2039	50	9.8	29.3	11/32	31	600 A A
2205000	235/55R19	(NO)	101V	Porsche Macan	7.5	6.5 - 8.5	1819	51	9.6	29.2	11/32	31	520 A A
1862500	255/55R19	XL	111H		8	7.0 - 9.0	2403	50	10.6	30.1	11/32	38	600 A A
1953900	255/50R19	XL (MO)	107H	Mercedes ML Class	8	7.0 - 9.0	2149	50	10.3	29.1	11/32	35	600 A A
2204900	255/50R19	(NO)	103V	Porsche Macan	8	7.0 - 9.0	1929	51	10.4	29.1	11/32	30	520 A A
2297800	255/50R19	(*) Runflat	107H	BMW X5/X6	8	7 - 9	2149	50	10.4	29.1	11/32	41	520 A A
1805100	265/50R19	XL	110H	Volkswagen Touareg	8.5	7.5 - 9.5	2337	50	11.1	29.6	11/32	38	600 A A
1805000	265/50R19	XL (NO)	110V	Porsche Cayenne / S / Turbo	8.5	7.5 - 9.5	2337	50	11.1	29.6	11/32	38	520 A A
1863900	255/40R19		96H	Volkswagen Tiguan	9	8.5 - 10.0	1565	44	10.4	27.1	11/32	29	600 A A
<b>20" Rim</b>													
2154900	255/55R20	XL (LR)	110W	Land Rover Range Rover HSE	7.5	6.6 - 8.5	2337	50	10.4	31.0	10/32	34	600 A A
2166700	255/55R20	XL (LR)	110V	Land Rover Range Rover Sport	7.5	6.6 - 8.5	2337	50	10.4	31.0	10/32	34	600 A A
2372900	245/50R20		102V	Ford Edge	7.5	7 - 8.5	1874	51	10.0	29.7	10/32	33	600 A A
2154200	275/50R20	(MO)	109H	Mercedes GL / MLC	8.5	7.5 - 9.5	2271	44	11.4	31.1	11/32	40	600 A A
2354500	285/50R20	XL	116V		9	8.0 - 10.0	2756	50	11.9	31.5	10/32	41	600 A A
1953700	P245/45R20		99V	Land Rover Evoque	8	7.5 - 9.0	1709	51	9.6	28.7	11/32	30	600 A A
2423100	245/45R20	(LR)	99V	Land Rover LR3	8	7.5 - 9	1709	51	9.6	28.7	11/32	28	600 A A
1954300	265/45R20	XL (MO)	108H (e)	Mercedes ML Class / R Class	9	8.5 - 10.0	2205	50	10.6	29.0	11/32	33	520 A A
2204800	265/45R20	(NO)	104V	Porsche Macan	9	8.5 - 10.0	1984	51	10.5	29.4	11/32	31	520 A A
2011400	265/45R20	XL (MOE) Runflat	108H (e)	Mercedes ML Class	9	8.5 - 10.0	2205	50	10.7	29.5	11/32	37	520 A A
1939900	275/45R20	XL	110H	Volkswagen Touareg	9	8.5 - 10.5	2337	50	11.0	29.6	11/32	35	600 A A
1806100	275/45R20	XL (NO)	110V	Porsche Cayenne / S / Turbo	9	8.5 - 10.5	2337	50	11.0	29.6	11/32	35	520 A A
2299200	275/45R20	XL	110V	Volvo XC90	9	8.5 - 10.5	2337	50	10.7	29.8	11/32	34	600 A A
2034600	295/45ZR20	Runflat	110W (e)	Jeep Grand Cherokee SRT-8	10	9.5 - 11.0	2337	51	12.0	30.9	11/32	42	520 A A
2204700	295/40R20	(NO)	106V	Porsche Macan	10.5	10.0 - 11.5	2094	51	11.9	29.3	11/32	34	520 A A
<b>21" Rim</b>													
2220300	275/45R21	XL (LR)	110W	Land Rover Range Rover HSE	9	8.5 - 10.5	2337	50	10.9	30.8	10/32	38	520 A A
2166800	275/45R21	XL (LR)	110V	Land Rover Range Rover Sport	9	8.5 - 10.5	2337	50	10.9	30.8	10/32	37	520 A A
2390800	265/40R21	XL	105V	Ford Edge / Lincoln MKX	9.5	9 - 10.5	2039	50	10.7	29.3	12/32	34	600 A A
<b>22" Rim</b>													
2347700	285/45R22	XL	114H	Lincoln Navigator	9.5	9 - 10.5	2601	50	11.2	32.1	11/32	40	600 A A
<b>SCORPION VERDE</b>													
<b>18" Rim</b>													
2494300	235/60R18	(NO)	103W	Porsche Macan	7	6.5 - 8.5	1929	51	9.4	29.1	10/32	31	400 AA A
2494200	255/55R18	(NO)	105W	Porsche Macan	8	7 - 9	2039	51	10.4	29.0	10/32	32	400 AA A
2410700	235/50R18	(R01)	97Y	Audi Q3	7.5	6.5 - 8.5	1609	51	9.6	27.3	10/32	27	400 AA A
<b>19" Rim</b>													
2205400	235/55R19	(NO)	101Y	Porsche Macan	7.5	6.5 - 8.5	1819	51	9.6	29.2	11/32	32	400 AA A
2205300	255/50R19	(NO)	103Y	Porsche Macan	8	7 - 9	1929	51	10.4	29.1	10/32	33	400 AA A
2298100	255/50R19	XL (*) Runflat	107W	BMW X5 / X6	8	7 - 9	2149	50	10.4	29.1	10/32	41	400 AA A
2298000	285/45R19	(*) Runflat	111W	BMW X5/X6	9.5	9 - 10.5	2403	50	11.2	29.1	9/32	42	400 AA A
<b>20" Rim</b>													
1954200	265/45R20	(MO)	104Y (e)	Mercedes M Class	9	8.5 - 10.0	1984	51	10.6	29.5	11/32	33	400 AA A
2468500	275/45R20	XL	110W	Volkswagen Touareg	9	8.5 - 10.5	2337	50	10.7	29.8	10/32	34	400 AA A
<b>21" Rim</b>													
2298900	275/40R21	XL	107Y	Volkswagen Touareg	9.5	9 - 11	2149	50	10.9	29.6	10/32	33	400 AA A

# SCORPION VERDE™ ALL SEASON Plus



## CUV/SUV TOURING

### Quiet Comfort, Safety and Better Mileage

#### 1 HIGH MILEAGE

The optimized footprint provides balanced wear and the compound (polymer and silica) delivers improved mileage of up to 40%.

#### 2 ENERGY EFFICIENT

An optimized profile and innovative materials contribute to lower weight and provide up to a 20% improvement in rolling resistance. This results in reduced CO2 emissions and fuel consumption.

#### 3 REDUCED NOISE

Meets the rigorous demands of its drivers and provides a quieter, more comfortable ride. The OE derived pitch sequence and phasing contribute to lower noise levels.

#### 4 SAFETY IN ALL WEATHER CONDITIONS

Using the latest technology and innovation, it delivers high performance and exceptional handling in all weather conditions. The tread pattern has four longitudinal grooves and high lateral siping density that provide excellent water expulsion and greater lateral stability. The innovative tread compound and pattern result in strong capabilities in wet, dry and winter conditions.



- **65,000 mile limited treadwear warranty\***



## PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial Offer

Please visit [US.Pirelli.com](http://US.Pirelli.com) to learn more about the Pirelli Confidence Plus Plan



# SCORPION VERDE ALL SEASON PLUS

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION VERDE ALL SEASON PLUS</b>													
<b>16" Rim</b>													
2447200	235/70R16		106T		7	6 - 8	2094	44	9.4	29.0	11/32	31	740 A A
<b>17" Rim</b>													
2569800	245/70R17		110T		7	6.5 - 8.0	2337	44	9.8	30.7	11/32	38	740 A A
2448400	265/70R17		115T		8	7 - 9	2679	44	10.7	31.7	11/32	39	740 A A
2446100	225/65R17		102H		6.5	6 - 8	1874	44	9.0	28.5	11/32	30	740 A A
2447000	235/65R17		104H		7	6.5 - 8.5	1984	44	9.4	29.1	11/32	32	740 A A
2449000	245/65R17	XL	111H		7	7 - 8.5	2403	50	9.8	29.5	11/32	31	740 A A
2447900	255/60R17		106V		7.5	7 - 9	2094	51	10.2	29.1	11/32	34	740 A A
2569900	265/65R17		112T		8	7.5 - 9.5	2469	44	10.7	30.6	11/32	38	740 A A
<b>18" Rim</b>													
2620600	265/70R18		106H		8	7 - 9	2094	44	10.7	32.6	11/32	55	740 A A
2447100	235/65R18		106H		7	6.5 - 8.5	2094	44	9.4	30.0	11/32	33	740 A A
2507000	255/65R18		111T		7.5	7 - 9	2403	44	10.2	31.1	11/32	44	740 A A
2507100	265/65R18		114H		8	7.5 - 9.5	2601	44	10.7	31.5	11/32	49	740 A A
2570000	275/65R18		116T		8	7.5 - 9.5	2756	44	11.3	32.0	11/32	53	740 A A
2446700	235/60R18		103H		7	6.5 - 8.5	1929	44	9.4	29.1	11/32	34	740 A A
2446800	235/60R18	XL	107V		7	6.5 - 8.5	2149	50	9.4	29.1	11/32	34	740 A A
2489200	245/60R18		105H		7	7 - 8.5	2039	44	9.8	29.6	11/32	37	740 A A
2507200	265/60R18		110H		8	7.5 - 9.5	2337	44	10.7	30.5	11/32	44	740 A A
2507300	235/55R18		100T		7.5	6.5 - 8.5	1764	44	9.6	28.1	11/32	30	740 A A
2446400	235/55R18	XL	104V		7.5	6.5 - 8.5	1984	50	9.6	28.1	11/32	31	740 A A
2447700	255/55R18	XL	109H		8	7 - 9	2271	50	10.4	29.0	11/32	35	740 A A
2447800	255/55R18	XL	109V		8	7 - 9	2271	50	10.4	29.0	11/32	35	740 A A
<b>19" Rim</b>													
2448000	255/60R19		109H		7.5	7 - 9	2271	44	10.2	31.1	10/32	36	740 A A
2446500	235/55R19	XL	105V		7.5	6.5 - 8.5	2039	50	9.6	29.2	11/32	32	740 A A
2507400	245/55R19		103H		7.5	7 - 8.5	1929	44	10.0	29.6	11/32	35	740 A A
2507500	275/55R19		111V		8.5	7.5 - 9.5	2403	51	11.2	30.9	11/32	45	740 A A
2446200	235/50R19		99H		7.5	6.5 - 8.5	1709	44	9.6	28.3	10/32	28	740 A A
2446300	235/50R19		99V		7.5	6.5 - 8.5	1709	51	9.6	28.3	10/32	28	740 A A
2447400	255/50R19	XL	107H		8	7 - 9	2149	50	10.4	29.1	11/32	35	740 A A
2447500	255/50R19	XL	107V		8	7 - 9	2149	50	10.4	29.1	11/32	35	740 A A
2448200	265/50R19	XL	110V		8.5	7.5 - 9.5	2337	50	10.9	29.5	11/32	37	740 A A
<b>20" Rim</b>													
2570100	275/60R20		115H		8	7.5 - 9.5	2679	44	11.0	33.0	11/32	51	740 A A
2446600	235/55R20		102H		7.5	6.5 - 8.5	1874	44	9.6	30.2	10/32	33	740 A A
2507600	255/55R20	XL	110H		8	7 - 9	2337	50	10.4	31.0	11/32	40	740 A A
2570200	275/55R20		113H		8.5	7.5 - 9.5	2535	44	11.3	31.9	11/32	46	740 A A
2447600	255/50R20	XL	109H		8	7 - 9	2271	50	10.4	30.1	10/32	35	740 A A
2507700	255/50R20	XL	109V		8	7 - 9	2271	50	10.4	30.1	10/32	35	740 A A
2448300	265/50R20	XL	111V		8.5	7.5 - 9.5	2403	50	10.9	30.5	11/32	36	740 A A
2570300	265/50R20		107T		8.5	7.5 - 9.5	2149	44	10.9	30.5	11/32	38	740 A A
2448800	285/50R20	XL	116V		9	8 - 10	2756	50	11.7	31.3	10/32	41	740 A A
2448100	265/45R20	XL	108H		9	8.5 - 10	2205	50	10.5	29.4	11/32	33	740 A A
2448500	275/45R20	XL	110V		9	8.5 - 10.5	2337	50	10.7	29.8	11/32	36	740 A A
<b>22" Rim</b>													
2448600	275/50R22		111H		8.5	7.5 - 9.5	2403	44	11.2	32.9	10/32	44	740 A A
2448700	285/45R22	XL	114H		9.5	9 - 10.5	2601	50	11.2	32.1	10/32	40	740 A A



More miles per SUV.

**The new Scorpion Verde™ All Season Plus**

- Up to **40% better mileage\***
- **65,000 mile** limited treadwear warranty
- Quiet **comfort** and **safety**
- Improved **fuel efficiency**

See your **Pirelli Sales Representative**  
or visit **[US.Pirelli.com/NewScorpion](http://US.Pirelli.com/NewScorpion)**

\*From Pirelli internal testing



The new addition to the Scorpion family of SUV/CUV tires



# SCORPION™ STR™

## LIGHT TRUCK & SUV ALL SEASON

### 1 ALL SEASON PERFORMANCE

Silica and increased natural rubber compound.

### 2 COMFORTABLE DRIVING EXPERIENCE

Continuous central rib provides uniform treadwear with ride comfort and reduced noise on all road terrain.

### 3 GOOD HANDLING ON DIFFERING TERRAIN CONDITIONS

Inclined blocks combined with intensive siping design improve traction, handling, steering and brake response on differing terrain conditions.

- **65,000 mile limited treadwear warranty\***

(mileage warranty not valid for Original Equipment, LT sizes and Commercial use).

- Original Equipment: BMW, Ford, Land Rover, Lincoln, Volkswagen



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max Dual Load	PSI	Load Range	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION STR</b>															
<b>16" Rim</b>															
1666600	P255/70R16	RB	109H		7.5	6.5 - 8.5	2271		44		10.4	30.1	12/32	37	520 A A
1413600	P265/70R16	RB	112H		8	7.0 - 9.0	2469		44		10.9	30.7	12/32	46	520 A A
1394300	P215/65R16	RB	98H	Volkswagen Tiguan	6.5	6.0 - 7.5	1653		44		9.0	26.9	11/32	25	520 A A
1394500	P255/65R16	RB	109H	Land Rover Range Rover HSE	7.5	7.0 - 9.0	2271		44		10.3	29.1	12/32	34	520 A A
<b>17" Rim</b>															
1395100	P235/55R17	RB (*)	99H	BMW X3 / Toyota RAV4	7.5	6.5 - 8.5	1709		44		9.7	27.2	11/32	27	400 A A
<b>18" Rim</b>															
1625500	P255/70R18	RB (A)	112H	Ford Expedition / Lincoln Navigator	7.5	6.5 - 8.5	2469		44		10.3	32.2	12/32	36	520 A A
1570100	P255/70R18	RW (A)	112S	Ford Expedition / Lincoln Navigator	7.5	6.5 - 8.5	2469		44		10.1	32.2	12/32	37	520 A A
1578300	P275/60R18	RB	113H		8	7.5 - 9.5	2535		44		10.8	31.1	12/32	40	520 A A
1503700	P235/50R18	RB (*)	97H	BMW X3	7.5	6.5 - 8.5	1609		44		9.4	27.2	11/32	27	400 A A
<b>20" Rim</b>															
1555300	P275/55R20	RB	111H	Ford Expedition / Lincoln Navigator	8.5	7.5 - 9.5	2403		44		11.3	32.1	12/32	39	520 A A
1792400	P275/55R20	RW	111T	Ford F-150	8.5	7.5 - 9.5	2403		44		11.0	32.1	12/32	40	520 A A
1993600	P245/50R20	RB	102H	Ford Edge / Lincoln MKX	7.5	7.0 - 8.5	1874		44		9.9	29.6	12/32	32	520 A A
<b>SCORPION STR LIGHT TRUCK</b>															
<b>17" Rim</b>															
1475100	LT265/70R17	RB (A)	121S	Ford Excursion / F250 / F350	8	7.0 - 8.5	3197	2910	80 E		10.7	31.6	15/32	48	None



# SCORPION™ ATR™

## ALL TERRAIN – ALL SEASON

- 1 GREAT TRACTION ON UNEVEN TERRAIN**  
Wide and rugged shoulder blocks provide stability and improved lateral grip for braking efficiency and traction.
- 2 SELF-CLEANING GROOVES FOR CONTINUOUS TRACTION**  
Curved central grooves increases grip on irregular surfaces and clear mud and stones for ultimate performance.
- 3 STABLE AND COMFORTABLE ON ALL ROAD TERRAIN**  
Robust carcass and reinforced sidewall provide a high resistance to damage that handles even the hardest shocks.



- **50,000 mile limited treadwear warranty\***  
(mileage warranty not valid for Original Equipment, LT sizes and Commercial use).

### ORIGINAL EQUIPMENT








# SCORPION ATR

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max Dual Load	Max PSI	Load Range	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION ATR</b>															
<b>15" Rim</b>															
1616700	P235/75R15	XL RW	108T		6.5	6.0 - 8.0	2205		50		9.4	29.1	13/32	36	520 A B
1657400	205/70R15	RB	96T		6	5.0 - 7.0	1565		44		8.3	26.1	11/32	25	440 A B
<b>16" Rim</b>															
2530100	P225/70R16		101T		6.5	6 - 7.5	1819		44		9.0	28.4	13/32	34	520 A B
1731400	P235/70R16	RB	105T		7	6.0 - 8.0	2039		44		9.4	29.1	13/32	35	520 A B
2530200	P255/70R16		109T		7.5	6.5 - 8.5	2271		44		10.2	30.1	13/32	38	520 A B
2291700	P265/70R16		112T		8	7 - 9	2469		44		10.7	30.6	13/32	40	520 A B
2530300	P275/70R16		114T		8	7 - 9	2601		44		11.0	31.2	13/32	44	520 A B
<b>17" Rim</b>															
1932400	P245/70R17	RW	108T		7	6.5 - 8.0	2205		44		9.8	30.7	12/32	38	520 A A
1616300	P265/70R17	RW	113T		8	7.0 - 9.0	2535		44		10.8	31.5	13/32	45	520 A B
1864100	P245/65R17	XL RB	111T		7	7.0 - 8.5	2403		50		9.6	29.6	13/32	38	520 A B
1727300	P255/65R17	RB	110T		7.5	7.0 - 9.0	2337		44		10.2	30.0	14/32	41	520 A B
2259900	P265/65R17		112T		8	7.5 - 9.5	2469		44		10.7	30.6	13/32	40	520 A B
<b>18" Rim</b>															
2053700	P255/70R18		113T		7.5	6.5 - 8.5	2535		44		10.2	32.1	13/32	43	520 A B
1831400	P275/65R18	RW	116H		8	7.5 - 9.5	2756		44		11.3	32.0	14/32	46	520 A B
1718100	P255/60R18	XL RB	112H		7.5	7.0 - 9.0	2469		50		10.1	30.3	12/32	38	520 A B
1831200	P265/60R18	RW	110H	Jeep Grand Cherokee	8	7.5 - 9.5	2337		44		10.6	30.5	13/32	39	520 A B
<b>20" Rim</b>															
1852000	P275/55R20	RW	111S	Ford F-150	8.5	7.5 - 9.5	2403		44		11.3	31.9	13/32	43	520 A B
2248200	P275/55R20	RB	111S		8.5	7.5 - 9.5	2403		44		11.3	31.9	13/32	40	520 A B
<b>SCORPION ATR FLOTATION / LIGHT TRUCK</b>															
<b>15" Rim</b>															
1582500	31X10.50R15LT	RW	109S		8.5	7.0 - 9.0	2271		44 C		10.5	30.6	16/32	44	520 A B
1681900	LT235/75R15	RB	110S		6.5	6.0 - 7.0	2337	2149	65 D		9.6	29.1	16/32	35	None
<b>16" Rim</b>															
1617100	LT235/85R16	RW	120R		6.5	6.0 - 7.5	3086	2756	80 E		9.5	31.7	16/32	47	None
1617500	LT225/75R16	RB	110S		6	6.0 - 7.0	2337	2149	65 D		9.1	29.5	16/32	39	None
1617300	LT245/75R16	RB	120R		7	6.5 - 8.0	3086	2756	80 E		9.9	30.5	16/32	46	None
1555400	LT265/75R16	RW	123S		7.5	7.0 - 8.0	3417	3086	80 E		10.6	31.6	16/32	52	None
1523100	LT285/75R16	RW	122R		8	7.5 - 9.0	3307	2998	65 D		11.3	32.8	16/32	53	None
<b>17" Rim</b>															
1616000	LT235/80R17	RW	120R		6.5	6.0 - 7.5	3086	2833	80 E		9.3	31.8	16/32	48	None
1616200	LT245/70R17	RB	119R		7	6.5 - 8.0	2998	2756	80 E		9.9	30.4	16/32	46	None
1617000	LT265/70R17	RW	121S		8	7.0 - 8.5	3197	2910	80 E		10.6	31.6	16/32	51	None
1616900	LT285/70R17	RW	121R		8.5	7.5 - 9.0	3197	2910	65 D		11.2	32.7	16/32	55	None
<b>20" Rim</b>															
1577500	LT325/60R20	RB	121S		9.5	9.0 - 12.0	3197	2910	44 D		12.8	35.4	16/32	63	None
<b>22" Rim</b>															
1577400	*** LT325/55R22	RB	120S		10	9.0 - 12.0	3086	2833	44 D		12.9	36.1	16/32	66	None
<b>24" Rim</b>															
1577300	LT325/45R24	RB	120S		11	9.0 - 12.0	3086	2833	65 E		12.3	35.6	16/32	62	None

# ***WINTER***

Pirelli's large tire selection offers superior safety and optimum winter driving performance for any application. Winter tires are formulated with specific compounds and optimized tread patterns to ensure adherence and traction in cold weather conditions. Using Pirelli winter tires during the winter season greatly improves traction, safety and braking distances at low temperatures in rain, ice and snow. Running the right Pirelli tire during the right season allows for the ultimate experience in premium performance.

# WINTER

TIRE	DRY	WET	SNOW	WEAR LIFE	DESCRIPTION
 <p><b>WINTER SOTTOZERO 3</b></p>					The result of development with the world's top vehicle manufacturers the Sottozero 3 is built to handle the demands of today's modern vehicles in order to achieve maximum safety, control and performance in all weather conditions.
 <p><b>WINTER SOTTOZERO Snow II</b></p>					An innovative tire for sports cars and medium to high powered sedans that offers excellent driving safety in cold weather road conditions. For demanding drivers it guarantees excellent performance on dry roads, in the wet and in the presence of snow.
 <p><b>SCORPION WINTER</b></p>					The ultimate winter safety accessory for the modern SUV or CUV. The Scorpion Winter provides safety by guaranteeing maximum stability and control in snow, wet and dry conditions.

**LEGEND PERFORMANCE:**



# WINTER SOTTOZERO 3

## ULTRA HIGH PERFORMANCE

The Result of The Development With  
the Prestige & Premium OEMs

### SNOW PERFORMANCE

- 1 Directional double arrow pattern design increases the number of blocks.
- 2 High sipe density increases snow capture.

### WET PERFORMANCE

Wide grooves improve water expulsion.

### DRY PERFORMANCE

3D sipe technology enhances tread pattern stability optimising the footprint granting more grip with less treadwear.



- Available in Run Flat Technology (See Road Hazard Warranty).





# WINTER SOTTOZERO 3

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>WINTER SOTTOZERO 3</b>													
<b>16" Rim</b>													
2350900	215/65R16		98H		6.5	6.0 - 7.5	1653	44	9.0	26.9	10/32	26	None
2529200	205/60R16	XL	96H	Volvo V60 / S60	6	5.5 - 7.5	1565	50	8.2	25.7	10/32	21	None
2445000	215/60R16	s-i	95H	Volkswagen Passat	6.5	6 - 7.5	1521	44	8.7	26.1	10/32	26	None
2350800	215/60R16	XL	99H		6.5	6 - 7.5	1709	50	8.7	26.1	10/32	23	None
2192200	215/55R16		93H		7	6.0 - 7.5	1433	44	9.1	25.5	10/32	20	None
2192300	215/55R16	XL	97H		7	6.0 - 7.5	1609	50	9.1	25.5	10/32	20	None
2352500	225/55R16	XL	99V		7	6 - 8	1709	50	9.2	25.7	10/32	25	None
<b>17" Rim</b>													
2563900	205/55R17	XL (J)	95H	Jaguar XE	6.5	5.5 - 7.5	1521	50	8.4	25.9	10/32	22	None
2445100	215/55R17	s-i	94H	Volkswagen Passat	7	6 - 7.5	1477	44	8.9	26.3	10/32	24	None
2364400	215/55R17	XL	98H		7	6 - 7.5	1653	50	8.9	26.3	10/32	24	None
2350700	215/55R17	XL	98V		7	6 - 7.5	1653	50	8.9	26.3	10/32	24	None
2351500	225/55R17	XL	101V		7	6.0 - 8.0	1819	50	9.3	26.9	10/32	26	None
2351400	225/55R17		97H		7	6.0 - 8.0	1609	44	9.3	26.9	10/32	26	None
2352000	235/55R17	XL	103V		7.5	6.5 - 8.5	1929	50	9.6	27.2	10/32	27	None
2352600	235/55R17		99H		7.5	6.5 - 8.5	1709	44	9.6	27.2	10/32	27	None
2413700	245/55R17	Runflat	102H		7.5	7 - 8.5	1874	44	10.0	27.6	10/32	36	None
2458000	205/50R17	XL s-i	93H		6.5	5.5 - 7.5	1433	50	8.4	25.1	10/32	21	None
2350400	205/50R17	XL	93V		6.5	5.5 - 7.5	1433	50	8.4	25.1	10/32	22	None
2350500	215/50R17	XL	95H		7	6.0 - 7.5	1521	50	9.1	25.7	10/32	22	None
2350600	215/50R17	XL	95V		7	6.0 - 7.5	1521	50	9.1	25.7	10/32	22	None
2201800	225/50R17		94H		7	6.0 - 8.0	1477	44	9.2	25.9	10/32	23	None
2192000	225/50R17	XL	98H		7	6.0 - 8.0	1653	50	9.2	25.9	10/32	23	None
2563800	225/50R17	XL (J)	98H	Jaguar XE	7	6 - 8	1653	50	9.2	25.9	10/32	22	None
2192400	225/50R17	XL	98V		7	6.0 - 8.0	1653	50	9.2	25.9	10/32	23	None
2518100	205/45R17	XL	88H		7	6.5 - 7.5	1235	50	8.1	24.3	10/32	16	None
2375400	205/45R17	XL Runflat	88V		7	6.5 - 7.5	1235	50	8.1	24.3	10/32	22	None
2413100	205/45R17	XL	88V		7	6.5 - 7.5	1235	50	8.1	24.3	10/32	16	None
2201900	225/45R17		91H		7.5	7 - 8.5	1356	44	8.9	25.0	10/32	20	None
2352700	225/45R17	Runflat	91H		7.5	7.0 - 8.5	1356	44	9.0	25.1	10/32	25	None
2192100	225/45R17	XL	94H		7.5	7 - 8.5	1477	50	8.9	25.0	10/32	20	None
2202000	225/45R17	XL	94V		7.5	7 - 8.5	1477	50	8.9	25.0	10/32	20	None
2352800	225/45R17	XL Runflat	94V		7.5	7.0 - 8.5	1477	50	9.0	25.1	10/32	24	None
2351800	235/45R17	XL	97H		8	7.5 - 9.0	1609	50	9.3	25.4	10/32	23	None
2351900	235/45R17	XL	97V		8	7.5 - 9.0	1609	50	9.3	25.4	10/32	23	None
2352200	245/45R17	XL	99V		8	7.5 - 9	1709	50	9.6	25.7	10/32	24	None
2413600	245/40R17	XL	95V		8.5	8 - 9.5	1521	50	9.8	24.7	10/32	23	None
<b>18" Rim</b>													
2434900	215/55R18		95H		7	6 - 7.5	1521	44	8.9	27.3	10/32	25	None
2428000	215/55R18	XL (MO)	99V	Mercedes GLA Class	7	6 - 7.5	1709	50	8.9	27.3	10/32	25	None
2375500	225/50R18	Runflat	95H		7	6 - 8	1521	44	9.2	26.9	10/32	29	None
2393600	225/50R18	XL (AO)	99H	Audi Q3	7	6.0 - 8.0	1709	50	9.4	27.1	10/32	24	None
2564700	235/50R18	XL (MGT)	101V	Maserati Ghibli / Quattroporte	7.5	6.5 - 8.5	1819	50	9.6	27.3	10/32	27	None
2364500	245/50R18		100V		7.5	7 - 8.5	1764	51	10.0	27.7	10/32	27	None
2563700	225/45R18	XL (J)	95H	Jaguar XE	7.5	7 - 8.5	1521	50	8.9	25.9	10/32	24	None
2351100	225/45R18	XL	95V		7.5	7.0 - 8.5	1521	50	8.9	25.9	10/32	24	None
2352300	245/45R18	XL	100V		8	7.5 - 9	1764	50	9.6	26.7	10/32	26	None
2513400	245/45R18	XL (J)	100V	Jaguar F-Type (F)	8	7.5 - 9	1764	50	9.6	26.7	10/32	25	None
2564800	275/45R18	XL (MGT)	107V	Maserati Ghibli / Quattroporte	9	8.5 - 10.5	2149	50	10.7	27.8	10/32	31	None
2413000	205/40R18	XL	86V		7.5	7 - 8	1168	50	8.3	24.4	10/32	19	None
2517100	205/40R18	XL Runflat	86V		7.5	7 - 8	1168	50	8.5	24.5	10/32	18	None
2554100	225/40R18	XL	92H	Volkswagen Golf	8	7.5 - 9	1389	50	9.1	25.1	10/32	23	None
2351000	225/40R18	XL	92V		8	7.5 - 9	1389	50	9.1	25.1	10/32	21	None
2414400	225/40R18	XL (AO)	92V	Audi A3	8	7.5 - 9	1389	50	9.1	25.1	10/32	23	None
2351700	235/40R18	XL	95V		8.5	8 - 9.5	1521	50	9.5	25.4	10/32	22	None
2398000	235/40R18	XL (MO)	95V	Mercedes SLK AMG / C Class AMG / CLA AMG / A Class AMG	8.5	8 - 9.5	1521	50	9.5	25.4	10/32	20	None
2563500	245/40R18	XL (J)	97H	Jaguar XE	8.5	8 - 9.5	1609	50	9.8	25.7	10/32	25	None
2352100	245/40R18	XL	97V		8.5	8.0 - 9.5	1609	50	9.8	25.8	10/32	24	None
2424700	245/40R18	XL runflat	97V		8.5	8 - 9.5	1609	50	9.8	25.7	10/32	30	None
2397400	275/40R18	XL (J)	103V	Jaguar F-Type (R)	9.5	9 - 11	1929	50	10.9	26.7	10/32	28	None
2397900	255/35R18	XL (MO)	94V	Mercedes SLK AMG	9	8.5 - 10	1477	50	10.2	25.0	10/32	23	None

# WINTER SOTTOZERO 3

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>WINTER SOTTOZERO 3</b>													
<b>19" Rim</b>													
2392900	225/45R19	XL runflat	96V		7.5	7 - 8.5	1565	50	8.9	27.0	10/32	30	None
2516900	225/45R19	XL	96V		7.5	7 - 8.5	1565	50	8.9	27.0	10/32	23	None
2428100	235/45R19	XL (MO)	99V	Mercedes GLA Class	8	7.5 - 9	1709	50	9.3	27.4	10/32	26	None
2463200	245/45R19	XL (MO)	102V	Mercedes S Class	8	7.5 - 9	1874	50	9.6	27.7	10/32	26	None
2424000	245/45R19	XL	102W		8	7.5 - 9	1874	50	9.6	27.7	10/32	28	None
2569500	245/45R19	(MGT)	98W	Maserati Ghibli / Quattroporte	8	7.5 - 9	1653	51	9.6	27.7	10/32	27	None
2424400	255/45R19	XL (MO)	104V	Mercedes S Class AMG	8.5	8 - 9.5	1984	50	10.0	28.1	10/32	27	None
2530600	225/40R19	XL runflat	93H		8	7.5 - 9	1433	50	9.1	26.1	10/32	23	None
2563600	225/40R19	XL (J)	93H	Jaguar XE	8	7.5 - 9	1433	50	9.1	26.1	10/32	23	None
2397600	245/40R19	(J)	94V	Jaguar F-Type (F)	8.5	8 - 9.5	1477	51	9.8	26.7	10/32	24	None
2377000	255/40R19	XL	100V	Audi Q3	9	8.5 - 10	1764	50	10.2	27.0	10/32	26	None
2393000	255/40R19	Runflat	96V		9	8.5 - 10	1565	51	10.2	27.0	10/32	32	None
2569600	275/40R19	(MGT)	101W	Maserati Ghibli / Quattroporte	9.5	9 - 11	1819	51	10.9	27.7	10/32	30	None
2553200	235/35R19	XL (R01)	91V	Audi Quattro RS3	8.5	8 - 9.5	1356	50	9.5	25.5	10/32	24	None
2404500	235/35R19	XL	91W	McLaren MP4-12C / Spider / P1	8.5	8 - 9.5	1356	50	9.5	25.5	10/32	20	None
2530700	245/35R19	XL runflat	93H		8.5	8 - 9.5	1433	50	9.8	25.8	10/32	24	None
2499400	245/35R19	XL (L)	93W	Lamborghini Huracan	8.5	8 - 9.5	1433	50	9.8	25.8	10/32	23	None
2564000	255/35R19	XL (J)	96H	Jaguar XE	9	8.5 - 10	1565	50	10.2	26.0	10/32	24	None
2397500	275/35R19	(J)	96V	Jaguar F-Type (R)	9.5	9 - 11	1565	51	10.9	26.6	10/32	26	None
2551900	305/35R19	(L)	102W	Lamborghini Huracan	11	10 - 12	1874	51	12.3	27.4	10/32	30	None
<b>20" Rim</b>													
2371200	245/40R20	XL	99W	Maserati Quattroporte / Ghibli	8.5	8 - 9.5	1709	50	9.8	27.7	10/32	27	None
2370800	255/40R20	XL (MO)	101V	Mercedes S Class AMG	9	8.5 - 10	1819	50	10.2	28.0	10/32	27	None
2416300	255/35R20	XL	97V	BMW 5 Series	9	8.5 - 10	1609	50	10.2	27.0	10/32	26	None
2495200	255/35R20	XL (J)	97V	Jaguar F-Type (F)	9	8.5 - 10	1609	50	10.2	27.0	10/32	22	None
2371300	285/35R20		100W	Maserati Quattroporte / Ghibli	10	9.5 - 11	1764	51	11.4	27.9	10/32	33	None
2310900	285/35R20	XL	104V	Mercedes S Class AMG	10	9.5 - 11	1984	50	11.4	27.9	10/32	28	None
2309900	245/30R20	XL (L)	90W	Lamborghini Gallardo LP724	8.5	8 - 9	1323	50	9.8	25.8	10/32	22	None
2413200	265/30R20	XL	94W		9.5	9 - 10	1477	50	10.7	26.3	10/32	26	None
2495300	285/30R20	XL (J)	99V	Jaguar F-Type (R)	10	9.5 - 10.5	1709	50	11.4	26.8	10/32	24	None
2310000	305/30R20	XL (L)	103W	Lamborghini Gallardo LP724 / McLaren MP4-12C / Spider / P1	11	10.5 - 11.5	1929	50	12.3	27.2	10/32	29	None
<b>21" Rim</b>													
2414200	245/35R21	XL	96W	Maserati Quattroporte	8.5	8 - 9.5	1565	50	9.8	27.8	10/32	25	None
2405200	275/35R21	XL	103W		9.5	9 - 11	1929	50	10.9	28.5	10/32	30	None
2413400	285/30R21	XL	100W	Maserati Quattroporte	10	9.5 - 10.5	1764	50	11.4	27.8	10/32	30	None
2428400	285/30R21	XL (R01)ncs	100W		10	9.5 - 10.5	1764	50	11.4	27.8	10/32	31	None





# WINTER

## Sottozero Serie II

### ULTRA HIGH PERFORMANCE

**1 OVERALL WINTER PERFORMANCE**

Patented sipe construction technology increases contact area and tire rigidity even on irregular roads improving grip, stability and braking performance.

**2 SNOW TRACTION**

Inclined internal grooves increase lateral grip and reduce noise.

**3 SAFETY IN WET AND DRY CONDITIONS**

Longitudinal external grooves reduce aquaplaning while two central ribs increase tire rigidity to enhance handling in dry conditions.



- Available in Run Flat Technology (See Road Hazard Warranty).





# WINTER SOTTOZERO SERIE II

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W210 SOTTOZERO SERIE II</b>													
<b>16" Rim</b>													
2075400	215/65R16	(AO)	98H	Audi Q3	6.5	6.0 - 7.5	1653	44	8.9	27.2	11/32	24	None
2072900	205/60R16	(AO)(MO)	92H	Audi A4 / Mercedes E Class	6	5.5 - 7.5	1389	44	8.2	25.7	11/32	21	None
2001600	225/60R16	(AO)	98H	Audi A6	6.5	6.0 - 8.0	1653	44	9.2	26.8	11/32	24	None
1952100	205/55R16	(*)(MO)	91H	BMW 3 Series / 1 Series / SLK / C Class	6.5	5.5 - 7.5	1356	44	8.6	25.1	11/32	22	None
2008900	205/55R16	Runflat	91H		6.5	5.5 - 7.5	1356	44	8.6	25.1	11/32	25	None
2073000	225/55R16	(AO)(MO)	95H	Audi A4 / Mercedes E Class	7	6.0 - 8.0	1521	44	9.2	25.9	11/32	22	None
2155400	225/55R16	(*)	95H	BMW 3 Series	7	6.0 - 8.0	1521	44	9.2	25.9	11/32	24	None
2414100	225/55R16	Runflat	95H	Mercedes C-Class	7	6 - 8	1521	44	9.2	25.7	11/32	27	None
1939400	215/45R16		86H		7	7.0 - 8.0	1168	44	8.6	25.9	11/32	20	None
<b>17" Rim</b>													
2157800	205/65R17	(*)	96H	BMW X3	6	5.5 - 7.5	1565	44	8.4	27.7	11/32	25	None
1951900	225/65R17	(AO)	102H	Audi Q5	6.5	6.0 - 8.0	1874	44	9.2	28.7	11/32	29	None
2075500	215/60R17	(AO)	96H	Audi Q3	6.5	6.0 - 7.5	1565	44	9.2	26.4	11/32	25	None
2001400	225/60R17	(*)	99H	BMW X3	6.5	6.0 - 8.0	1709	44	9.1	26.8	11/32	29	None
2281900	225/60R17	(*) Runflat	99H	BMW X3	6.5	6.0 - 8.0	1709	44	9.1	26.8	10/32	36	None
1885400	235/60R17	(AO)	102H	Audi A8	7	6.5 - 8.5	1874	44	9.6	28.3	11/32	28	None
2160000	205/55R17	(*)	91H	Mini Cooper Countryman / Paceman	6.5	5.5 - 7.5	1356	44	8.6	25.9	11/32	22	None
2281800	205/55R17	(*) Runflat	91H	Mini Paceman / Countryman	6.5	5.5 - 7.5	1356	44	8.6	25.9	11/32	27	None
1975800	205/55R17	XL	95H		6.5	5.5 - 7.5	1521	50	8.4	25.9	11/32	23	None
2049200	225/55R17	(*)	97H	BMW 5 Series / 3 Series GT	7	6.0 - 8.0	1609	44	9.4	27.0	11/32	25	None
2051800	225/55R17	(AO)	97H	Audi A4 Allroad	7	6.0 - 8.0	1609	44	9.4	27.0	11/32	25	None
2159900	225/55R17	(*) Runflat	97H	BMW 5 Series / 3 Series GT	7	6.0 - 8.0	1609	44	9.4	27.0	11/32	30	None
2001500	235/55R17	(AO)	99H	Audi A7	7.5	6.5 - 8.5	1709	44	9.8	27.4	11/32	24	None
1919800	205/50R17	XL (MOE) Runflat	93H	Mercedes CLA / B Class / A Class	6.5	5.5 - 7.5	1433	50	8.6	25.3	11/32	23	None
1957200	205/50R17	XL (MO)	93H	Mercedes CLA / B Class / A Class	6.5	5.5 - 7.5	1433	50	8.6	25.3	11/32	19	None
1877000	225/50R17	Runflat(*)	94H	BMW 5 Series / 4 Series / 3 Series / X1	7	6.0 - 8.0	1477	44	9.4	26.1	11/32	28	None
1954700	225/50R17	(*)	94H	BMW 4 Series / 3 Series / X1	7	6.0 - 8.0	1477	44	9.4	26.1	11/32	23	None
1813300	215/45R17	XL	91H		7	7.0 - 8.0	1356	50	8.6	24.9	11/32	22	None
2056900	225/45R17	(MO)	91H	Mercedes SLK / C Class	7.5	7.0 - 8.5	1356	44	9.0	25.1	11/32	20	None
1817400	245/45R17	XL (MO)	99H	Mercedes SL / E Class	8	7.5 - 9.0	1709	50	9.8	25.8	11/32	25	None
1962100	215/40R17	XL	87H		7.5	7.0 - 8.5	1201	50	8.5	23.9	11/32	19	None
<b>18" Rim</b>													
1885500	235/55R18	XL (AO)	104H	Audi A8	7.5	6.5 - 8.5	1984	50	9.8	28.3	11/32	29	None
2008800	225/50R18	XL (AO)	99H	Audi A6	7	6.0 - 8.0	1709	50	9.4	27.1	11/32	24	None
2282000	245/50R18	(*) Runflat	100H	BMW 7 Series / BMW 5 Series GT / BMW X3	7.5	7.0 - 8.5	1764	44	9.7	27.8	10/32	35	None
2281700	225/45R18	(*) Runflat	91H	BMW X1	7.5	7.0 - 8.5	1356	44	9.1	26.1	10/32	25	None
2414000	225/45R18	XL (MOE) Runflat	95H	Mercedes C-Class	7.5	7.0 - 8.5	1521	50	8.9	25.9	10/32	25	None
1817600	245/40R18	XL (MO)	97H	Mercedes E Class	8.5	8.0 - 9.5	1609	50	10.0	25.9	11/32	25	None
1935200	255/40R18	Runflat	95H (e)		9	8.5 - 10.0	1521	44	10.4	26.2	10/32	29	None
<b>19" Rim</b>													
1817700	235/50R19	XL (AO)	103H	Audi A8	7.5	6.5 - 8.5	1929	50	9.8	28.5	11/32	28	None
1928500	235/50R19	(MO)	99H	Mercedes GLK	7.5	6.5 - 8.5	1709	44	9.8	28.5	11/32	28	None
1935400	255/35R19	Runflat	92H (e)		9	8.5 - 10.0	1389	44	10.4	26.2	10/32	26	None
<b>W240 SOTTOZERO SERIE II</b>													
<b>16" Rim</b>													
2027800	205/55R16	XL (N1)	94V	Porsche 914 / 924 / 928 / 944 / 911 / 912 / 964 / Boxster	6.5	5.5 - 7.5	1477	50	8.6	25.1	11/32	20	None
2023600	225/50R16	XL (N1)	96V	Porsche 914 / 924 / 928 / 944 / 911 / 912 / 964 / Boxster	7	6.0 - 8.0	1565	50	9.4	25.1	11/32	22	None
<b>17" Rim</b>													
1822400	205/55R17	(NO)	91V	Porsche Boxster	6.5	5.5 - 7.5	1356	51	8.6	26.1	10/32	22	None
1971400	225/55R17	XL (MO)	101V	Mercedes Viano	7	6.0 - 8.0	1819	50	9.4	27.0	11/32	26	None
2157300	245/55R17	(MO)	102V	Mercedes S Class	7.5	7.0 - 8.5	1874	51	10.2	27.8	11/32	26	None
1822500	235/50R17	(NO)	96V	Porsche Boxster	7.5	6.5 - 8.5	1565	51	9.8	26.5	10/32	27	None
1813400	215/45R17	XL	91V		7	7.0 - 8.0	1356	50	8.6	24.8	11/32	22	None
<b>18" Rim</b>													
1840900	245/50R18	(NO)	100V	Porsche Panamera	7.5	7.0 - 8.5	1764	51	10.4	27.8	10/32	28	None
2285200	215/45R18	XL (MO)	93V	Mercedes CLA AMG / A Class AMG	7	7.0 - 8.0	1433	50	8.6	25.8	11/32	22	None
2354900	225/45R18	XL (*) Runflat	95V	BMW 3 Series / 4 Series	7.5	7.0 - 8.5	1521	50	9.1	26.1	11/32	26	None
1864600	235/45R18	(NO)	94V	Porsche Boxster	8	7.5 - 9.0	1477	51	9.5	26.5	11/32	23	None
1962300	235/45R18	XL	98V		8	7.5 - 9.0	1653	50	9.5	26.5	11/32	24	None
2093900	245/45R18	XL Runflat(*)	100V (e)	BMW 5 Series	8	7.5 - 9.0	1764	50	9.6	25.8	11/32	30	None
1864800	265/45R18	(NO)	101V	Porsche Boxster	9	8.5 - 10.0	1819	51	10.7	27.6	11/32	30	None

# WINTER SOTTOZERO SERIE II

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W240 SOTTOZERO SERIE II</b>													
<b>18" Rim (cont'd)</b>													
1841000	275/45R18	(N0)	103V	Porsche Panamera	9	8.5 - 10.5	1929	51	11.0	28.0	11/32	28	None
1842200	215/40R18	XL Runflat	89V (e)		7.5	7.0 - 8.5	1279	50	8.5	24.9	11/32	24	None
2135900	225/40R18	XL Runflat(*)	92V (e)	BMW 1 Series	8	7.5 - 9.0	1389	50	9.2	25.2	11/32	24	None
1821900	235/40R18	(N1)	91V	Porsche 911 Carrera/S / Boxster	8.5	8.0 - 9.5	1356	51	9.7	25.6	11/32	22	None
1850000	235/40R18	(N2)	91V	Porsche 911 Carrera/S/4/4S / 911 Turbo	8.5	8.0 - 9.5	1356	51	9.7	25.6	11/32	22	None
1863000	235/40R18	XL (M0)	95V	Mercedes C-Class	8.5	8 - 9.5	1521	50	9.5	25.4	11/32	22	None
1822000	255/40R18	(N1)	95V	Porsche Boxster	9	8.5 - 10.0	1521	51	10.4	26.2	10/32	25	None
1865500	255/40R18	XL (M0)	99V	Mercedes SL / E Class AMG	9	8.5 - 10.0	1709	50	10.4	26.2	10/32	27	None
1822100	265/40R18	(N1)	97V	Ferrari F355 / 348 / Porsche 911 Carrera/S	9.5	9.0 - 10.5	1609	51	10.9	26.5	10/32	26	None
2051600	275/40R18	XL Runflat	103V (e)		9.5	9.0 - 11.0	1929	50	11.2	26.8	10/32	29	None
1842300	245/35R18	XL Runflat	92V (e)		8.5	8.0 - 9.5	1389	50	10.0	24.9	11/32	22	None
1859000	255/35R18	XL Runflat	94V (e)		9	8.5 - 10.0	1477	50	10.4	25.2	10/32	27	None
1850200	295/35R18	(N2)	99V	Porsche 911 Carrera/S/4/4S / 911 Turbo	10.5	10.0 - 11.5	1709	51	12.2	26.0	10/32	28	None
<b>19" Rim</b>													
2181800	235/50R19	XL	103V		7.5	6.5 - 8.5	1929	50	9.8	28.5	11/32	28	None
1877500	245/45R19	XL	102V	Jaguar XJ	8	7.5 - 9.0	1874	50	9.8	27.8	10/32	28	None
2157500	245/45R19	XL (MOE) Runflat	102V	Mercedes S Class	8	7.5 - 9	1874	50	9.6	27.7	10/32	31	None
2049900	245/45R19	XL Runflat(*)	102V (e)	BMW 7 Series / 5 Series GT /BMW X3	8	7.5 - 9.0	1874	50	9.8	27.8	10/32	33	None
2391000	255/45R19	(N0)	100V	Porsche Panamera	8.5	8 - 9.5	1764	51	10.0	28.1	10/32	29	None
1864500	235/40R19	(N0)	92V	Porsche 911 Carrera/S/4/4S	8.5	8.0 - 9.5	1389	51	9.7	26.6	11/32	24	None
2365300	245/40R19	XL Runflat	98V (e)		8.5	8 - 9.5	1653	50	9.8	26.7	10/32	29	None
2012000	255/40R19	XL (*)	100V	BMW 6 Series M6 / 5 Series M5	9	8.5 - 10.0	1764	50	10.4	27.2	12/32	27	None
1863200	275/40R19	XL (M0)	105V	Mercedes S Class AMG	9.5	9.0 - 11.0	2039	50	11.2	27.8	10/32	29	None
1877600	275/40R19	XL	105V	Jaguar XJ	9.5	9.0 - 11.0	2039	50	11.2	27.8	10/32	29	None
2155500	275/40R19	XL Runflat(*)	105V (e)	BMW 7 Series / 5 SERIES GT / X3	9.5	9.0 - 11.0	2039	50	11.2	27.8	11/32	36	None
2391100	285/40R19	(N0)	103V	Porsche Panamera	10	9.5 - 11	1929	51	11.4	28.0	10/32	28	None
1821800	235/35R19	(N1)	87V	Mclaren MP4-12C / Spider / Porsche 911 Carrera/S/4/4S / 911 Turbo	8.5	8.0 - 9.5	1201	51	9.7	25.6	10/32	22	None
1857700	235/35R19	XL (L)	91V	LAMBORGHINI GALLARDO LP550-2 Balboni /LAMBORGHINI GALLARDO LP560-4 /LAMBORGHINI GALLARDO LP570-4 Superleggera /LAMBORGHINI GALLARDO LP570-4 Supertrofeo Stradale /LAMBORGHINI GALLARDO Superleggera / LAMBORGHINI GALLARDO (blank)	8.5	8.0 - 9.5	1356	50	9.7	25.6	10/32	22	None
1863100	255/35R19	XL (M0)	96V	Mercedes SL AMG / CLS AMG / E Class AMG / C Class AMG / Black Series	9	8.5 - 10.0	1565	50	10.4	26.2	10/32	27	None
2365200	275/35R19	XL Runflat	100V (e)		9.5	9 - 11	1764	50	10.9	26.6	10/32	31	None
1931600	285/35R19	(N0)	99V	Porsche 911 Carrera/S/4/4S	10	9.5 - 11.0	1709	51	11.7	27.0	10/32	29	None
1864400	295/35R19	(N0)	100V	Porsche 911 Carrera/S/4/4S	10.5	10.0 - 11.5	1764	51	12.1	27.3	10/32	29	None
2265500	245/30R19	XL Runflat	89V (e)		8.5	8 - 9	1279	50	9.8	24.8	10/32	24	None
1898400	285/30R19	XL (M0)	98V	Mercedes SL AMG / CLS AMG / E Class AMG / C Class AMG/ Black Series	10	9.5 - 10.5	1653	50	11.7	25.9	10/32	26	None
1822200	295/30R19	XL (N1)	100V	Porsche 911 Carrera/S/4/4S / 911 Turbo	10.5	10.0 - 11.0	1764	50	12.1	26.2	10/32	29	None
1962000	295/30R19	XL (L)	100V	Lamborghini Gallardo / LP550-2 Balboni / LP560-4 / LP570-4 Superleggera /Supertrofeo Stradale	10.5	10.0 - 11.0	1764	50	12.1	26.2	10/32	28	None
<b>20" Rim</b>													
1877800	245/40R20	XL	99V	Jaguar XJ	8.5	8.0 - 9.5	1709	50	10.0	27.9	11/32	25	None
1848900	255/40R20	XL (N0)	101V	Porsche Panamera	9	8.5 - 10.0	1819	50	10.4	28.2	10/32	28	None
2145900	255/40R20	XL (A0)	101V	Audi A6 Allroad	9	8.5 - 10.0	1819	50	10.4	28.2	11/32	29	None
2391200	255/40R20	XL (N1)	101V	Porsche Panamera	9	8.5 - 10	1819	50	10.2	28.0	10/32	28	None
2209700	265/40R20	XL	104V		9.5	9.0 - 10.5	1984	50	10.9	28.5	11/32	32	None
2266000	225/35R20	XL Runflat	90V (e)		8	7.5 - 9	1323	50	9.1	26.2	10/32	28	None
1864700	245/35R20	(N0)	91V	Porsche 911 Carrera/S/4/4S	8.5	8.0 - 9.5	1356	51	10.0	26.9	10/32	24	None
2265800	245/35R20	XL Runflat	95V (e)		8.5	8 - 9.5	1521	50	9.8	26.8	10/32	33	None
2313600	265/35R20	XL	99V		9.5	9.0 - 10.5	1709	50	10.4	27.3	11/32	30	None
1877700	275/35R20	XL	102V	Jaguar XJ	9.5	9.0 - 11.0	1874	50	11.2	27.7	10/32	28	None
1848800	285/35R20	XL (N0)	104V	Porsche Panamera	10	9.5 - 11.0	1984	50	11.7	28.0	10/32	30	None
2391300	285/35R20	XL (N1)	104V	Porsche Panamera	10	9.5 - 11	1984	50	11.4	27.9	10/32	30	None
2265900	255/30R20	XL Runflat	92V (e)		9	8.5 - 9.5	1389	50	10.2	26.1	10/32	28	None
2265700	275/30R20	XL Runflat	97V (e)		9.5	9 - 10	1609	50	10.9	26.5	10/32	40	None
1864300	295/30R20	(N0)	97V	Porsche 911 Carrera/S/4/4S	10.5	10.0 - 11.0	1609	51	12.1	27.2	10/32	30	None



# WINTER SOTTOZERO SERIE II

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W270 SOTTOZERO SERIE II</b>													
<b>19" Rim</b>													
1821100	235/40R19	XL (AM9)	96W	Aston Martin V8 VANTAGE / DB9	8.5	8.0 - 9.5	1565	50	9.6	25.6	11/32	28	None
1821600	275/40R19	XL	105W	Bentley Continental GT / Flying Spur	9.5	9.0 - 11.0	2039	50	11.2	27.8	11/32	29	None
2539600	245/35R19	XL (F)	93W	Ferrari LaFerrari	8.5	8 - 9.5	1433	50	9.8	25.8	11/32	22	None
1929900	255/35R19	XL (L)	96W	Lamborghini Aventador LP 700-4 / Roadster	9	8.5 - 10.0	1565	50	10.4	26.2	11/32	28	None
1814700	265/35R19	XL (MO)	98W	Mercedes SLS AMG	9.5	9.0 - 10.5	1653	50	10.9	26.5	10/32	27	None
1821400	275/35R19	XL (AM9)	100W	Aston Martin V8 Vantage / DB9 / Jaguar XK	9.5	9.0 - 11.0	1764	50	11.2	26.7	11/32	30	None
<b>20" Rim</b>													
1924700	235/45R20	XL	100W		8	7.5 - 9.0	1764	50	9.5	28.5	11/32	28	None
1877900	265/45R20	XL	108W	Bentley Mulsanne	9	8.5 - 10.0	2205	50	10.7	29.6	10/32	32	None
1878000	275/40R20	XL	106W	Bentley Continental GT / Flying Spur	9.5	9.0 - 11.0	2094	50	10.9	28.7	11/32	29	None
1938600	235/35R20	XL	92W	Ferrari FF / F458	8.5	8.0 - 9.5	1389	50	9.7	26.6	11/32	25	None
1821200	245/35R20	XL (AMS)	95W	Alfa Romeo 8C Competizione / Aston Martin Virage / DB9 / Maserati Granturismo / MC Stradale / S / Maserati Quattroporte GTS / Sport GT	8.5	8.0 - 9.5	1521	50	10.0	26.9	10/32	25	None
1821500	275/35R20	XL	102W	Alfa Romeo 8C Competizione / Bentley Continental GT / Flying Spur	9.5	9.0 - 11.0	1874	50	11.2	27.7	10/32	30	None
1938700	285/35R20	XL	104W	Ferrari FF / F458 / Maserati Granturismo / MC Stradale / S / Grancabrio	10	9.5 - 11.0	1984	50	11.7	28.0	10/32	30	None
1821700	295/30R20	XL (AMS)	101W	Aston Martin Virage / DB9 / McLaren MP4-12C / Spider / Mercedes SLS AMG	10.5	10.0 - 11.0	1819	50	11.7	26.1	10/32	28	None
2116000	295/30R20	XL (MO)	101W	Mercedes SLS AMG	10.5	10.0 - 11.0	1819	50	11.7	26.1	10/32	27	None
1930000	335/30R20	(L)	104W	Lamborghini Aventador LP 700-4 / Roadster	12	11.5 - 12.5	1984	51	13.8	28.1	10/32	38	None
2506200	335/30R20	(F)	104W	Ferrari LaFerrari	12	11.5 - 12.5	1984	51	13.5	28.0	10/32	36	None

# **SCORPION**

## **WINTER**

### **LIGHT TRUCK & SUV**

**1 INCREASED HANDLING**

Modular block geometry and both directional and symmetric tread pattern design promote tire uniformity during cornering and lane changes.

**2 SNOW BRAKING**

Patented sipe layout technology improves grip on snow even when cornering.

**3 EXCELLENT WET HANDLING AND WET BRAKING PERFORMANCE**

Circumferential grooves improve water expulsion in wet winter conditions.





# SCORPION WINTER

IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION WINTER</b>													
<b>16" Rim</b>													
2308400	215/70R16	XL	104H		6.5	5.5 - 7.0	1984	50	8.7	27.8	11/32	27	None
2474200	225/70R16	RB	103H		6.5	6 - 7.5	1929	44	9.0	28.4	11/32	28	None
2341300	235/70R16		106H		7	6 - 8	2094	44	9.4	29.0	11/32	29	None
2341500	245/70R16	XL	107H		7	6.5 - 8.0	2149	50	9.8	29.5	11/32	33	None
2341700	265/70R16		112H		8	7.0 - 9.0	2469	44	10.7	30.6	11/32	40	None
2272400	215/65R16	XL	102H		6.5	6.0 - 7.5	1874	50	8.9	27.2	11/32	26	None
<b>17" Rim</b>													
2272700	225/65R17		102T		6.5	6.0 - 8.0	1874	44	9.2	28.7	11/32	30	None
2306900	225/65R17	XL RB	106H		6.5	6 - 8	2094	50	9.0	28.5	11/32	30	None
2272800	235/65R17	XL	108H		7	6.5 - 8.5	2205	50	9.6	29.3	11/32	32	None
2307000	235/65R17	XL RB	108V		7	6.5 - 8.5	2205	50	9.4	29.1	11/32	32	None
2341400	245/65R17	XL	111H		7	7.0 - 8.5	2403	50	9.8	29.5	11/32	33	None
2341900	255/65R17	RB	110H		7.5	7 - 9	2337	44	10.2	30.1	11/32	35	None
2341600	265/65R17		112H		8	7.5 - 9.5	2469	44	10.7	30.6	11/32	37	None
2272600	215/60R17	XL	100V		6.5	6.0 - 7.5	1764	50	8.9	27.4	11/32	24	None
2308500	225/60R17	XL	103V		6.5	6 - 8	1929	50	9.0	27.6	11/32	25	None
2272900	235/60R17	XL	106H		7	6.5 - 8.5	2094	50	9.6	28.3	11/32	30	None
2273600	255/60R17		106H		7.5	7.0 - 9.0	2094	44	10.4	29.3	11/32	34	None
2267200	235/55R17	XL	103V		7.5	6.5 - 8.5	1929	50	9.8	27.2	9/32	29	None
<b>18" Rim</b>													
2273100	235/60R18	(NO)	103V	Porsche Macan	7	6.5 - 8.5	1929	51	9.4	29.1	11/32	31	None
2273000	235/60R18	XL	107H	Land Rover Range Rover Evoque / LR2	7	6.5 - 8.5	2149	50	9.6	29.3	11/32	32	None
2322700	255/60R18	(AO)	108H	Audi Q7	7.5	7 - 9	2205	44	10.2	30.0	11/32	40	None
2308700	265/60R18	XL	114H		8	7.5 - 9.5	2601	50	10.7	30.5	11/32	41	None
2273200	235/55R18	XL	104H		7.5	6.5 - 8.5	1984	50	9.8	28.3	11/32	30	None
2273800	255/55R18	(NO)	105V	Porsche Macan	8	7 - 9	2039	51	10.4	29.0	11/32	32	None
2297500	255/55R18	XL (*) Runflat	109H	BMW X5 / X6	8	7 - 9	2271	50	10.4	29.0	11/32	42	None
2297600	255/55R18	XL (*)	109H	BMW X5 / X6	8	7 - 9	2271	50	10.4	29.0	11/32	33	None
2273700	255/55R18	XL	109V		8	7.0 - 9.0	2271	50	10.6	29.3	11/32	35	None
2492800	235/50R18	XL (MO)	101V	Mercedes GLA Class	7.5	6.5 - 8.5	1819	50	9.6	27.3	10/32	26	None
<b>19" Rim</b>													
2288600	235/65R19	XL	109V	Land Rover Range Rover / Sport	7	6.5 - 8.5	2271	50	9.4	31.1	11/32	34	None
2376100	225/55R19	99H			7	6 - 8	1709	44	9.2	28.8	11/32	29	None
2489600	235/55R19	(MOE)	101H		7.5	6.5 - 8.5	1819	44	9.6	29.2	11/32	38	None
2273400	235/55R19	(NO)	101V	Porsche Macan	7.5	6.5 - 8.5	1819	51	9.6	29.2	11/32	31	None
2414700	235/55R19	XL RB	105H	Land Rover Range Rover Evoque / LR2	7.5	6.5 - 8.5	2039	50	9.6	29.2	11/32	30	None
2322600	255/55R19	XL (AO)	111H	Audi Q7	8	7 - 9	2403	50	10.4	30.0	11/32	39	None
2307100	255/55R19	XL	111V		8	7.0 - 9.0	2403	50	10.4	30.0	11/32	37	None
2357900	265/55R19	(MO)	109V		8.5	7.5 - 9.5	2271	51	10.9	30.5	11/32	42	None
2274100	255/50R19	(NO)	103V	Porsche Macan	8	7 - 9	1929	51	10.4	29.1	11/32	30	None
2274000	255/50R19	XL	107V		8	7.0 - 9.0	2149	50	10.6	29.3	11/32	33	None
2297400	255/50R19	XL (*) Runflat	107V	BMW X5 / X6	8	7 - 9	2149	50	10.4	29.1	11/32	40	None
2180800	265/50R19	XL	110V		8.5	7.5 - 9.5	2337	50	11.1	29.7	10/32	36	None
2287400	265/50R19	RB XL (NO)	110V	Porsche Cayenne	8.5	7.5 - 9.5	2337	50	11.1	29.7	10/32	35	None
2180100	275/45R19	XL	108V		9	8.5 - 10.5	2205	50	11.0	29.0	11/32	34	None
2252800	285/45R19	XL Runflat	111V		9.5	9.0 - 10.5	2403	50	11.7	29.2	11/32	43	None
2341800	285/45R19	XL RB	111V		9.5	9 - 10.5	2403	50	11.2	29.1	10/32	35	None
2413800	255/40R19	XL	100H		9	8.5 - 10	1764	50	10.2	27.0	11/32	25	None
<b>20" Rim</b>													
2511600	255/55R20	XL	110V		8	7 - 9	2337	50	10.4	31.0	11/32	37	None
2179700	255/50R20	XL	109V		8	7.0 - 9.0	2271	50	10.6	30.3	11/32	34	None
2518200	265/50R20	XL	111H		8.5	7.5 - 9.5	2403	50	10.9	30.5	11/32	36	None
2440600	275/50R20	(MO)	109V	Mercedes GL Class	8.5	7.5 - 9.5	2271	51	11.2	30.9	10/32	41	None
2415500	245/45R20	XL RB	103V		8	7.5 - 9	1929	50	9.6	28.7	11/32	28	None
2179500	255/45R20	XL	105V		8.5	8.0 - 9.5	2039	50	10.2	29.3	11/32	31	None
2204000	265/45R20	(NO)	104V	Porsche Macan	9	8.5 - 10	1984	51	10.5	29.4	10/32	34	None
2179900	265/45R20	XL (MO)	108V	Mercedes ML Class	9	8.5 - 10.0	2205	50	10.7	29.6	11/32	34	None
2285300	275/45R20	XL (MO)	110V	Mercedes GL Class AMG	9	8.5 - 10.5	2337	50	10.7	29.8	10/32	34	None
2180000	275/40R20	XL	106V		9.5	9.0 - 11.0	2094	50	11.2	28.8	11/32	32	None
2378300	285/40R20	XL (*)	108V	BMW - X5M / X6M	10	9.5 - 11	2205	50	11.4	29.0	11/32	36	None
2203900	295/40R20	(NO)	106V	Porsche Macan	10.5	10 - 11.5	2094	51	11.9	29.3	11/32	35	None
<b>21" Rim</b>													
2440800	275/45R21	(MO)	107V	Mercedes MLC	9	8.5 - 10.5	2149	51	10.7	30.7	11/32	37	None
2506700	275/45R21	XL	110V		9	8.5 - 10.5	2337	50	10.7	30.7	11/32	38	None
2405300	255/40R21	XL	102V		9	8.5 - 10	1874	50	10.2	29.0	11/32	32	None
2530400	265/40R21	XL	105V		9.5	9.0 - 10.5	2039	50	10.7	29.3	11/32	30	None
2550000	295/40R21	XL	111V		10.5	10 - 11.5	2403	50	11.9	30.3	10/32	34	None
2440700	315/40R21	(MO)	111V	Mercedes MLC	11	10.5 - 12.5	2403	51	12.6	30.9	11/32	45	None
2180900	295/35R21	XL	107V		10.5	10.0 - 11.5	2149	50	12.1	29.3	11/32	34	None
2298400	295/35R21	XL (MO)	107V	Mercedes ML Class AMG	10.5	10 - 11.5	2149	50	11.9	29.1	10/32	36	None
<b>22" Rim</b>													
2429200	275/40R22	XL	108V (e)		9.5	9 - 11	2205	50	10.9	30.7	11/32	34	None

# SOTTOZERO™

- Low profile Ultra High Performance technology makes the Sottozero a sporty winter tire for driving pleasure with an increased sense of security.
- It possesses high speed stability, precise turn-in, and efficient grip under braking and through corners under acceleration.
- Available in Run Flat Technology (See Road Hazard Warranty).



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W210 SOTTOZERO</b>													
<b>16" Rim</b>													
1630500	195/55R16	(MO)	87H	Mercedes A Class	6	5.5 - 7.0	1201	44	7.9	24.5	11/32	19	None
1872200	205/45R16	XL	87H		7	6.5 - 7.5	1201	50	8.3	23.4	11/32	19	None
<b>17" Rim</b>													
1511700	235/55R17	(*)	99H	BMW X3	7.5	6.5 - 8.5	1709	44	9.9	27.2	11/32	29	None
1827400	235/45R17	(MO)	94H	Mercedes E Class	8	7.5 - 9.0	1477	44	9.4	25.5	11/32	24	None
1498200	205/40R17	XL	84H		7.5	7.0 - 8.0	1102	50	8.5	23.5	11/32	20	None
<b>18" Rim</b>													
1553200	225/60R18		100H	Chrysler 300C	6.5	6.0 - 8.0	1764	44	9.2	28.8	11/32	30	None
1772300	225/55R18		98H		7	6.0 - 8.0	1653	44	9.4	28.0	11/32	28	None
1758000	225/45R18	XL (AO)	95H	Aude A4 / A5	7.5	7.0 - 8.5	1521	50	9.0	26.1	11/32	23	None
<b>W240 SOTTOZERO</b>													
<b>17" Rim</b>													
1571400	235/55R17	(MO)	99V	Jaguar XJ / XF / Mercedes S Class	7.5	6.5 - 8.5	1709	51	9.9	27.2	11/32	27	None
1705100	255/45R17	(MO)	98V	Ferrari F456 GtM / GtA / Mercedes SL	8.5	8.0 - 9.5	1653	51	10.2	26.3	11/32	26	None
<b>18" Rim</b>													
1901100	255/45R18	(MO)	99V	Mercedes S Class	8.5	8.0 - 9.5	1709	51	10.2	27.1	11/32	29	None
1558700	245/40R18	XL (MO)	97V	Jaguar S-Type / Mercedes CLS / E Class	8.5	8.0 - 9.5	1609	50	10.0	26.0	11/32	26	None
1696000	245/35R18	XL	92V	Lamborghini Murcielago LP640 / LP650-4 Roadster / LP670-4 SV / DIABLO VT/VT Roadster/SV	8.5	8.0 - 9.5	1389	50	10.0	24.9	11/32	22	None
1599800	335/30R18		102V	Lamborghini Murcielago LP640 / LP650-4 Roadster / LP670-4 SV / Diablo VT/VT Roadster/SV	12	11.5 - 12.5	1874	51	13.8	26.1	10/32	32	None
<b>19" Rim</b>													
1599600	245/40R19	XL	98V	Ferrari California / F599 GTB Fiorano / GTB HGTE / GTB Sa Aperta / F612 / Jaguar XK / XF / Maserati GranTurismo S	8.5	8.0 - 9.5	1653	50	10.0	26.9	11/32	25	None
1707600	255/40R19	XL (MO)	100V	Mercedes CL / S Class / AMG	9	8.5 - 10.0	1764	50	10.4	27.1	11/32	27	None
1516500	285/40R19		103V	Ferrari California / F612 / Maserati GranTurismo / S / Grancabrio	10	9.5 - 11.0	1929	51	11.7	28.1	11/32	31	None
1642900	225/35R19	XL	88V	Ferrari F430 Scuderia/Spider / F430	8	7.5 - 9.0	1235	50	9.2	25.4	11/32	23	None
1862900	245/35R19	XL (MO)	93V	Mercedes CLS AMG / E Class AMG	8.5	8.0 - 9.5	1433	50	9.8	24.8	10/32	25	None
1644300	285/35R19	XL	103V	Ferrari F430 Scuderia/Spider / F430 / Maserati Quattroporte / GTS / Sport GT	10	9.5 - 11.0	1929	50	11.7	27.0	11/32	32	None
<b>20" Rim</b>													
1702500	255/35R20	XL	97V	Ferrari F12 / F599 GTB GTD / Jaguar XK / R-S / R-S GT / F-TYPE / XF	9	8.5 - 10.0	1609	50	10.4	27.2	11/32	29	None
1690800	305/35R20		104V	Ferrari F12 / F599 GTB Fiorano / GTB GTD / GTB HGTE / GTB Sa Aperta	11	10.0 - 12.0	1984	51	12.6	28.6	11/32	31	None
1702600	285/30R20	XL	99V	Jaguar XK R-S / XK / R-S GT / F-TYPE / XF / Maserati Quattroporte / GTS / Sport GT	10	9.5 - 10.5	1709	50	11.7	26.9	10/32	30	None



## SNOWCONTROL™ SERIE 3

- **GREEN PERFORMANCE** - a synergy of performance, safety, driving pleasure and attention to the environment in moderate to extreme winter conditions.
- Winter tire developed to meet all safety requirements for city and compact cars.
- Highly suitable in urban, country and mountainous conditions.



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W190 SNOWCONTROL SERIE 3</b>													
<b>14" Rim</b>													
2125000	185/60R14		82T		5.5	5 - 6.5	1047	44	7.4	22.8	11/32	17	None
<b>W210 SNOWCONTROL SERIE 3</b>													
<b>15" Rim</b>													
2284500	175/65R15	(*)	84H	Mini Cooper	5	5 - 6		44	7.0	24.0	10/32	16	None
2361400	205/65R15		94H		6	5.5 - 7.5	1477	44	8.2	25.5	9/32	20	None
2130400	185/55R15	XL	86H		6	5 - 6.5	1168	50	7.6	23.0	9/32	16	None
<b>16" Rim</b>													
2301000	195/55R16	(*) Runflat	87H	Mini Cooper	6	5.5 - 7	1201	44	7.9	24.4	10/32	22	None
2517000	195/55R16	XL	91H		6	5.5 - 7	1356	50	7.9	24.4	10/32	19	None
2377800	195/50R16	XL	88H		6	5.5 - 7	1235	50	7.9	23.7	10/32	17	None
2130500	195/45R16	XL	84H		6.5	6 - 7.5	1102	50	7.7	22.9	9/32	17	None

## SNOWSPORT™

- Winter tire derived from Pirelli Ultra High Performance technology.
- Sophisticated winter tire is offered in speed symbols V and H.
- Unique footprint ensures comfort and safety at low temperatures in wet, dry and snow.



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>W240 SNOWSPORT</b>													
<b>18" Rim</b>													
1528200	225/40R18	XL (N3)	92V	Maserati Coupe / Spyder / Porsche 911 / Boxster	8	7.5 - 9.0	1389	50	9.1	25.1	11/32	23	None
1528100	265/35R18	XL (N3)	97V	Maserati Coupe / Spyder / Porsche 911 / Boxster	9.5	9.0 - 10.5	1609	50	10.7	25.2	11/32	26	None



# SCORPION™ ICE AND SNOW

- Winter tire with excellent handling and supreme driving comfort.
- Ensures grip and low noise levels at low temperatures.
- Available in Runflat Technology (See Road Hazard Warranty).



IP Code	Size	Notes	LI/SR(e)	Homologations & Recommendations	Measuring Rim	Approved Rims	Max Load	Max PSI	SW	OD	Tread Depth	Ship LBS	UTQG
<b>SCORPION ICE AND SNOW</b>													
<b>16" Rim</b>													
1219400	255/65R16		109T		7.5	7.0 - 9.0	2271	44	10.4	29.3	14/32	34	None
<b>17" Rim</b>													
1625700	235/65R17	XL (MO NO)	108H	Mercedes ML Class / R Class / Porsche Cayenne / Volkswagen Touareg	7	6.5 - 8.5	2205	50	9.6	29.2	13/32	34	None
1767500	235/60R17	(MO)	102H	Mercedes GLK	7	6.5 - 8.5	1874	44	9.6	28.3	11/32	31	None
1219600	275/55R17		109H	Mercedes ML Class	8.5	7.5 - 9.5	2271	44	11.0	29.3	13/32	42	None
<b>18" Rim</b>													
1640300	235/65R18	XL	110H		7	6.5 - 8.5	2337	50	9.4	30.2	13/32	35	None
1526800	235/60R18	XL (NO)	107H	Audi Q7 / Porsche Cayenne	7	6.5 - 8.5	2149	50	9.5	29.0	10/32	33	None
1818100	245/60R18		105H		7	7.0 - 8.5	2039	44	10.0	29.8	13/32	38	None
1621900	255/55R18	XL (MO)	109H	Mercedes ML Class / R Class	8	7.0 - 9.0	2271	50	10.4	29.3	10/32	35	None
1939000	255/55R18	XL (N1)	109V	Porsche Cayenne	8	7.0 - 9.0	2271	50	10.4	29.3	10/32	34	None
<b>19" Rim</b>													
1709200	265/55R19	(MO)	109V	Mercedes GL Class	8.5	7.5 - 9.5	2271	51	11.1	30.7	10/32	39	None
1622000	255/50R19	XL (MO)	107H	Mercedes ML Class / R Class	8	7.0 - 9.0	2149	50	10.4	29.0	10/32	33	None
1504400	255/50R19	XL (NO)	107V	Porsche Cayenne / Volkswagen Touareg	8	7.0 - 9.0	2149	50	10.4	29.0	10/32	34	None
1806400	265/50R19	XL (NO)	110V	Porsche Cayenne	8.5	7.5 - 9.5	2337	50	11.1	29.7	10/32	38	None
<b>20" Rim</b>													
1928600	275/50R20	(MO)	109H (e)	Mercedes GL Class	8.5	7.5 - 9.5	2271	44	11.4	31.1	10/32	36	None
1938900	275/45R20	XL (NO)(MO)	110V	Porsche Cayenne	9	8.5 - 10.5	2337	50	10.7	29.8	11/32	37	None
1640600	295/45R20	XL	114V (e)		10	9.5 - 11.0	2601	50	11.7	30.5	10/32	44	None
1776500	275/40R20	XL (NO)	106V	Porsche Cayenne / GTS	9.5	9.0 - 11.0	2094	50	11.2	28.8	10/32	33	None
2050000	275/40R20	XL Runflat (*)	106V (e)	BMW X5 / X6	9.5	9.0 - 11.0	2094	50	11.2	28.8	10/32	38	None
1656100	295/40R20	XL	110V (e)		10.5	10.0 - 11.5	2337	50	12.1	29.5	10/32	40	None
2050100	315/35R20	XL Runflat (*)	110V (e)	BMW X5 / X6	11	10.5 - 12.5	2337	50	12.9	28.8	10/32	42	None
<b>21" Rim</b>													
1928700	265/45R21		104H (e)		9	8.5 - 10.0	1984	44	10.7	30.4	10/32	37	None
1932700	285/35R21	XL Runflat	105V (e)		10	9.5 - 11.0	2039	50	11.7	29.0	11/32	37	None
1932600	325/30R21	XL Runflat	108V (e)		11.5	11.0 - 12.0	2205	50	13.3	28.9	11/32	40	None



OUR ULTIMATE WINTER GRIP



# PIRELLI HOMOLOGATION PROCESS

One of the key targets for a tire producer is to obtain an Original Equipment Manufacturer (OEM) marking for its tires. This approval is the reward for several years of research and development. The homologated tire is the best compromise for that vehicle model and is characterised by safe driving on wet roads and balanced handling characteristics, excellent comfort and noise performance over the entire service life.

**The homologation process works in parallel with the OEM's vehicle development process and takes around 3 years.**



## Vehicle Development

## Tire Development


### Target Letter

This phase takes around 2-3 months

### Development




The tire manufacturer receives a target letter from the vehicle maker. This document outlines all the targets the tire must achieve in product performance and quality.

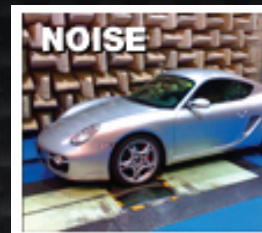

The tire manufacturer submits tires to the OEM who checks that they meet its product performance and quality requirements.

Technical Homologation

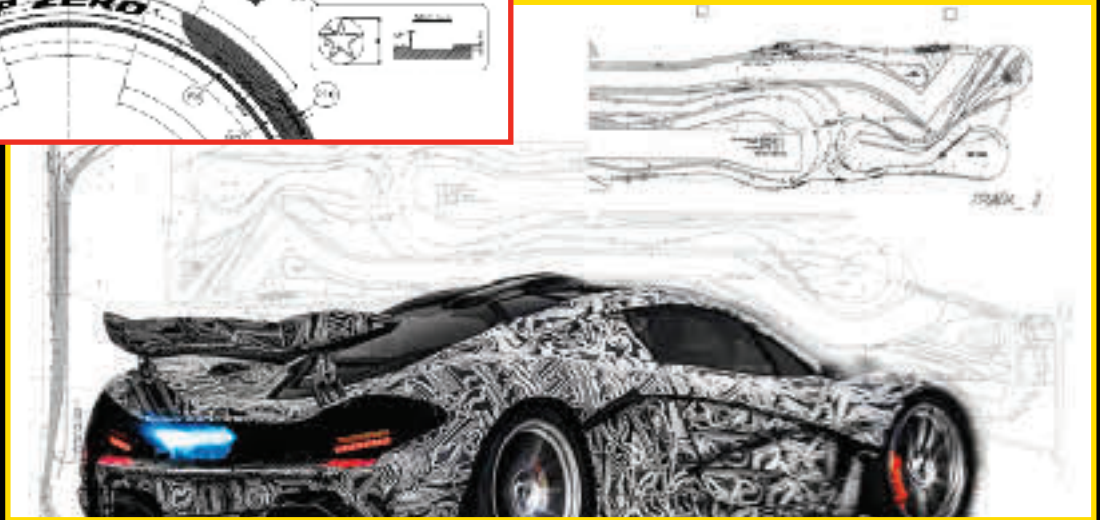

This phase takes around 2-3 years

Prior to providing the selected tires to the vehicle maker the tire manufacturer carries out several indoor and outdoor tests: handling in both dry and wet, aquaplaning, winter performance, rolling resistance, integrity and high speed.



## Industrialization

This phase takes around 2-6 months

The tire producer industrialises the homologated tire into the manufacturing process.



Final Homologation

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>ALFA ROMEO</b>					
8C Competizione	245/35ZR20 XL	(95 Y) (AMS) Front	P ZERO	1715800	2009 - 2010
	285/35ZR20	(100 Y) Rear	P ZERO	1720000	2009 - 2010
4C	205/40ZR18 XL	86 Y (ARR) Front	P ZERO	2424600	2013 >
	235/35ZR19 XL	91 Y (ARR) Rear	P ZERO	2439700	2013 >
	205/45ZR17 XL	88 Y (AR) Front	P ZERO	2207200	2013 >
	235/40ZR18 XL	95 Y (AR) Rear	P ZERO	2404700	2013 >
	205/40ZR18 XL	86 Y (AR) Front	P ZERO	2207300	2013 >
	235/35ZR19 XL	91 Y (AR) Rear	P ZERO	2404600	2013 >
GIULIETTA	225/40ZR18 XL	(92 Y)	P ZERO ROSSO	1558000	2010 >
	225/40R18 XL	92 W	CINTURATO P7	2330300	2010 >
	225/45R17	91 W (AR)	CINTURATO P7	2419900	2010 >
	225/45R17	91 W	CINTURATO P7	2007000	2010 >
	205/55R16	91 V	CINTURATO P7	2328900	2010 >
<b>WINTER</b>					
8C Competizione	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2009 - 2010
	275/35R20 XL	102 W Rear	W270 SOTTOZERO SERIE II	1821500	2009 - 2010
<b>ASTON MARTIN</b>					
ONE-77	255/35ZR20 XL	(97 Y) (AMP) Front	P ZERO CORSA DIREZIONALE	1912500	2008 - 2012
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2008 - 2012
VANQUISH	255/35ZR20 XL	(97 Y) (AMX) Front	P ZERO	2152000	2012 >
	305/30ZR20 XL	(103 Y) (AMX) Rear	P ZERO	2151900	2012 >
VIRAGE	245/35ZR20 XL	(95 Y) (AMV) Front	P ZERO	2137400	2011 - 2012
	295/30ZR20 XL	(101 Y) (AMV) Rear	P ZERO	2137800	2011 - 2012
DB9	245/35ZR20 XL	(95 Y) (AMS) Front	P ZERO	1715800	2013 >
	295/30ZR20 XL	(101 Y) (AMS) Rear	P ZERO	1715700	2013 >
DBS	245/35ZR20 XL	(95 Y) (AMS) Front	P ZERO	1715800	2007 - 2012
	295/30ZR20 XL	(101 Y) (AMS) Rear	P ZERO	1715700	2007 - 2012
V12 ZAGATO	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2012 >
	295/30ZR19 XL	(100 Y) (AM8) Rear Right	P ZERO CORSA ASIMMETRICO	1853200	2012 >
	295/30ZR19 XL	(100 Y) (AM8) Rear Left	P ZERO CORSA ASIMMETRICO	1853300	2012 >
V12 VANTAGE	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2009 >
	295/30ZR19 XL	(100 Y) (AM8) Rear Right	P ZERO CORSA ASIMMETRICO	1853200	2009 >
	295/30ZR19 XL	(100 Y) (AM8) Rear Left	P ZERO CORSA ASIMMETRICO	1853300	2009 >
	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO	2049000	2009 >
	295/30ZR19 XL	(100 Y) (AM8) Rear	P ZERO	2049100	2009 >
VIRAGE	255/50ZR18	102 Y	P ZERO ASIMMETRICO	0883300	
<b>WINTER</b>					
VIRAGE	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2011 - 2012
	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2011 - 2012
DB9	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2013 >
	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2013 >
DBS	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2007 - 2012
	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2007 - 2012
V8 VANTAGE	235/40R19 XL	96 W (AM9) Front	W270 SOTTOZERO SERIE II	1821100	2006 >
	275/35R19 XL	100 W (AM9) Rear	W270 SOTTOZERO SERIE II	1821400	2006 >
<b>AUDI</b>					
R8	235/35ZR19 XL	(91 Y) (R02) Front	P ZERO CORSA DIREZIONALE	2096900	2011 >
	305/30ZR19 XL	(102 Y) (R02) Rear	P ZERO CORSA ASIMMETRICO 2	2097000	2011 >
	235/35ZR19 XL	(91 Y) (R01) Front	P ZERO	1913600	2006 >
	295/30ZR19 XL	(100 Y) (R01) Rear	P ZERO	1740800	2006 >
	305/30ZR19 XL	(102 Y) (R01) Rear	P ZERO	1777900	2006 >
A8	265/40R20 XL	104 Y (AO)	P ZERO	1849300	2009 >
	265/40R20 XL	104 Y (AO)	P ZERO	1849300	2009 >
	255/45R19 XL	104 Y (AO)	P ZERO	2035100	2009 >
	235/55R18 XL	104 Y (AO)	P ZERO	2065500	2009 >
	235/60R17	102 Y (AO)	P ZERO	1874100	2009 >
	265/40R20 XL	104 H (AO)	P ZERO NERO AS	2494600	2009 >
	265/40R20 XL	104 H (AO)	P ZERO NERO AS	2076700	2009 >
	255/45R19 XL	104 H (AO)	P ZERO NERO AS	1873500	2009 >
	245/45R17	95 H (AO)	CINTURATO P7 ALLSEASON	2220500	2009 >
	255/40ZR19 XL	100 Y	P ZERO ROSSO	1445300	2002 - 2009
	235/50R18 XL	101 Y	P ZERO ROSSO	1401400	2002 - 2009
	P255/40R19 XL	100 V	P6 FOURSEASONS	1572200	2002 - 2009
	P255/45R18	99 H	P6 FOURSEASONS	1560500	2002 - 2009
P235/55R17	99 H	P6 FOURSEASONS	1366400	2002 - 2009	
A7	275/30ZR21 XL	(98 Y) (R01)	P ZERO	2218900	2013 >
	265/35R20 XL	99 Y (AO)	P ZERO	2034700	2010 >
	255/40R19 XL	100 Y (AO)	P ZERO	1996400	2010 >
	255/45R18	99 Y (AO)	P ZERO	1996900	2010 >
	235/55R17	99 Y (AO)	CINTURATO P7	1935000	2010 >
	255/45R18	99 V (AO)	P ZERO NERO AS	2076800	2010 >
	255/40R19 XL	100 H (AO)	CINTURATO P7 ALLSEASON	2141400	2010 >
A6	255/45R18	99 H (AO)	CINTURATO P7 ALLSEASON	2141300	2010 >
	285/30ZR21 XL	(100 Y) (R01)	P ZERO	2417300	2013 >
	275/35ZR20 XL	(102 Y) (R01)	P ZERO	2475000	2013 >
	255/35R20 XL	97 Y (AO)	P ZERO	1997100	2011 >
255/40R19 XL	100 Y (AO)	P ZERO	1996400	2011 >	
245/45R18 XL	100 Y (AO)	P ZERO	1997000	2011 >	

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>AUDI (CONT.)</b>					
A6 (CONT.)	225/55R17	97 Y (AO)	CINTURATO P7	2038500	2011 >
	225/60R16	98 Y (AO)	CINTURATO P7	1999800	2011 >
	245/45R18 XL	100 H (AO)	CINTURATO P7 ALLSEASON	2131000	2011 >
	225/55R17 XL	101 V (AO)	CINTURATO P7 ALLSEASON	2080500	2011 >
A6 ALLROAD	225/55R17	97 H (AO)	CINTURATO P7 ALLSEASON	1998800	2011 >
	255/40R20 XL	101 Y (AO)	P ZERO	2128900	2012 >
A6	255/45R19	100 Y (AO)	P ZERO	2125500	2012 >
	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2004 - 2011
	225/50R17 XL	98 Y (AO)	P7	1908700	2004 - 2011
	255/35ZR18 XL	94 Y	P ZERO ROSSO	1425400	1999 - 2005
A5	205/55R16	91 W (AO)	P7	1180000	1997 - 2004
	275/30ZR20 XL	(97 Y) (R01)	P ZERO	1876200	2010 >
	255/35R19 XL	(96 Y) (AO)	P ZERO	2404300	2007 >
	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2007 >
	255/35R19 XL	(96 Y) (AO)	P ZERO	2404300	2007 >
	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2007 >
	245/40R18 XL	97 Y (AO)	CINTURATO P7	2011600	2007 >
	245/40R18	93 Y (AO)	CINTURATO P7	2011700	2007 >
	245/45R17	95 Y (AO)	CINTURATO P7	1872300	2007 >
	225/50R17	94 Y (AO)	CINTURATO P7	1898700	2007 >
	P245/40R18	93 H (AO)	P6 FOURSEASONS	1779100	2007 >
	P245/45R17	95 H (AO)	P6 FOURSEASONS	1788700	2007 >
	P225/50R17	94 H (AO)	P6 FOURSEASONS	1800900	2007 >
A4	265/30ZR20 XL	94 Y (R01)	P ZERO	2152900	2012 >
	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2008 - 2012
	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2008 - 2012
	245/40R18 XL	97 Y (AO)	CINTURATO P7	2011600	2008 - 2012
	245/40R18	93 Y (AO)	CINTURATO P7	2011700	2008 - 2012
	245/45R17	95 Y (AO)	CINTURATO P7	1872300	2008 - 2012
	225/50R17	94 Y (AO)	CINTURATO P7	1898700	2008 - 2012
	245/40R18	93 H (AO)	CINTURATO P7 ALLSEASON	2220400	2008 - 2012
	245/45R17	95 H (AO)	CINTURATO P7 ALLSEASON	2220500	2008 - 2012
	P245/40R18	93 H (AO)	P6 FOURSEASONS	1779100	2008 - 2012
	P245/45R17	95 H (AO)	P6 FOURSEASONS	1788700	2008 - 2012
	P225/50R17	94 H (AO)	P6 FOURSEASONS	1800900	2008 - 2012
	A4 Allroad	245/45R18	96 Y (AO)	P ZERO	2016900
225/55R17		97 Y (AO)	CINTURATO P7	1872500	2009 >
245/45R18 XL		100 H (AO)	CINTURATO P7 ALLSEASON	2131000	2009 >
A4	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2006 - 2008
	205/55R16	91 W (AO)	P7	1180000	2004 - 2008
	235/40R18 XL	95 H	P6 FOURSEASONS	1621100	2004 - 2008
	P235/45R17	94 H	P6 FOURSEASONS	1366700	2004 - 2008
	205/55R16	91 W (AO)	P7	1180000	2000 - 2004
	205/60R15	91 V	P7	1178700	2000 - 2004
	255/35ZR18 XL	94 Y (MO)	P ZERO	1800400	2000 - 2001
	255/35ZR18 XL	94 Y	P ZERO ROSSO	1425400	2000 - 2001
	225/45R17	91 Y	P6000	1087500	1997 - 2001
A3	225/45R17	91 Y (AO)	CINTURATO P7	2288900	2012 >
	205/55R16	91 W (AO)	CINTURATO P7	2152800	2012 >
	225/45R17 XL	94 V (AO)	CINTURATO P7 ALLSEASON	2152400	2012 >
	225/45R17 XL	91 H (AO)	CINTURATO P7 ALLSEASON	2512000	2012 >
	225/45R17 XL	94 V (AO)	CINTURATO P7 ALLSEASON	2499800	2012 >
	205/55R16	91 W (AO)	P7	1180000	2003 - 2012
	225/40R18 XL	92 H	P ZERO NERO AS	1696500	2003 - 2012
	P225/45R17 XL	94 H	P6 FOURSEASONS	1629700	2003 - 2012
A2	225/45R17	91 Y	P6000	1087500	1996 - 2003
TT	205/40ZR17 XL	84 W	P ZERO NERO	1424100	2000 - 2006
	255/30ZR20 XL	92 Y (R01)	P ZERO	1876000	2014 >
Q7	255/35ZR19 XL	(96 Y) (AO)	P ZERO ROSSO	1518500	2007 >
	225/45R17	91 Y	P6000	1087500	1998 - 2006
	295/35ZR21 XL	107 Y (R01)	P ZERO	1906800	2007 >
Q5	295/40ZR20 XL	110 Y (AO)	P ZERO ROSSO	1743900	2007 >
	275/45ZR20 XL	110 Y (AO)	P ZERO ROSSO	1618000	2007 >
	275/45R20 XL	110 H (AO)	SCORPION ZERO ASIMMETRICO	1748200	2007 >
	P255/55R18 XL	109 V (AO)	SCORPION ZERO ASIMMETRICO	1748500	2007 >
	P255/55R18 XL	109 H (AO)	SCORPION ZERO ASIMMETRICO	1748300	2007 >
Q3	255/40R21 XL	102 Y (R01)	P ZERO	2181400	2009 >
	255/35R20 XL	97 Y (AO)	P ZERO	1997100	2013 >
	255/40R19 XL	100 Y (AO)	P ZERO	1996400	2013 >
	235/50R18	97 Y (R01)	SCORPION VERDE	2410700	2013 >
	235/50R18	97 V (AO)	SCORPION VERDE	1901300	2011 >
	235/55R17	99 V (AO)	SCORPION VERDE	1901400	2011 >
	235/50R18	97 H (AO)	SCORPION VERDE ALLSEASON	2252200	2011 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>AUDI (CONT.)</b>					
<b>WINTER</b>					
A8	235/50R19 XL	103 H (AO)	W210 SOTTOZERO SERIE II	1817700	2009 >
	235/55R18 XL	104 H (AO)	W210 SOTTOZERO SERIE II	1885500	2009 >
	235/60R17	102 H (AO)	W210 SOTTOZERO SERIE II	1885400	2009 >
A7	235/60R16	100 H	W210 SOTTOZERO	1546700	2002 - 2009
	235/55R17	99 H (AO)	W210 SOTTOZERO SERIE II	2001500	2010 >
A6	285/30R21 XL	100 W (R01)	WINTER SOTTOZERO 3	2428400	2013 >
	225/50R18 XL	99 H (AO)	W210 SOTTOZERO SERIE II	2008800	2011 >
	225/55R17	97 H (AO)	W210 SOTTOZERO SERIE II	2051800	2011 >
	225/60R16	98 H (AO)	W210 SOTTOZERO SERIE II	2001600	2011 >
	225/55R16 XL	99 H (AO)	W210 SOTTOZERO	1866000	2004 - 2011
A6 ALLROAD	255/40R20 XL	101 V (AO)	W240 SOTTOZERO SERIE II	2145900	2006 - 2011
A5	225/45R18 XL	95 H (AO)	W210 SOTTOZERO	1758000	2007 >
	225/45R18 XL	95 H (AO)	W210 SOTTOZERO	1758000	2008 - 2012
A4	225/55R16	95 H (AO)(MO)	W210 SOTTOZERO SERIE II	2073000	2008 - 2012
	205/60R16	92 H (AO)(MO)	W210 SOTTOZERO SERIE II	2072900	2008 - 2012
A4 Allroad	225/55R17	97 H (AO)	W210 SOTTOZERO SERIE II	2051800	2009 >
A3	225/40R18 XL	94 V (AO)	WINTER SOTTOZERO 3	2414400	2012 >
	205/50R17 XL	93 H (AO)	WINTER SOTTOZERO 3	2397700	2012 >
TT	225/50R17	94 H (AO) Runflat	W210 SOTTOZERO	1512700	2007 >
Q7	235/60R18 XL	107 H (NO)	SCORPION ICE & SNOW	1526800	2007 >
Q5	225/65R17	102 H (AO)	W210 SOTTOZERO SERIE II	1951900	2009 >
	255/40R19 XL	100 V (R01)	WINTER SOTTOZERO 3	2377000	2011 >
	225/50R18 XL	99 H (AO)	WINTER SOTTOZERO 3	2393600	2011 >
Q3	215/60R17	96 H (AO)	W210 SOTTOZERO SERIE II	2075500	2011 >
	215/65R16	98 H (AO)	W210 SOTTOZERO SERIE II	2075400	2011 >
<b>BENTLEY</b>					
MULSANNE	265/40ZR21 XL	(B)	P ZERO	1936000	2010 >
	265/45ZR20 XL	(108 Y) (B)	P ZERO	1827600	2010 >
ARNAGE	255/40ZR20 XL	(B1)	P ZERO	1915900	1998 - 2010
	255/45ZR19 XL	104 Y	P ZERO ASIMMETRICO	1315100	1998 - 2010
	255/50ZR18	102 Y	P ZERO ASIMMETRICO	0883300	1998 - 2010
	255/50ZR18	102 Y	P ZERO ROSSO	0984900	1998 - 2010
CONTINENTAL GT	275/35ZR21 XL	(103 Y) (B1)	P ZERO	2353700	2011 >
	275/35ZR21 XL	(103 Y) (B)	P ZERO	1874800	2011 >
	275/35ZR21 XL	(103 Y) (BL)	P ZERO	2370900	2011 >
	275/35ZR21 XL	(103 Y) (BL)	P ZERO	2039800	2011 >
	275/40ZR20 XL	(106 Y) (BL)	P ZERO	2361500	2011 >
	275/40ZR20 XL	(106 Y) (B)	P ZERO	1874900	2011 >
	275/35ZR20 XL	(B1)	P ZERO	1745900	2003 - 2011
	275/35ZR20 XL	(B)	P ZERO ROSSO	1604900	2003 - 2011
	275/40ZR19 XL	(105 Y) (B1)	P ZERO ROSSO	1587000	2003 - 2011
CONTINENTAL FLYING SPUR	275/40ZR19 XL	(105 Y) (BC)	P ZERO ROSSO	1839300	2003 - 2011
	275/35ZR21 XL	(103 Y) (BL)	P ZERO	2370900	2013 >
	275/45ZR19 XL	(108 Y) (B)	P ZERO	2168200	2013 >
	275/35ZR20 XL	(B)	P ZERO ROSSO	1604900	2005 - 2013
	275/40ZR19 XL	(105 Y) (B1)	P ZERO ROSSO	1587000	2005 - 2013
CONTINENTAL	275/40ZR19 XL	(105 Y) (BC)	P ZERO ROSSO	1839300	2005 - 2013
	285/45ZR18	103 Y	P ZERO ASIMMETRICO	0960000	1997 - 2000
<b>WINTER</b>					
MULSANNE	265/45R20 XL	108 W	W270 SOTTOZERO SERIE II	1877900	2010 >
CONTINENTAL GT	275/40R20 XL	106 W	W270 SOTTOZERO SERIE II	1878000	2011 >
	275/35R20 XL	102 W	W270 SOTTOZERO SERIE II	1821500	2003 - 2011
	275/40R19 XL	105 W	W270 SOTTOZERO SERIE II	1821600	2003 - 2011
CONTINENTAL FLYING SPUR	275/40R20 XL	106 W	W270 SOTTOZERO SERIE II	1878000	2013 >
	275/35R20 XL	102 W	W270 SOTTOZERO SERIE II	1821500	2005 - 2013
	275/40R19 XL	105 W	W270 SOTTOZERO SERIE II	1821600	2005 - 2013
<b>BMW</b>					
7 SERIES	245/35R21 XL	96 Y (*) Front	P ZERO	1826600	2008 >
	275/30R21 XL	98 Y (*) Rear	P ZERO	1826700	2008 >
	245/40R20 XL	99 Y (*) Front	P ZERO	1874400	2008 >
	275/35R20 XL	102 Y (*) Rear	P ZERO	1874300	2008 >
	245/45R19	98 Y (*) Runflat Front	P ZERO	2137300	2008 >
	275/40R19	101 Y (*) Runflat Rear	P ZERO	2153200	2008 >
	245/45R19	98 Y (*) Runflat Front	P ZERO	1788900	2008 >
	275/40R19	101 Y (*) Runflat Rear	P ZERO	1788800	2008 >
	245/50R18	100 Y (*) Runflat	P ZERO	1789000	2008 >
	245/35ZR21 XL	(96 Y) (*) Front	P ZERO NERO	1567700	2002 - 2008
	285/30ZR21 XL	(100 Y) (*) Rear	P ZERO NERO	1567800	2002 - 2008
	245/45R19	98 Y (*) Front	P ZERO ROSSO	1486600	2002 - 2008
	275/40R19	101 Y (*) Rear	P ZERO ROSSO	1486700	2002 - 2008
	245/50R18	100 W (*)	P ZERO ROSSO	1333400	2002 - 2008
	6 SERIES GRAN COUPE	245/40R19	94 Y (*) Runflat Front	P ZERO	1941800
275/35R19		96 Y (*) Runflat Rear	P ZERO	1921100	2012 >
245/45R18		96 Y (*) Runflat Front	CINTURATO P7	2074800	2012 >
275/40R18		99 Y (*) Runflat Rear	CINTURATO P7	2074700	2012 >
225/55R17		97 Y (*) Runflat	CINTURATO P7	1951500	2012 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE	
<b>BMW (CONT.)</b>						
5 SERIES GT	245/35R21 XL	96 Y (*) Front	P ZERO	1826600	2009 >	
	275/30R21 XL	98 Y (*) Rear	P ZERO	1826700	2009 >	
	245/40R20 XL	99 Y (*) Front	P ZERO	1874400	2009 >	
	275/35R20 XL	102 Y (*) Rear	P ZERO	1874300	2009 >	
	245/45R19	98 Y (*) Runflat Front	P ZERO	2137300	2009 >	
	275/40R19	101 Y (*) Runflat Rear	P ZERO	2153200	2009 >	
	245/45R19	98 Y (*) Runflat Front	P ZERO	1788900	2009 >	
	275/40R19	101 Y (*) Runflat Rear	P ZERO	1788800	2009 >	
	245/50R18	100 Y (*) Runflat	P ZERO	1789000	2009 >	
	265/35ZR20 XL	(99 Y) (*) Front	P ZERO	2039200	2012 >	
6 SERIES	295/30ZR20 XL	(101 Y) (*) Rear	P ZERO	2039300	2012 >	
	265/40ZR19 XL	(102 Y) (*) Front	P ZERO	2039000	2012 >	
	295/35ZR19 XL	(104 Y) (*) Rear	P ZERO	2039100	2012 >	
	255/40ZR19	(*) Front	P ZERO CORSA DIREZIONALE	2563100	2005 - 2010	
	285/35ZR19	(*) Rear Right	P ZERO CORSA ASIMMETRICO	1975500	2005 - 2010	
	285/35ZR19	(*) Rear Left	P ZERO CORSA ASIMMETRICO	1975500	2005 - 2010	
5 SERIES	265/35ZR20 XL	(99 Y) (*) Front	P ZERO	2039200	2012 >	
	295/30ZR20 XL	(101 Y) (*) Rear	P ZERO	2039300	2012 >	
	265/40ZR19 XL	(102 Y) (*) Front	P ZERO	2039000	2012 >	
	295/35ZR19 XL	(104 Y) (*) Rear	P ZERO	2039100	2012 >	
	245/40R19	94 Y (*) Runflat Front	P ZERO	1941800	2010 >	
	275/35R19	96 Y (*) Runflat Rear	P ZERO	1921100	2010 >	
	245/45R18	96 Y (*) Runflat Front	CINTURATO P7	2074800	2010 >	
	275/40R18	99 Y (*) Runflat Rear	CINTURATO P7	2074700	2010 >	
	225/55R17	97 Y (*) Runflat	CINTURATO P7	1951500	2010 >	
	245/55R17	102 V (*) Runflat	CINTURATO P7	2010200	2010 >	
	225/35R20 XL	90 Y (*) Front	P ZERO	2074600	2013 >	
	255/30R20 XL	92 Y (*) Rear	P ZERO	2074500	2013 >	
	4 SERIES	225/40R19	89 Y (*) Runflat Front	P ZERO	1990700	2013 >
255/35R19		92 Y (*) Runflat Rear	P ZERO	1990800	2013 >	
225/45R18		91 Y (*) Runflat Front	CINTURATO P7	2041000	2013 >	
255/40R18		95 Y (*) Runflat Rear	CINTURATO P7	1990600	2013 >	
225/50R17		94 W (*) Runflat Front	CINTURATO P7	2028000	2013 >	
255/45R17		98 W (*) Runflat Rear	CINTURATO P7	1990400	2013 >	
225/40R19 XL		93 V (*)	CINTURATO P7 ALLSEASON	2418000	2013 >	
225/45R18		91 V (*) Runflat	CINTURATO P7 ALLSEASON	2048900	2013 >	
225/50R17		94 V (*) Runflat	CINTURATO P7 ALLSEASON	2041100	2013 >	
225/45R19		92 W (*) Runflat Front	P ZERO	2141000	2013 >	
255/40R19		96 W (*) Runflat Rear	P ZERO	2141100	2013 >	
3 SERIES GT	225/50R18	95 W (*) Runflat Front	CINTURATO P7	2245600	2013 >	
	255/45R18	99 W (*) Runflat Rear	CINTURATO P7	2245500	2013 >	
	225/55R17	97 W (*) Runflat	CINTURATO P7	2145000	2013 >	
	225/45R19 XL	96 V (*)	CINTURATO P7 ALLSEASON	2369400	2013 >	
	225/50R18 XL	99 V (*)	CINTURATO P7 ALLSEASON	2145200	2013 >	
	225/55R17	97 H (*) Runflat	CINTURATO P7 ALLSEASON	2145100	2013 >	
	225/35R20 XL	90 Y (*) Front	P ZERO	2074600	2012 >	
	255/30R20 XL	92 Y (*) Rear	P ZERO	2074500	2012 >	
	225/40R19	89 Y (*) Runflat Front	P ZERO	1990700	2012 >	
	255/35R19	92 Y (*) Runflat Rear	P ZERO	1990800	2012 >	
3 SERIES	225/45R18	91 Y (*) Runflat Front	CINTURATO P7	2041000	2012 >	
	255/40R18	95 Y (*) Runflat Rear	CINTURATO P7	1990600	2012 >	
	225/50R17	94 W (*) Runflat Front	CINTURATO P7	2028000	2012 >	
	255/45R17	98 W (*) Runflat Rear	CINTURATO P7	1990400	2012 >	
	225/55R16	95 W (*) Runflat	CINTURATO P7	2040900	2012 >	
	205/60R16	92 W (*) Runflat	CINTURATO P7	2040600	2012 >	
	225/45R18	91 V (*) Runflat	CINTURATO P7 ALLSEASON	2048900	2012 >	
	225/50R17	94 V (*) Runflat	CINTURATO P7 ALLSEASON	2041100	2012 >	
	245/35ZR19 XL	(93 Y) (*) Front	P ZERO	1833200	2007 >	
	265/35ZR19 XL	(98 Y) (*) Rear	P ZERO	1833300	2007 >	
	225/35R19 XL	88 Y (*) Front	P ZERO	1924900	2006 - 2011	
	255/30R19 XL	91 Y (*) Rear	P ZERO	1925000	2006 - 2011	
	225/45R17	91 W (*) Runflat Front / AA	P ZERO	1738300	2006 - 2011	
	255/40R17	94 W (*) Runflat Rear	P ZERO	1738600	2006 - 2011	
	225/45R17	91 Y (*) Runflat	CINTURATO P7	2040300	2006 - 2011	
	225/45R17	91 W (*) Runflat	CINTURATO P7	2005800	2006 - 2011	
	225/45R17	91 V (*) Runflat	CINTURATO P7	2005700	2006 - 2011	
	225/50R16	92 W (*)	CINTURATO P7	1948200	2006 - 2011	
	225/50R16	92 V (*)	CINTURATO P7	1951800	2006 - 2011	
	205/55R16	91 V (*)	CINTURATO P7	1911900	2006 - 2011	
	205/55R16	91 H (*)	CINTURATO P7	1912000	2006 - 2011	
	205/55R16	91 H (*)	CINTURATO P7	1912000	1999 - 2006	
	205/55R16	91 V (*)	CINTURATO P7	1911900	1999 - 2006	
	2 SERIES ACTIVE TOURER	225/45R18	91 W (*)	P ZERO	2193000	2014 >
	2 SERIES	225/40R18 XL	92 V (*)	CINTURATO P7 ALLSEASON	2325300	2013 >
	1 SERIES	225/35R19 XL	88 Y (*) Front	P ZERO	2022700	2011 >
245/30R19 XL		89 Y (*) Rear	P ZERO	2022800	2011 >	
225/40R18		88 Y (*) Runflat Front	P ZERO	1992700	2011 >	
245/35R18		88 Y (*) Runflat Rear	P ZERO	1992500	2011 >	
205/50R17		89 W (*) Runflat	CINTURATO P7	2265200	2011 >	
205/50R17		89 Y (*) Runflat	CINTURATO P7	2040400	2011 >	



# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE	
<b>BMW (CONT.)</b>						
1 SERIES (CONT.)	205/55R16	91 W (*) Runflat	CINTURATO P7	2040200	2011 >	
	195/55R16	87 V (*) Runflat	CINTURATO P1	1961900	2011 >	
	195/55R16	87 H (*) Runflat	CINTURATO P1	2027900	2011 >	
	205/50R17	89 V (*) Runflat	CINTURATO P7 ALLSEASON	2041300	2011 >	
	205/50R17	89 W (*) Runflat Front / AA	CINTURATO P7	2005600	2004 >	
	225/45R17	91 W (*) Runflat Rear	CINTURATO P7	2005800	2004 >	
	205/50R17	89 V (*) Runflat Front / AA	CINTURATO P7	2005500	2004 >	
	225/45R17	91 V (*) Runflat Rear	CINTURATO P7	2005700	2004 >	
	205/55R16	91 H (*)	CINTURATO P7	1912000	2004 >	
	205/55R16	91 V (*)	CINTURATO P7	1911900	2004 >	
X5	285/35R21 XL	105 Y (*) Front	P ZERO	2306200	2013 >	
	325/30R21 XL	108 Y (*) Rear	P ZERO	2306300	2013 >	
	275/40R20 XL	106 W (*) Front	P ZERO	2151300	2013 >	
	315/35R20 XL	110 W (*) Rear	P ZERO	2151400	2013 >	
	255/50R19 XL	107 W (*) Front	SCORPION VERDE	2298100	2013 >	
	285/45R19 XL	111 W (*) Rear	SCORPION VERDE	2298000	2013 >	
	255/55R18 XL	109 V (*)	SCORPION VERDE	2298200	2013 >	
	255/50R19 XL	107 H (*)	SCORPION VERDE ALLSEASON	2297800	2013 >	
	255/55R18 XL	109 H (*)	SCORPION VERDE ALLSEASON	2297900	2013 >	
	285/35R21 XL	105 Y (*) Front	P ZERO	2306200	2007 - 2013	
	325/30R21 XL	108 Y (*) Rear	P ZERO	2306300	2007 - 2013	
	275/40R20 XL	106 W (*) Front	P ZERO	2151300	2007 - 2013	
	315/35R20 XL	110 W (*) Rear	P ZERO	2151400	2007 - 2013	
	255/50R19 XL	107 W (*) Front	SCORPION VERDE	2298100	2007 - 2013	
	285/45R19 XL	111 W (*) Rear	SCORPION VERDE	2298000	2007 - 2013	
	255/55R18 XL	109 V (*)	SCORPION VERDE	2298200	2007 - 2013	
	255/50R19 XL	107 H (*)	SCORPION VERDE ALLSEASON	2297800	2007 - 2013	
	255/55R18 XL	109 H (*)	SCORPION VERDE ALLSEASON	2297900	2007 - 2013	
	X6	285/35R21 XL	105 Y (*) Front	P ZERO	2306200	2014 >
		325/30R21 XL	108 Y (*) Rear	P ZERO	2306300	2014 >
275/40R20 XL		106 W (*) Front	P ZERO	2151300	2014 >	
315/35R20 XL		110 W (*) Rear	P ZERO	2151400	2014 >	
255/50R19 XL		107 W (*) Front	SCORPION VERDE	2298100	2014 >	
285/45R19 XL		111 W (*) Rear	SCORPION VERDE	2298000	2014 >	
255/55R18 XL		109 V (*)	SCORPION VERDE	2298200	2014 >	
255/50R19 XL		107 H (*)	SCORPION VERDE ALLSEASON	2297800	2014 >	
255/55R18 XL		109 H (*)	SCORPION VERDE ALLSEASON	2297900	2014 >	
285/35R21 XL		105 Y (*) Front	P ZERO	2306200	2007 - 2013	
325/30R21 XL		108 Y (*) Rear	P ZERO	2306300	2007 - 2013	
275/40R20 XL		106 W (*) Front	P ZERO	2151300	2007 - 2013	
315/35R20 XL		110 W (*) Rear	P ZERO	2151400	2007 - 2013	
255/50R19 XL		107 W (*) Front	SCORPION VERDE	2298100	2007 - 2013	
285/45R19 XL		111 W (*) Rear	SCORPION VERDE	2298000	2007 - 2013	
255/55R18 XL		109 V (*)	SCORPION VERDE	2298200	2007 - 2013	
255/50R19 XL		107 H (*)	SCORPION VERDE ALLSEASON	2297800	2007 - 2013	
255/55R18 XL		109 H (*)	SCORPION VERDE ALLSEASON	2297900	2007 - 2013	
X3		245/35R21 XL	96 Y (*) Front	P ZERO	1826600	2010 - 2013
		275/30R21 XL	98 Y (*) Rear	P ZERO	1826700	2010 - 2013
	245/40R20 XL	99 Y (*) Front	P ZERO	1874400	2010 - 2013	
	275/35R20 XL	102 Y (*) Rear	P ZERO	1874300	2010 - 2013	
	245/45R19	98 Y (*) Runflat Front	P ZERO	1788900	2010 - 2013	
	275/40R19	101 Y (*) Runflat Rear	P ZERO	1788800	2010 - 2013	
	245/45R19	98 Y (*) Runflat Front	P ZERO	2137300	2010 - 2013	
	275/40R19	101 Y (*) Runflat Rear	P ZERO	2153200	2010 - 2013	
	245/50R18	100 Y (*) Runflat	P ZERO	1789000	2010 - 2013	
	245/50R18	100 W (*) Runflat	CINTURATO P7	2136900	2010 - 2013	
	245/55R17	102 V (*) Runflat	CINTURATO P7	2010200	2010 - 2013	
	225/60R17	99 V (*) Runflat	CINTURATO P7	2050300	2010 - 2013	
	225/60R17	99 V (*)	CINTURATO P7	1941900	2010 - 2013	
	245/50R18	100 V (*) Runflat	CINTURATO P7 ALLSEASON	2137100	2010 - 2013	
	245/50R18	100 V (*) Runflat	CINTURATO P7 ALLSEASON	1999100	2010 - 2013	
	225/60R17	99 H (*) Runflat	CINTURATO P7 ALLSEASON	2050500	2010 - 2013	
	245/55R17	102 H (*) Runflat	CINTURATO P7 ALLSEASON	1999000	2010 - 2013	
	235/45R19	95 W (*) Front	P ZERO ROSSO	1521500	2003 - 2010	
	255/40R19	96 W (*) Rear	P ZERO ROSSO	1521600	2003 - 2010	
	235/50R18	97 H (*)	SCORPION STR	1503700	2003 - 2010	
235/55R17	99 H (*)	SCORPION STR	1395100	2003 - 2010		
X1	225/40R19	89 W (*) Runflat Front	P ZERO	2331700	2009 >	
	255/35R19	92 W (*) Runflat Rear	P ZERO	2331800	2009 >	
	225/40R19	89 W (*) Runflat Front	P ZERO	1876500	2009 >	
	255/35R19	92 W (*) Runflat Rear	P ZERO	1876400	2009 >	
	225/45R18	91 V (*) Runflat Front	CINTURATO P7	1873000	2009 >	
	255/40R18	95 V (*) Runflat Rear	CINTURATO P7	1873100	2009 >	
	225/45R18	91 W (*) Runflat Front	CINTURATO P7	1836900	2009 >	
	255/40R18	95 W (*) Runflat Rear	CINTURATO P7	1872600	2009 >	
	225/50R17	94 W (*) Runflat	CINTURATO P7	2028000	2009 >	
	225/50R17	94 V (*) Runflat	CINTURATO P7	2307700	2009 >	
	225/50R17	94 H (*) Runflat	CINTURATO P7	2307600	2009 >	

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>BMW (CONT.)</b>					
<b>WINTER</b>					
7 SERIES	245/45R19 XL	102 V (*) AA / Front	W240 SOTTOZERO SERIE II	2049900	2008 >
	275/40R19 XL	105 V (*) Rear	W240 SOTTOZERO SERIE II	2155500	2008 >
5 SERIES GT	245/50R18	100 H (*) Runflat	W210 SOTTOZERO SERIE II	2282000	2008 >
	245/45R19 XL	102 V (*)	W240 SOTTOZERO SERIE II	2049900	2009 >
	275/40R19 XL	105 V (*) Rear	W240 SOTTOZERO SERIE II	2155500	2009 >
6 SERIES	245/50R18	100 H (*) Runflat	W210 SOTTOZERO SERIE II	2282000	2009 >
	255/40R19 XL	100 V (*)	W240 SOTTOZERO SERIE II	2012000	2012 >
5 SERIES	255/35R20 XL	97 V (*)	WINTER SOTTOZERO 3	2416300	2012 >
	255/40R19 XL	100 V (*)	W240 SOTTOZERO SERIE II	2012000	2012 >
	245/45R18 XL	100 V (*)	W240 SOTTOZERO SERIE II	2093900	2010 >
	225/55R17	97 H (*)	W210 SOTTOZERO SERIE II	2049200	2010 >
	225/55R17	97 H (*) Runflat	W210 SOTTOZERO SERIE II	2159900	2010 >
	225/50R17	94 H (*) Runflat	W210 SOTTOZERO SERIE II	1877000	2003 - 2010
4 SERIES	225/45R18 XL	95 V (*)	W240 SOTTOZERO SERIE II	2354900	2013 >
	225/50R17	94 H (*) Runflat	W210 SOTTOZERO SERIE II	1877000	2013 >
	225/50R17	94 H (*)	W210 SOTTOZERO SERIE II	1954700	2013 >
3 SERIES GT	225/55R17	97 H (*) Runflat	W210 SOTTOZERO SERIE II	2159900	2013 >
	225/55R17	97 H (*)	W210 SOTTOZERO SERIE II	2049200	2013 >
3 SERIES	225/45R18 XL	95 V (*)	W240 SOTTOZERO SERIE II	2157700	2012 >
	225/45R18 XL	95 V (*)	W240 SOTTOZERO SERIE II	2354900	2012 >
	225/50R17	94 H (*) Runflat	W210 SOTTOZERO SERIE II	1877000	2012 >
	225/50R17	94 H (*)	W210 SOTTOZERO SERIE II	1954700	2012 >
	225/55R16	95 H (*)	W210 SOTTOZERO SERIE II	2155400	2012 >
1 SERIES	205/55R16	91 H (*) (MO)	W210 SOTTOZERO SERIE II	1952100	2006 - 2011
	225/40R18 XL	92 V (*)	W240 SOTTOZERO SERIE II	2135900	2011 >
	205/55R16	91 H (*) (MO)	W210 SOTTOZERO SERIE II	1952100	2004 >
X5	275/40R20 XL	106 V (*) Front	SCORPION ICE & SNOW	2050000	2013 >
	315/35R20 XL	110 V (*) Rear	SCORPION ICE & SNOW	2050100	2013 >
	255/50R19 XL	107 V (*)	SCORPION WINTER	2297400	2013 >
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297500	2013 >
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297600	2013 >
	275/40R20 XL	106 V (*) Front	SCORPION ICE & SNOW	2050000	2007 - 2013
	315/35R20 XL	110 V (*) Rear	SCORPION ICE & SNOW	2050100	2007 - 2013
	255/50R19 XL	107 V (*)	SCORPION WINTER	2297400	2007 - 2013
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297500	2007 - 2013
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297600	2007 - 2013
X6	275/40R20 XL	106 V (*) Front	SCORPION ICE & SNOW	2050000	2014 >
	315/35R20 XL	110 V (*) Rear	SCORPION ICE & SNOW	2050100	2014 >
	255/50R19 XL	107 V (*)	SCORPION WINTER	2297400	2014 >
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297500	2014 >
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297600	2014 >
	275/40R20 XL	106 V (*) Front	SCORPION ICE & SNOW	2050000	2007 - 2013
	315/35R20 XL	110 V (*) Rear	SCORPION ICE & SNOW	2050100	2007 - 2013
	255/50R19 XL	107 V (*)	SCORPION WINTER	2297400	2007 - 2013
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297500	2007 - 2013
	255/55R18 XL	109 H (*)	SCORPION WINTER	2297600	2007 - 2013
X3	245/45R19 XL	102 V (*) AA / Front	W240 SOTTOZERO SERIE II	2049900	2010 - 2013
	275/40R19 XL	105 V (*) Rear	W240 SOTTOZERO SERIE II	2155500	2010 - 2013
	225/60R17	99 H (*) Runflat	W210 SOTTOZERO SERIE II	2281900	2010 - 2013
	225/60R17	99 H (*)	W210 SOTTOZERO SERIE II	2001400	2010 - 2013
	205/65R17	96 H (*)	W210 SOTTOZERO SERIE II	2157800	2010 - 2013
	245/50R18	100 H (*) Runflat	W210 SOTTOZERO SERIE II	2282000	2010 - 2013
X1	235/55R17	99 H (*)	W210 SOTTOZERO	1511700	2003 - 2010
	225/45R18	91 H (*) Runflat	W210 SOTTOZERO SERIE II	2049700	2009 >
	225/45R18	91 H (*) Runflat	W210 SOTTOZERO SERIE II	2281700	2009 >
	225/50R17	94 H (*) Runflat	W210 SOTTOZERO SERIE II	1877000	2009 >
	225/50R17	94 H (*)	W210 SOTTOZERO SERIE II	1954700	2009 >
<b>MINI</b>					
PEACEMAN	225/40R19	89 W (*) Runflat	P ZERO	2331700	2010 >
	225/45R18	91 W (*)	P ZERO	2193000	2010 >
	225/45R18	91 V (*) Runflat	CINTURATO P7	1873000	2010 >
	205/55R17	91 V (*) Runflat	CINTURATO P7	2050400	2010 >
	205/55R17	91 V (*) Runflat	CINTURATO P7	1940000	2010 >
	205/55R17	91 V (*)	CINTURATO P7	2001800	2010 >
COUNTRYMAN	205/55R17	91 H (*) Runflat	CINTURATO P7 ALLSEASON	1999200	2010 >
	225/40R19	89 W (*) Runflat	P ZERO	2331700	2010 >
	225/45R18	91 V (*) Runflat	CINTURATO P7 ALLSEASON	2048900	2010 >
	225/45R18	91 W (*)	P ZERO	2193000	2010 >
	225/45R18	91 V (*) Runflat	CINTURATO P7	1873000	2010 >
	205/55R17	91 V (*) Runflat	CINTURATO P7	2050400	2010 >
	205/55R17	91 V (*) Runflat	CINTURATO P7	1940000	2010 >
	205/55R17	91 V (*)	CINTURATO P7	2001800	2010 >
MINI	205/55R17	91 H (*) Runflat	CINTURATO P7 ALLSEASON	1999200	2010 >
	205/45R17 XL	88 Y (*)	P ZERO	2427300	2013 >
	205/40R18 XL	86 W (*)	CINTURATO P7	2245900	2013 >
	205/45R17 XL	88 W (*)	CINTURATO P7	2245800	2013 >
	195/55R16	87 W (*) Runflat	CINTURATO P1	2246000	2013 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>MINI (CONT.)</b>					
MINI (CONT.)	205/45R17 XL	88 V (*)	CINTURATO P7 ALLSEASON	2246100	2011 >
	195/55R16	87 V (*) Runflat	CINTURATO P7 ALLSEASON	2217200	2011 >
	205/40R18 XL	86 W (*)	P ZERO	1758600	2011 >
	205/45R17	84 V (*) Runflat	P ZERO	1817100	2011 >
<b>WINTER</b>					
PACEMAN	205/55R17	91 H (*) Runflat	W210 SOTTOZERO SERIE II	1949000	2010 >
	205/55R17	91 H (*) Runflat	W210 SOTTOZERO SERIE II	2281800	2010 >
	205/55R17	91 H (*)	W210 SOTTOZERO SERIE II	2160000	2010 >
COUNTRYMAN	205/55R17	91 H (*) Runflat	W210 SOTTOZERO SERIE II	1949000	2010 >
	205/55R17	91 H (*) Runflat	W210 SOTTOZERO SERIE II	2281800	2010 >
	205/55R17	91 H (*)	W210 SOTTOZERO SERIE II	2160000	2010 >
MINI	195/55R16	87 H (*) Runflat	W.SNOWCONTROL S.3	2301000	2013 >
	175/65R15	84 H (*)	W.SNOWCONTROL S.3	2284500	2013 >
	175/65R15	84 T (*)	W190 SNOWCONTROL	1439000	2007 - 2010
	175/65R15	84 T (*)	W190 SNOWCONTROL	1439000	2001 - 2007
<b>BUICK</b>					
REGAL	255/35ZR20 XL	(97 Y) (J)	P ZERO	1639000	2013 >
<b>CADILLAC</b>					
CTS	245/40R18	93 Y Runflat Front	P ZERO	2146600	2007 - 2013
	275/35R18	95 Y Runflat Rear	P ZERO	2146700	2007 - 2013
	255/35R19 XL	96 V	CINTURATO P7 ALLSEASON	2146800	2007 - 2013
	P245/40R18	93 V Runflat	P ZERO NERO AS	2404200	2007 - 2013
BLS	235/45R17	94 W	P7	1624600	2007 - 2013
<b>CHEVROLET</b>					
CAMARO	305/30ZR19 XL	(102 Y)	PZERO TROFEO	2219600	2007 - 2013
	245/40ZR21 XL	(100 Y) Front	P ZERO	1809700	2007 - 2013
	275/35ZR21 XL	(103 Y) Rear	P ZERO	1809600	2014 >
	245/45ZR20 XL	103 Y Front	P ZERO	1791700	2014 >
	275/40ZR20 XL	106 Y Rear	P ZERO	1791600	2014 >
	P245/50ZR19 XL	104 W	P ZERO NERO AS	1757300	2014 >
IMPALA	P225/60R16	97 V	P6 FOURSEASONS	1609300	2014 >
<b>CHRYSLER</b>					
300	225/60R18	100 W	P7	1553900	2014 >
<b>WINTER</b>					
300	225/60R18	100 H	W210 SOTTOZERO	1553200	2007 - 2013
<b>DODGE</b>					
CHALLENGER	275/40R20 XL	106 Y	P ZERO	2441300	2007 - 2013
	275/40R20 XL	106 Y	P ZERO NERO AS	2441200	2007 - 2013
VIPER	P295/30ZR18	(94 Y) Front	P ZERO CORSA ASIMMETRICO 2	2307400	2007 - 2013
	P355/30ZR19	(99 Y) Rear	P ZERO CORSA ASIMMETRICO 2	2307500	2007 - 2013
	P295/30ZR18	(94 Y) Front	P ZERO	2307300	2007 - 2013
	P355/30ZR19	(99 Y) Rear	P ZERO	2306100	2007 - 2013
RAM	305/40ZR22 XL	114 W	SCORPION ZERO ASIMMETRICO	1487100	2007 - 2013
<b>JEEP</b>					
GRAND CHEROKEE	295/45ZR20	110 Y Runflat	P ZERO	2116500	2010 - 2013
	295/45ZR20	110 W Runflat	SCORPION VERDE ALLSEASON	2034600	2010 - 2013
	P265/60R18	110 H	SCORPION ATR	1831200	2010 - 2013
	P265/60R18	110 H	SCORPION ATR	2123300	2010 - 2013
	245/45R20	99 W Runflat	SCORPION ZERO ASIMMETRICO	1680900	2010 - 2013
<b>FERRARI</b>					
LAFERRARI	265/30ZR19 XL	(93 Y) (F) Front	P ZERO CORSA ASIMMETRICO 2	2398400	2010 - 2013
	345/30ZR20 XL	(106 Y) (F) Rear	P ZERO CORSA ASIMMETRICO 2	2255900	2010 - 2013
F12	255/35ZR20 XL	(97 Y) (F) Front	P ZERO	2094700	2010 - 2013
	315/35ZR20	(106 Y) (F) Rear	P ZERO	2094800	2010 - 2013
FF	245/35ZR20 XL	(95 Y) (F) Front	P ZERO	1935800	2010 - 2013
	295/35ZR20 XL	(105 Y) (F) Rear	P ZERO	2103800	2010 - 2013
F458	235/35ZR20	(88 Y) Front	P ZERO	1874600	2010 - 2013
	295/35ZR20 XL	(105 Y) Rear	P ZERO	1874500	2010 - 2013
CALIFORNIA T	245/35ZR20 XL	(95 Y) (F01) Front	P ZERO	2490400	2010 - 2013
	285/35ZR20	(100 Y) (F01) Rear	P ZERO	2490500	2010 - 2013
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2003 - 2010
	285/40ZR19	(103 Y) Rear	P ZERO	1723300	2003 - 2010
CALIFORNIA	245/35ZR20 XL	(95 Y) Front	P ZERO	1914100	2003 - 2010
	285/35ZR20	(100 Y) Rear	P ZERO	1915800	2003 - 2010
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2009 >
	285/40ZR19	(103 Y) Rear	P ZERO	1723300	2009 >
F599 GTB	245/35ZR20 XL	(95 Y) (F) Front	P ZERO	1935800	2009 >
	305/35ZR20	(104 Y) (F) Rear	P ZERO	1935900	2009 >
	245/35ZR20 XL	(95 Y) (F) Front	P ZERO	1935800	2009 >
	305/35ZR20	(104 Y) (F) Rear	P ZERO	1935900	2009 >
	245/35ZR20 XL	(95 Y) Front	P ZERO	1638800	2009 >
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2009 >
	305/35ZR20	(104 Y) Rear	P ZERO	1635400	2009 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>FERRARI (CONT.)</b>					
F612	245/35ZR20 XL	(95 Y) (AMS) Front	P ZERO	1715800	2011 >
	285/35ZR20	(100 Y) Rear	P ZERO	1720000	2011 >
	245/45ZR18 XL	(100 Y) Front	P ZERO ROSSO	1514700	2011 >
F430	235/35ZR19 XL	(91 Y) Front	P ZERO CORSA DIREZIONALE	1975300	2011 >
	285/35ZR19	(99 Y) Rear Left	P ZERO CORSA ASIMMETRICO	1975400	2004 >
	285/35ZR19	(99 Y) Rear Right	P ZERO CORSA ASIMMETRICO	1975500	2004 >
	225/35ZR19	(84 Y) Front	P ZERO ROSSO DIREZIONALE	1461400	2004 >
	285/35ZR19	(99 Y) (F) Rear	P ZERO ROSSO	1573200	2004 >
F360	225/35ZR19	(84 Y) Front	P ZERO CORSA DIREZIONALE	1496100	2004 >
	285/35ZR19	(99 Y) Rear Left	P ZERO CORSA ASIMMETRICO	1975400	2004 >
	285/35ZR19	(99 Y) Rear Right	P ZERO CORSA ASIMMETRICO	1975500	2013 >
	215/45ZR18	89 Y (F) Front	P ZERO DIREZIONALE	1074400	2013 >
	275/40ZR18	99 Y (F) Rear	P ZERO ASIMMETRICO	1074300	2013 >
F575/F550	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2013 >
	305/30ZR19 XL	(102 Y) (N1) Rear	P ZERO CORSA ASIMMETRICO 2	1939100	2013 >
	255/40ZR18	95 Y Front	P ZERO ROSSO DIREZIONALE	1119600	2013 >
	295/35ZR18	99 Y Rear	P ZERO ROSSO	1118700	2013 >
	255/40ZR18	95 Y Front	P ZERO ROSSO DIREZIONALE	1119600	2013 >
F355	225/40ZR18	88 Y Front	P ZERO DIREZIONALE	0891300	2007 - 2013
	265/40ZR18	97 Y Rear	P ZERO ASIMMETRICO	0891800	2007 - 2013
F456	255/45ZR17	98 Y (F) Front	P ZERO ASIMMETRICO	0890300	2007 - 2013
	285/40ZR17	100 Y Rear	P ZERO ASIMMETRICO	0891100	2007 - 2013
348	225/40ZR18	88 Y Front	P ZERO DIREZIONALE	0891300	2007 - 2013
	265/40ZR18	97 Y Rear	P ZERO ASIMMETRICO	0891800	2007 - 2013
	215/50ZR17	91 Y Front	P ZERO ASIMMETRICO	0888900	2007 - 2013
F40	255/45ZR17	Rear	P ZERO ASIMMETRICO	0340100	2007 - 2013
	245/40ZR17	Front	P ZERO ASIMMETRICO	1346900	2007 - 2013
	335/35ZR17	106 Y Rear	P ZERO ASIMMETRICO	0898700	2014 >
<b>WINTER</b>					
LAFERRARI	245/35R19 XL	93 W (F) Front	W270 SOTTOZERO SERIE II	2539600	2014 >
	335/30R20	104 W (F) Rear	W270 SOTTOZERO SERIE II	2506200	2014 >
F12	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2014 >
	305/35R20	104 V Rear	W240 SOTTOZERO	1690800	2014 >
FF	235/35R20 XL	92 W Front	W270 SOTTOZERO SERIE II	1938600	2014 >
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2014 >
F458	235/35R20 XL	92 W Front	W270 SOTTOZERO SERIE II	1938600	2007 - 2013
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2007 - 2013
CALIFORNIA T	235/35R20 XL	92 W Front	W270 SOTTOZERO SERIE II	1938600	2007 - 2013
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2007 - 2013
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2007 - 2013
CALIFORNIA	285/40R19	103 V Rear	W240 SOTTOZERO	1516500	2007 - 2013
	235/35R20 XL	92 W Front	W270 SOTTOZERO SERIE II	1938600	2007 - 2013
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2007 - 2013
F599 GTB	245/40R19 XL	98 V Front	W240 SOTTOZERO	1516500	2010 - 2013
	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2010 - 2013
	305/35R20	104 V Rear	W240 SOTTOZERO	1690800	2010 - 2013
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2010 - 2013
	305/35R20	104 V Rear	W240 SOTTOZERO	1690800	2010 - 2013
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2010 - 2013
	305/35R20	104 V Rear	W240 SOTTOZERO	1690800	2010 - 2013
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2010 - 2013
	305/35R20	104 V Rear	W240 SOTTOZERO	1690800	2010 - 2013
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2010 - 2013
F612	285/40R19	103 V Rear	W240 SOTTOZERO	1516500	2010 - 2013
	225/35R19 XL	88 V Front	W240 SOTTOZERO	1642900	2010 - 2013
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2010 - 2013
F430	225/35R19 XL	88 V Front	W240 SOTTOZERO	1642900	2010 - 2013
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2010 - 2013
	225/40R18 XL	92 V Front	W240 SOTTOZERO SERIE II	1813800	2010 - 2013
F355	265/40R18	97 V (N1) Rear	W240 SOTTOZERO SERIE II	1822100	2010 - 2013
	255/45R17	98 V (M0) Front	W240 SOTTOZERO	1705100	2003 - 2010
F456	285/40R17 XL	104 V Rear	W240 SOTTOZERO	1644400	2003 - 2010
	225/40R18 XL	92 V Front	W240 SOTTOZERO SERIE II	1813800	2003 - 2010
348	265/40R18	97 V (N1) Rear	W240 SOTTOZERO SERIE II	1822100	2003 - 2010
<b>FIAT</b>					
500	205/40ZR17 XL	84 W	P ZERO NERO	1424100	2009 >
	205/40ZR17 XL	84 W	P ZERO NERO	1424100	2009 >
	195/45R16 XL	84 V	CINTURATO P7 ALLSEASON	2150100	2009 >
	185/55R15	82 H	CINTURATO P7 ALLSEASON	2013800	2009 >
<b>FORD</b>					
FOCUS	205/55R16	91 W (A0)	P7	1180000	2009 >
FOCUS C-MAX	205/55R16	91 W (A0)	P7	1180000	2009 >
FOCUS	235/40ZR18 XL	95 W	P ZERO NERO AS	2563000	2009 >
	P235/40ZR18 XL	95 W	P ZERO NERO AS	2135100	2008 >
	P205/50R16	87 H	P6 FOURSEASONS	1419900	2008 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>FORD (CONT.)</b>					
FIESTA	205/40ZR17 XL	84 W	P ZERO NERO	1424100	2011 >
	205/40ZR17 XL	84 W	P ZERO NERO	1424100	2011 >
ECOSPORT	205/60R16	92 H	CINTURATO P7	1948700	2011 >
	265/35R20 XL	99 Y	P ZERO	2404400	2011 >
MUSTANG	255/40ZR19	96 Y Front	P ZERO	2295000	2004 >
	275/40ZR19	101 Y Rear	P ZERO	2295100	2004 >
	255/40ZR19	96 W	P ZERO NERO AS	2295200	2004 >
	255/40ZR19	(*) Front	P ZERO CORSA DIREZIONALE	2563100	2004 >
	285/35ZR19	(*) Rear Right	P ZERO CORSA ASIMMETRICO	1975500	2004 >
	285/35ZR19	(*) Rear Left	P ZERO CORSA ASIMMETRICO	1975500	2004 >
	255/40ZR19 XL	(MO) Front	P ZERO	1738100	2013 >
	285/35ZR19 XL	(103 Y) Rear	P ZERO	1907000	2013 >
	255/40ZR19 XL	(MO)	P ZERO	1738100	2013 >
	P245/45ZR19	98 W	P ZERO NERO AS	1712400	2013 >
	P235/50ZR18	97 W	P ZERO NERO AS	1636700	2013 >
	P235/55ZR17	98 W	P ZERO NERO AS	1566100	2013 >
	255/45R20 XL	105 W	SCORPION VERDE	2297100	2013 >
	EDGE	265/40R21 XL	105 V	SCORPION VERDE ALLSEASON	2390800
245/50R20		102 V	SCORPION VERDE ALLSEASON	2372900	2013 >
P235/60R18 XL		107 V (LR)	SCORPION VERDE ALLSEASON	2423300	2007 - 2013
P265/40R22 XL		105 W	SCORPION ZERO ASIMMETRICO	2075300	2007 - 2013
P245/50R20		102 H	SCORPION STR	1993600	2007 - 2013
P285/45R22		110 H	SCORPION STR	1751600	2007 - 2013
EXPEDITION	P275/55R20	111 H	SCORPION STR	1555300	2007 - 2013
	P255/70R18	112 H	SCORPION STR	1625500	2007 - 2013
	P255/70R18	112 S	SCORPION STR	1570100	2007 - 2013
	P275/45R22 XL	112 V	SCORPION ZERO ASIMMETRICO	2075700	2007 - 2013
F-150 LOBO SUPERCREW	P275/55R20	111 T	SCORPION STR	1792400	2007 - 2013
	P275/55R20	111 S	SCORPION ATR	1852000	2014 >
	LT265/70R17	121 S	SCORPION STR	1475100	2014 >
F-250/350 SUPER DUTY	LT265/75R16	123 R	SCORPION STR	1439200	2014 >
	LT265/75R16	123 R	SCORPION STR	1439200	2014 >
EXCURSION	LT265/75R16	123 R	SCORPION STR	1442300	2014 >
	P225/60R18	99 H	P6 FOURSEASONS	1694100	2014 >
FIVE HUNDRED	P225/55R18	97 H	P6 FOURSEASONS	1694000	2014 >
	P225/55R18	97 H	P6 FOURSEASONS	1694000	2014 >
<b>JAGUAR</b>					
XE	235/35R20 XL	92 Y (J) Front	P ZERO	2494400	2007 - 2013
	265/30R20 XL	94 Y (J) Rear	P ZERO	2494500	2007 - 2013
	225/45R18 XL	95 Y (J) Front / AA	CINTURATO P7	2406100	2007 - 2013
	245/40R18 XL	97 Y (J) Rear	CINTURATO P7	2445900	2007 - 2013
	225/55R17 XL	101 W (J)	CINTURATO P7	2486900	2007 - 2013
	205/55R17 XL	95 V (J)	CINTURATO P7	2406000	2007 - 2013
XK	255/35ZR20 XL	(97 Y) (AMP) Front	P ZERO CORSA DIREZIONALE	1912500	2007 - 2013
	305/30ZR20	(99 Y) (MC1) Rear	P ZERO CORSA ASIMMETRICO 2	2148000	2007 - 2013
	255/35ZR20 XL	(97 Y) (JRS) Front	P ZERO	1837600	2007 - 2013
	295/30ZR20 XL	(101 Y) (AMS) Rear	P ZERO	1715700	2010 - 2013
	255/35ZR20 XL	(97 Y) (J) Front	P ZERO	1639000	2010 - 2013
	285/30ZR20 XL	(99 Y) (J) Rear	P ZERO	1906000	2010 - 2013
	245/40ZR19 XL	(98 Y) (J) Front	P ZERO	1876600	2010 - 2013
	275/35ZR19 XL	(100 Y) (J) Rear	P ZERO	1850400	2010 - 2013
	245/45ZR18	96 Y Front / AA	P ZERO DIREZIONALE	0899100	2010 - 2013
	255/45ZR18	99 Y Rear	P ZERO ASIMMETRICO	0890400	2010 - 2013
	245/50ZR17	99 Y	P ZERO ASIMMETRICO	0862100	2010 - 2013
F-TYPE	255/35ZR20 XL	(97 Y) (JRS) Front	P ZERO	1837600	2010 - 2013
	295/30ZR20 XL	(101 Y) (AMS) Rear	P ZERO	1715700	2010 - 2013
	245/40ZR19	(94 Y) (J) Front	P ZERO	2218200	2010 - 2013
	275/35ZR19	(96 Y) (J) Rear	P ZERO	2218300	2010 - 2013
XJ	265/35ZR20 XL	(99 Y) (J) Front	P ZERO	2361200	2010 - 2013
	295/30ZR20 XL	(101 Y) (J) Rear	P ZERO	2361300	2010 - 2013
	245/45ZR19 XL	(102 Y) (J) Front	P ZERO	1875500	2010 - 2013
	275/40ZR19 XL	(105 Y) (J) Rear	P ZERO	1875700	2010 - 2013
	245/40R20 XL	99 W (J) Front / AA	P ZERO NERO AS	2026300	2010 - 2013
	275/35R20 XL	102 W (J) Rear	P ZERO NERO AS	2026200	2003 - 2010
	P245/45R19 XL	102 H (J) Front	P ZERO NERO AS	1957300	2003 - 2010
	P275/40R19 XL	105 H (J) Rear	P ZERO NERO AS	1957400	2003 - 2010
	255/45ZR19 XL	104 Y	P ZERO ASIMMETRICO	1315100	2003 - 2010
	255/40ZR19	96 Y	P ZERO ASIMMETRICO	0732100	2009 >
	235/50ZR18	97 W	P6000 POWERGY	1330600	2009 >
	235/50ZR17	96 Y	P6000 POWERGY	1368200	2009 >
	P255/40R19 XL	100 V	P6 FOURSEASONS	1572200	2009 >
	P235/55R17	99 H	P6 FOURSEASONS	1366400	2009 >
XJS	255/40ZR18	95 Y	P ZERO ASIMMETRICO	0926100	2009 >
	255/35ZR19 XL	96 Y	P ZERO ASIMMETRICO	1336300	2009 >
	255/40ZR18	95 Y	P ZERO ASIMMETRICO	0926100	2009 >
	255/35ZR19 XL	96 Y	P ZERO ASIMMETRICO	1336300	2009 >
	235/60R15	98 W	P600	1044400	2009 >
	265/35ZR20 XL	(99 Y) (J) Front	P ZERO	2361200	2009 >
	295/30ZR20 XL	(101 Y) (J) Rear	P ZERO	2361300	2008 >
	255/35ZR20 XL	(97 Y) (J) Front	P ZERO	1639000	2008 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>JAGUAR (CONT.)</b>					
XF (CONT.)	285/30ZR20 XL	(99 Y) (J) Rear	P ZERO	1906000	2008 >
	245/45ZR18 XL	(100 Y)	P ZERO	1775900	2009 >
	235/55R17	99 W (J)	CINTURATO P7	2256300	2009 >
	235/55R17	99 W	P7	1721600	2009 >
S-TYPE	245/40ZR18 Reinf	97 Y	P ZERO ASIMMETRICO	1112400	2012 >
	235/50ZR17	96 W	P ZERO ASIMMETRICO	1044300	2012 >
	235/50ZR17	96 Y	P6000 POWERGY	1368200	2012 >
X-TYPE	225/45ZR17	91 Y	P ZERO ASIMMETRICO	0889600	2010 >
<b>WINTER</b>					
XE	225/40R19 XL	93 V (J) Front	WINTER SOTTOZERO 3	2563600	2013 >
	255/35R19 XL	96 V (J) Rear	WINTER SOTTOZERO 3	2564000	2012 >
	225/45R18 XL	95 H (J) Front / AA	WINTER SOTTOZERO 3	2563700	2012 >
	245/40R18 XL	97 H (J) Rear	WINTER SOTTOZERO 3	2563500	2012 >
	205/55R17 XL	95 H (J)	WINTER SOTTOZERO 3	2563900	2012 >
	225/50R17 XL	98 H (J)	WINTER SOTTOZERO 3	2563800	2012 >
XK	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2012 >
	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2012 >
	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2012 >
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2012 >
	275/35R19 XL	100 W (AM9) Rear	W270 SOTTOZERO SERIE II	1821400	2007 >
F-TYPE	255/35R20 XL	97 V (J) Front	WINTER SOTTOZERO 3	2495200	2007 >
	285/30R20 XL	99 V (J) Rear	WINTER SOTTOZERO 3	2495300	2006 - 2011
	245/40R19	94 V (J) Front	WINTER SOTTOZERO 3	2397600	2006 - 2011
	275/35R19	96 V (J) Rear	WINTER SOTTOZERO 3	2397500	2006 - 2011
	245/45R18 XL	100 V (J) Front	WINTER SOTTOZERO 3	2513400	2006 - 2011
	275/40R18 XL	103 V (J) Rear	WINTER SOTTOZERO 3	2397400	2006 - 2011
	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	2006 - 2011
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2006 - 2011
XJ	245/40R20 XL	99 V Front	W240 SOTTOZERO SERIE II	1877800	2006 - 2011
	275/35R20 XL	102 V Rear	W240 SOTTOZERO SERIE II	1877700	2006 - 2011
	245/45R19 XL	102 V Front	W240 SOTTOZERO SERIE II	1877500	2006 - 2011
	275/40R19 XL	105 V Rear	W240 SOTTOZERO SERIE II	1877600	2006 - 2011
	235/55R17	99 V (MO)	W240 SOTTOZERO	1571400	1999 - 2006
	255/35R20 XL	97 V Front	W240 SOTTOZERO	1702500	1999 - 2006
XF	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2014 >
	245/45R18 XL	100 V (J)	WINTER SOTTOZERO 3	2513400	2013 >
	245/40R19 XL	98 V	W240 SOTTOZERO	1599600	2011 >
	235/55R17	99 V (MO)	W240 SOTTOZERO	1571400	2011 >
S-TYPE	245/40R18 XL	97 V (MO)	W240 SOTTOZERO	1558700	2011 >
<b>LAMBORGHINI</b>					
AVENTADOR	255/30ZR20 XL	(92 Y) (L) Front	P ZERO	1997300	2011 >
	355/25ZR21 XL	(107 Y) (L) Rear	P ZERO	1997400	2011 >
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2011 >
	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2011 >
	255/30ZR20 XL	(92 Y) (L) Front	P ZERO CORSA ASIMMETRICO 2	2377700	2011 >
	355/25ZR21 XL	(107 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	2377600	2004 >
	255/30ZR20 XL	(92 Y) (L) Front	P ZERO	1997300	2004 >
	355/25ZR21 XL	(107 Y) (L) Rear	P ZERO	1997400	2004 >
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2004 >
	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2004 >
MURCIELAGO	245/35ZR18 XL	(92 Y) Front	P ZERO CORSA DIREZIONALE	1635300	2004 >
	335/30ZR18	(102 Y) Rear Right	P ZERO CORSA ASIMMETRICO	1611800	2013 >
	335/30ZR18	(102 Y) Rear Left	P ZERO CORSA ASIMMETRICO	1611900	2013 >
	245/35ZR18	88 Y Front	P ZERO ROSSO	1118500	2013 >
	335/30ZR18	102 Y Rear	P ZERO ROSSO	1189000	2012 >
DIABLO	235/35ZR18	86 Y Front	P ZERO ASIMMETRICO	0825300	2012 >
	335/30ZR18	102 Y Rear	P ZERO ASIMMETRICO	0892500	2012 >
	245/40ZR17	Front	P ZERO ASIMMETRICO	1346900	2012 >
COUNTACH	335/35ZR17	106 Y Rear	P ZERO ASIMMETRICO	0898700	2012 >
	205/50ZR15	86 W Front	P ZERO ASIMMETRICO	0731900	2012 >
	225/50ZR15	91 Y Front	P ZERO ASIMMETRICO	2096000	2012 >
HURACAN	345/35ZR15	95 Y Rear	P ZERO ASIMMETRICO	0898600	2012 >
	245/30ZR20 XL	(90 Y) (L) Front	P ZERO	2154800	2012 >
	305/30ZR20 XL	(103 Y) (L) Rear	P ZERO	2154700	2012 >
	245/35ZR19 XL	(93 Y) (L) Front	P-ZERO	2544600	2012 >
GALLARDO	305/35ZR19 XL	(102 Y) (L) Rear	P-ZERO	2544500	2012 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2007 >
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2007 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2006 - 2011
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2006 - 2011
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2006 - 2011
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2006 - 2011
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO	1920700	2006 - 2011
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO	1920800	2006 - 2011
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2006 - 2011

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>LAMBORGHINI (CONT.)</b>					
GALLARDO (CONT.)	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2006 - 2011
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO	1920700	2006 - 2011
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO	1920800	2006 - 2011
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2006 - 2011
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	1999 - 2006
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO	1920700	1999 - 2006
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO	1920800	2014 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2013 >
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2011 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO	1920700	2011 >
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO	1920800	2011 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO CORSA DIREZIONALE	1967200	2011 >
	295/30ZR19 XL	(100 Y) (L) Rear	P ZERO CORSA ASIMMETRICO 2	1967300	2011 >
	235/35ZR19 XL	(91 Y) (L) Front	P ZERO	1920700	2011 >
295/30ZR19 XL	(100 Y) (L) Rear	P ZERO	1920800	2011 >	
<b>WINTER</b>					
AVENTADOR	255/35R19 XL	96 W (L) Front	W270 SOTTOZERO SERIE II	1929900	2011 >
	335/30R20	104 W (L) Rear	W270 SOTTOZERO SERIE II	1930000	2004 >
	255/35R19 XL	96 W (L) Front	W270 SOTTOZERO SERIE II	1929900	2004 >
MURCIELAGO	335/30R20	104 W (L) Rear	W270 SOTTOZERO SERIE II	1930000	2004 >
	245/35R18 XL	92 V Front	W240 SOTTOZERO	1696000	2004 >
	335/30R18	102 V Rear	W240 SOTTOZERO	1599800	2004 >
DIABLO	245/35R18 XL	92 V Front	W240 SOTTOZERO	1696000	2004 >
	335/30R18	102 V Rear	W240 SOTTOZERO	1599800	2013 >
HURACAN	245/30R20 XL	90 W (L) Front	WINTER SOTTOZERO 3	2309900	2013 >
	305/30R20 XL	103 W (L) Rear	WINTER SOTTOZERO 3	2310000	2013 >
	245/35R19 XL	93 W (L) Front	WINTER SOTTOZERO 3	2499400	2012 >
	305/35R19	102 W (L) Rear	WINTER SOTTOZERO 3	2551900	2012 >
GALLARDO	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2012 >
	295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2012 >
	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2012 >
	295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2012 >
	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2012 >
	295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2012 >
	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2012 >
	295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2012 >
	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2012 >
	295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2012 >
	235/35R19 XL	91 V (L) Front	W240 SOTTOZERO SERIE II	1857700	2007 >
295/30R19 XL	100 V (L) Rear	W240 SOTTOZERO SERIE II	1962000	2007 >	
<b>LAND ROVER</b>					
RANGE ROVER	275/45R21 XL	110 W (LR)	SCORPION VERDE ALLSEASON	2220300	2006 - 2011
	255/55R20 XL	110 W (LR)	SCORPION VERDE ALLSEASON	2154900	2006 - 2011
	235/65R19 XL	109 V (LR)	SCORPION VERDE ALLSEASON	2119400	2006 - 2011
	255/55R19 XL	111 V	SCORPION ZERO	1780400	2006 - 2011
	255/60R18 XL	112 V	SCORPION ZERO	1780300	2006 - 2011
RANGE ROVER SPORT	275/45R21 XL	110 Y (LR)	SCORPION VERDE ALLSEASON	2166800	2006 - 2011
	255/55R20 XL	110 Y (LR)	SCORPION VERDE ALLSEASON	2166700	2006 - 2011
	235/65R19 XL	109 V (LR)	SCORPION VERDE ALLSEASON	2119400	2006 - 2011
	275/40ZR20 XL	106 Y	SCORPION ZERO ASIMMETRICO	1629900	2006 - 2011
RANGE ROVER EVOQUE	255/50ZR19 XL	107 Y	SCORPION ZERO ASIMMETRICO	1619700	2006 - 2011
	P245/45R20	99 V (LR)	SCORPION VERDE ALLSEASON	1953700	1999 - 2006
	P235/55R19 XL	105 V (LR)	SCORPION VERDE ALLSEASON	1959800	1999 - 2006
DISCOVERY	P235/60R18 XL	107 V (LR)	SCORPION VERDE ALLSEASON	2056000	2014 >
	255/50R20 XL	109 Y	SCORPION ZERO	1780500	2013 >
	255/55R19 XL	111 V	SCORPION ZERO	1780400	2011 >
	255/60R18 XL	112 V	SCORPION ZERO	1780300	2011 >
	255/55R19 XL	111 H (LR)	SCORPION ATR	2535000	2011 >
DISCOVERY SPORT	245/45R20	99 V (LR)	SCORPION VERDE ALLSEASON	2423100	2011 >
	235/60R18 XL	107 V (LR)	SCORPION VERDE ALLSEASON	2423300	2011 >
	235/60R18 XL	107 H (LR)	SCORPION VERDE ALLSEASON	2496200	2011 >
FREELANDER	235/60R18 XL	103 V	SCORPION ZERO	1780200	2011 >
<b>WINTER</b>					
RANGE ROVER	275/45R21 XL	110 V	SCORPION WINTER	2288700	2011 >
	255/55R20 XL	110 V	SCORPION WINTER	2288800	2011 >
	235/65R19 XL	109 V	SCORPION WINTER	2288600	2004 >
RANGE ROVER SPORT	275/45R21 XL	110 V	SCORPION WINTER	2288700	2004 >
	255/55R20 XL	110 V	SCORPION WINTER	2288800	2004 >
	235/65R19 XL	109 V	SCORPION WINTER	2288600	2004 >
RANGE ROVER EVOQUE	235/55R19 XL	105 H	SCORPION WINTER	2414700	2004 >
	235/60R18 XL	107 H	SCORPION WINTER	2273000	2004 >
	225/65R17 XL	106 H	SCORPION WINTER	2306900	2013 >
DISCOVERY SPORT	235/60R18 XL	107 H	SCORPION WINTER	2273000	2013 >
	225/65R17 XL	106 H	SCORPION WINTER	2306900	2013 >
FREELANDER	245/45R20 XL	103 V	SCORPION WINTER	2308800	2012 >
	235/55R19 XL	105 H	SCORPION WINTER	2414700	2012 >
	235/60R18 XL	107 H	SCORPION WINTER	2273000	2012 >
	225/65R17 XL	106 H	SCORPION WINTER	2306900	2012 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE	
<b>LINCOLN</b>						
MKS	245/40R20 XL	99 Y	P ZERO	1716300	2011 >	
MKC	255/40R20 XL	101 V (NO)	CINTURATO P7 ALLSEASON	2128400	2011 >	
MKX	265/40R21 XL	105 V	SCORPION VERDE ALLSEASON	2390800	2011 >	
	265/40ZR21 XL	(B)	P ZERO	1936000	2011 >	
MKZ	P245/40ZR19 XL	98 W	P ZERO NERO AS	1963800	2004 >	
	285/45R22 XL	114 H	SCORPION VERDE ALLSEASON	2347700	2004 >	
	P285/45R22	110 H	SCORPION STR	1751600	2004 >	
	P275/55R20	111 H	SCORPION STR	1555300	2004 >	
	P255/70R18	112 H	SCORPION STR	1625500	2004 >	
	P255/70R18	112 S	SCORPION STR	1570100	2004 >	
<b>LOTUS</b>						
EVORA	235/35ZR19 XL	(91 Y) Front	P ZERO CORSA DIREZIONALE	1975300	2013 >	
	275/30ZR20 XL	(97 Y) (LS) Rear	P ZERO CORSA ASIMMETRICO 2	2064700	2013 >	
	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2013 >	
	255/35ZR19 XL	96 Y (MO1) Rear	P ZERO	1773800	2013 >	
EXIGE	205/45ZR17 XL	88 Y (LS) Front	P ZERO CORSA DIREZIONALE	2115000	2013 >	
	265/35ZR18 XL	97 Y (LS) Rear	P ZERO CORSA ASIMMETRICO 2	2114900	2013 >	
<b>MASERATI</b>						
QUATTROPORTE	245/35ZR21 XL	96 Y (MGT) Front	P ZERO	2216900	2007 - 2013	
	285/30ZR21 XL	100 Y (MGT) Rear	P ZERO	2217000	2007 - 2013	
	245/40ZR20 XL	(99 Y) (MGT) Front	P ZERO	2166300	2007 - 2013	
	285/35ZR20	(100 Y) (MGT) Rear	P ZERO	2166200	2007 - 2013	
	245/45ZR19	(98 Y) (MGT) Front	P ZERO	2166100	2007 - 2013	
	275/40ZR19	(101 Y) (MGT) Rear	P ZERO	2166000	2007 - 2013	
	245/45R19	98 V (MGT) Front	P ZERO NERO AS	2471400	2007 - 2013	
	275/40R19	101 V (MGT) Rear	P ZERO NERO AS	2471500	2007 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1638800	2007 - 2013	
	295/30ZR20 XL	(101 Y) Rear	P ZERO	1800100	2014 >	
	245/40ZR19 XL	(98 Y) Front	P ZERO ROSSO DIREZIONALE	1515900	2014 >	
	285/35ZR19	(99 Y) (F) Rear	P ZERO ROSSO	1573200	2014 >	
	245/45ZR18 XL	(100 Y) Front	P ZERO ROSSO DIREZIONALE	2378400	2014 >	
	285/40ZR18	(101 Y) Rear	P ZERO ROSSO	1514800	2014 >	
	245/40ZR19 XL	(98 Y) Front	P ZERO ROSSO DIREZIONALE	1515900	2014 >	
	285/35ZR19	(99 Y) (F) Rear	P ZERO ROSSO	1573200	2014 >	
	245/45ZR18 XL	(100 Y) Front	P ZERO ROSSO DIREZIONALE	2378400	2014 >	
	285/40ZR18	(101 Y) Rear	P ZERO ROSSO	1514800	2014 >	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1638800	2007 - 2013	
	295/30ZR20 XL	(101 Y) Rear	P ZERO	1800100	2007 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1638800	2007 - 2013	
	285/30ZR20 XL	(99 Y) Rear	P ZERO	1639200	2007 - 2013	
	GHIBLI	245/35ZR21 XL	96 Y (MGT) Front	P ZERO	2216900	2007 - 2013
		285/30ZR21 XL	100 Y (MGT) Rear	P ZERO	2217000	2007 - 2013
245/40ZR20 XL		(99 Y) (MGT) Front	P ZERO	2166300	2007 - 2013	
285/35ZR20		(100 Y) (MGT) Rear	P ZERO	2166200	2007 - 2013	
245/45ZR19		(98 Y) (MGT) Front	P ZERO	2166100	2007 - 2013	
275/40ZR19		(101 Y) (MGT) Rear	P ZERO	2166000	2010 - 2013	
235/50ZR18 XL		(101 Y) (MGT) Front / AA	P ZERO	2166500	2010 - 2013	
275/45ZR18 XL		(107 Y) (MGT) Rear	P ZERO	2166400	2010 - 2013	
245/45R19		98 V (MGT) Front	P ZERO NERO AS	2471400	2010 - 2013	
275/40R19		101 V (MGT) Rear	P ZERO NERO AS	2471500	2010 - 2013	
GRANTURISMO	255/35ZR20 XL	(97 Y) (AMP) Front	P ZERO CORSA DIREZIONALE	1912500	2010 - 2013	
	295/35ZR20 XL	(105 Y) Rear	P ZERO CORSA ASIMMETRICO 2	2029800	2010 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1805300	2010 - 2013	
	285/35ZR20	(100 Y) Rear	P ZERO	1720000	2010 - 2013	
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2010 - 2013	
	285/40ZR19	(103 Y) Rear	P ZERO	1723300	2010 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1638800	2010 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1805300	2010 - 2013	
	285/35ZR20	(100 Y) Rear	P ZERO	1720000	2010 - 2013	
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2010 - 2013	
	285/40ZR19	(103 Y) Rear	P ZERO	1723300	2010 - 2013	
	245/35ZR20 XL	(95 Y) Front	P ZERO	1805300	2010 - 2013	
GRANCABRIO	285/35ZR20	(100 Y) Rear	P ZERO	1720000	2003 - 2010	
	245/40ZR19	(94 Y) Front	P ZERO	1902000	2003 - 2010	
	285/40ZR19	(103 Y) Rear	P ZERO	1723300	2003 - 2010	
	235/35ZR19 XL	(91 Y) Front	P ZERO ROSSO	1336500	2003 - 2010	
GT COUPE	265/30ZR19 XL	(93 Y) Rear	P ZERO ROSSO	1516200	2009 >	
	345/35ZR19	(110 Y) Rear Left	P ZERO CORSA ASIMMETRICO	1515500	2009 >	
MC12	345/35ZR19	(110 Y) Rear Right	P ZERO CORSA ASIMMETRICO	1566600	2009 >	
<b>WINTER</b>						
QUATTROPORTE	245/35R21 XL	96 W Front	WINTER SOTTOZERO 3	2414200	2008 >	
	285/30R21 XL	100 W Rear	WINTER SOTTOZERO 3	2413400	2008 >	
	245/40R20 XL	99 W Front	WINTER SOTTOZERO 3	2371200	2008 >	
	285/35R20	100 W Rear	WINTER SOTTOZERO 3	2371300	2009 >	
	245/45R19	98 W (MGT) Front	WINTER SOTTOZERO 3	2569500	2009 >	
	275/40R19	101 W (MGT) Rear	WINTER SOTTOZERO 3	2569600	2009 >	
	235/50R18 XL	101 V (MGT) Front	WINTER SOTTOZERO 3	2564700	2012 >	
	275/45R18 XL	107 V (MGT) Rear	WINTER SOTTOZERO 3	2564800	2012 >	



# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>MASERATI (CONT.)</b>					
<b>WINTER</b>					
QUATTROPORTE (CONT.)	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2010 >
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2013 >
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2013 >
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2013 >
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2012 >
	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2012 >
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2012 >
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2012 >
	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2012 >
	285/30R20 XL	99 V Rear	W240 SOTTOZERO	1702600	2012 >
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2012 >
	285/35R19 XL	103 V Rear	W240 SOTTOZERO	1644300	2012 >
	GHIBLI	245/35R21 XL	96 W Front	WINTER SOTTOZERO 3	2414200
285/30R21 XL		100 W Rear	WINTER SOTTOZERO 3	2413400	2012 >
245/40R20 XL		99 W Front	WINTER SOTTOZERO 3	2371200	2012 >
285/35R20 XL		100 W Rear	WINTER SOTTOZERO 3	2371300	2007 >
245/45R19		98 W (MGT) Front	WINTER SOTTOZERO 3	2569500	2007 >
275/40R19		101 W (MGT) Rear	WINTER SOTTOZERO 3	2569600	2006 - 2011
235/50R18 XL		101 V (MGT) Front	WINTER SOTTOZERO 3	2564700	2006 - 2011
275/45R18 XL		107 V (MGT) Rear	WINTER SOTTOZERO 3	2564800	2006 - 2011
GRANTURISMO	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2006 - 2011
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2006 - 2011
	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2006 - 2011
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2006 - 2011
	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2006 - 2011
	285/40R19	103 V Rear	W240 SOTTOZERO	1516500	2006 - 2011
	245/35R20 XL	95 W (AMS) Front	W270 SOTTOZERO SERIE II	1821200	2006 - 2011
	285/35R20 XL	104 W Rear	W270 SOTTOZERO SERIE II	1938700	2006 - 2011
GRANCABRIO	245/40R19 XL	98 V Front	W240 SOTTOZERO	1599600	2011 >
	285/40R19	103 V Rear	W240 SOTTOZERO	1516500	2011 >
	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	2011 >
	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2011 >
SPYDER	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	2011 >
	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2011 >
<b>MAZDA</b>					
6	215/45R18 XL	93 W	P ZERO NERO AS	1566500	2011 >
<b>MCLAREN</b>					
P1	245/35ZR19 XL	(93 Y) Front	PZERO TROFEO	2270600	2004 >
	305/30ZR20 XL	(103 Y) Rear	PZERO TROFEO	2271000	2004 >
	245/35ZR19 XL	(93 Y) (MC) Front	P ZERO CORSA ASIMMETRICO 2	2376300	2004 >
	315/30ZR20	(101 Y) (MC) Rear	P ZERO CORSA ASIMMETRICO 2	2129500	2004 >
650S	235/35ZR19 XL	(91 Y) Front	PZERO TROFEO	2219500	2004 >
	305/30ZR20	(99 Y) Rear	PZERO TROFEO	2441400	2004 >
	235/35ZR19 XL	(91 Y) (MC1) Front	P ZERO CORSA ASIMMETRICO 2	2469700	2013 >
	305/30ZR20	(99 Y) (MC1) Rear	P ZERO CORSA ASIMMETRICO 2	2148000	2013 >
	235/35ZR19 XL	(91 Y) (MC1) Front	P ZERO	2023200	2013 >
	305/30ZR20	(99 Y) (MC1) Rear	P ZERO	1931700	2012 >
	235/35ZR19 XL	(91 Y) (MC1) Front	P ZERO CORSA ASIMMETRICO 2	2469700	2012 >
	305/30ZR20	(99 Y) (MC1) Rear	P ZERO CORSA ASIMMETRICO 2	2148000	2012 >
	235/35ZR19 XL	(91 Y) (MC1) Front	P ZERO	2023200	2012 >
	305/30ZR20	(99 Y) (MC1) Rear	P ZERO	1931700	2012 >
<b>WINTER</b>					
P1	235/35R19 XL	91 W Front	WINTER SOTTOZERO 3	2404500	2012 >
	305/30R20 XL	103 W (L) Rear	WINTER SOTTOZERO 3	2310000	2012 >
	235/35R19 XL	91 W Front	WINTER SOTTOZERO 3	2404500	2012 >
650S	305/30R20 XL	103 W (L) Rear	WINTER SOTTOZERO 3	2310000	2012 >
	235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2012 >
	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2012 >
	235/35R19 XL	91 W Front	WINTER SOTTOZERO 3	2404500	2007 >
	305/30R20 XL	103 W (L) Rear	WINTER SOTTOZERO 3	2310000	2007 >
	235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2006 - 2011
	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2006 - 2011
<b>MERCEDES</b>					
SL	255/35R19 XL	96 Y (MO) Front	P ZERO	1997500	2012 >
SL	285/30R19 XL	98 Y (MO) Rear	P ZERO	1997600	2012 >
SL	255/40R18	95 Y (MOE) Runflat Front	P ZERO	2051500	2012 >
SL	285/35R18	97 Y (MOE) Runflat Rear	P ZERO	2051400	2012 >
SL	255/40R18	95 Y (MO) Front	P ZERO	2009200	2012 >
SL	285/35R18	97 Y (MO) Rear	P ZERO	2009300	2012 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>MERCEDES (CONT.)</b>					
SL (CONT.)	255/40R18 XL	99 H (MO) Front	P ZERO NERO AS	1997800	2012 >
	285/35R18	97 H (MO) Rear	P ZERO NERO AS	1997900	2012 >
	255/35ZR19 XL	(96 Y) (MO) Front	P ZERO	2390100	2012 >
	285/30ZR19 XL	(98 Y) (MO) Rear	P ZERO	2390200	2012 >
	255/35ZR19 XL	96 Y (MO1) Front	P ZERO	1773800	2001 - 2011
	285/30ZR19 XL	98 Y (MO1) Rear	P ZERO	1773900	2001 - 2011
	255/35ZR19 XL	96 Y (MO1) Front	P ZERO	1773800	2002 - 2006
S CLASS	285/30ZR19 XL	98 Y (MO1) Rear	P ZERO	1773900	2002 - 2006
	245/40R20 XL	99 Y (MOE) Front	P ZERO	2122600	2013 >
	275/35R20 XL	102 Y (MOE) Rear	P ZERO	2122500	2013 >
	245/45R19 XL	102 Y (MOE) Front	P ZERO	2122800	2013 >
	275/40R19	101 Y (MOE) Runflat Rear	P ZERO	2122700	2013 >
	245/45R19 XL	102 Y (MO) Front	P ZERO	2154000	2013 >
	275/40R19	101 Y (MO) Rear	P ZERO	2200700	2013 >
	245/50R18	100 W (MOE) Runflat Front	CINTURATO P7	2127200	2013 >
	275/45R18	103 W (MOE) Runflat Rear	CINTURATO P7	2127300	2013 >
	245/45R19 XL	102 H (MOE) Front	CINTURATO P7 ALLSEASON	2181700	2013 >
	275/40R19	101 H (MOE) Runflat Rear	CINTURATO P7 ALLSEASON	2181300	2013 >
	255/45ZR19 XL	(104 Y) (MO) Front	P ZERO	2306800	2013 >
	285/40ZR19 XL	(107 Y) (MO) Rear	P ZERO	2306700	2013 >
	255/35ZR20 XL	(MO) Front	P ZERO	1775700	2005 - 2013
	275/35ZR20 XL	(MO) Rear	P ZERO	1775800	2005 - 2013
	255/45R18	99 Y (MO) Front / AA	P ZERO ROSSO	1569500	2005 - 2013
	275/45R18	103 Y (MO) Rear	P ZERO ROSSO	1571700	2005 - 2013
	225/60R16	98 H	P6 FOURSEASONS	1106100	1998 - 2005
	255/40ZR19 XL	(MO) Front	P ZERO	1738100	2006 - 2013
	275/40ZR19 XL	(MO) Rear	P ZERO	1638400	2006 - 2013
CLS	255/40R18 XL	99 Y (MO) Front	P ZERO	2027700	2010 >
	285/35R18	97 Y (MO) Rear	P ZERO	2009300	2010 >
	255/40R18 XL	99 H (MO) Front	P ZERO NERO AS	1997800	2010 >
	285/35R18	97 H (MO) Rear	P ZERO NERO AS	1997900	2010 >
	245/45R17 XL	99 Y (MO)	CINTURATO P7	1830000	2010 >
	255/35ZR19 XL	(96 Y) (MO) Front	P ZERO	2390100	2011 >
	285/30ZR19 XL	(98 Y) (MO) Rear	P ZERO	2390200	2011 >
	245/40R18	93 V (MO)	P6 FOURSEASONS	1621200	2004 - 2010
	275/35R18	95 V (MO)	P6 FOURSEASONS	1621300	2004 - 2010
	255/40ZR18 XL	(99 Y) (MO) Front	P ZERO ROSSO	1591500	2004 - 2010
285/35ZR18 XL	(101 Y) (MO) Rear	P ZERO ROSSO	1591600	2004 - 2010	
E CLASS	245/35R19 XL	93 Y (MO) Front	P ZERO	2031900	2009 >
	275/30R19 XL	96 Y (MO) Rear	P ZERO	2032000	2009 >
	245/40R18 XL	97 Y (MO) Front	P ZERO	1949400	2009 >
	265/35R18 XL	97 Y (MO) Rear	P ZERO	1949500	2009 >
	245/45R17 XL	99 Y (MO)	CINTURATO P7	1830000	2009 >
	245/45R17	95 W (MO)	CINTURATO P7	1829800	2009 >
	225/55R16 XL	99 Y (MO)	CINTURATO P7	1830100	2009 >
	225/55R16 XL	99 W (MO)	CINTURATO P7	1829700	2009 >
	225/55R16	95 W (MO)	CINTURATO P7	1829500	2009 >
	245/40R18 XL	97 V (MO) Front	P ZERO NERO AS	1830300	2009 >
	265/35R18 XL	97 V (MO) Rear	P ZERO NERO AS	1830200	2009 >
	255/35ZR19 XL	(96 Y) (MO) Front	P ZERO	2390100	2009 >
	285/30ZR19 XL	(98 Y) (MO) Rear	P ZERO	2390200	2009 >
	245/40ZR18 XL	97 Y (MO)	P ZERO ROSSO	1569600	2002 - 2009
	245/40R18 XL	97 Y (MO) Front / AA	P ZERO	1949400	2002 - 2009
	265/35R18 XL	97 Y (MO) Rear	P ZERO	1949500	2002 - 2009
	245/45R17	95 W (MO)	CINTURATO P7	1829800	2002 - 2009
	225/55R16	95 W (MO)	CINTURATO P7	1829500	2002 - 2009
	195/65R15	91 H	CINTURATO P6	1791000	1995 - 2002
	235/40ZR18 XL	95 Y (MO) Front	P ZERO	1723000	2009 >
	255/35ZR18 XL	94 Y (MO) Rear	P ZERO	1800400	2009 >
	235/40R18	91 H (MO) Front	P ZERO NERO AS	1795800	2009 >
	255/35R18 XL	94 H (MO) Rear	P ZERO NERO AS	1795700	2009 >
CLK	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2003 - 2006
	245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2003 - 2006
	205/55R16	91 W (MO) Front	CINTURATO P7	2041500	2003 - 2006
	225/50R16	92 W (MO) Rear	CINTURATO P7	2009000	2003 - 2006
	205/55R16	91 V (MO) Front	CINTURATO P7	2060400	2003 - 2006
	225/50R16	92 V (MO) Rear	CINTURATO P7	2009100	2003 - 2006
	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2006 - 2010
	255/35ZR18 XL	94 Y (MO) Rear	P ZERO	1800400	2006 - 2010
	225/45ZR17	91 Y Front	P ZERO ROSSO	1238400	1997 - 2003
	245/40ZR17	91 Y Rear	P ZERO ROSSO	1238300	1997 - 2003
SLK	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2011 >
	245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2011 >
	205/55R16	91 W (MO) Front	CINTURATO P7	2041500	2011 >
	225/50R16	92 W (MO) Rear	CINTURATO P7	2009000	2011 >
	205/55R16	91 V (MO) Front	CINTURATO P7	2060400	2011 >
	225/50R16	92 V (MO) Rear	CINTURATO P7	2009100	2011 >
	235/40ZR18 XL	95 Y (MO) Front	P ZERO	1723000	2011 >
	255/35ZR18 XL	94 Y (MO) Rear	P ZERO	1800400	2011 >
	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2004 - 2011
	245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2004 - 2011

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE	
<b>MERCEDES (CONT.)</b>						
SLK (CONT.)	225/45ZR17	91 Y Front	P ZERO ROSSO	1238400	1996 - 2011	
	245/40ZR17	91 Y Rear	P ZERO ROSSO	1238300	1996 - 2011	
	225/45ZR17	91 Y Front	P ZERO ROSSO	1238400	1996 - 2011	
	245/40ZR17	91 Y Rear	P ZERO ROSSO	1238300	1996 - 2011	
	225/45ZR17	91 Y Front	P ZERO ROSSO	1238400	1996 - 2004	
	245/40ZR17	91 Y Rear	P ZERO ROSSO	1238300	1996 - 2004	
C CLASS	225/40R19 XL	93 Y (MOE) Front	P ZERO	2412000	2014 >	
	255/35R19 XL	96 Y (MOE) Rear	P ZERO	2411900	2014 >	
	225/45R18 XL	95 Y (MOE) Front	CINTURATO P7	2607100	2013 >	
	245/40R18 XL	97 Y (MOE) Rear	CINTURATO P7	2607200	2013 >	
	225/45R18 XL	95 Y (MOE) Front	CINTURATO P7	2374400	2013 >	
	245/40R18 XL	97 Y (MOE) Rear	CINTURATO P7	2302300	2013 >	
	225/50R17	94 W (MOE) Runflat	CINTURATO P7	2302500	2013 >	
	225/55R16	95 V (MOE) Runflat	CINTURATO P7	2352900	2013 >	
	225/50R17	94 H (MOE) Runflat	CINTURATO P7 ALLSEASON	2374300	2013 >	
	225/45R18 XL	95 H (MOE) Front	CINTURATO P7 ALLSEASON	2374200	2013 >	
	245/40R18 XL	97 H (MOE) Rear	CINTURATO P7 ALLSEASON	2374100	2013 >	
	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2007 - 2012	
	245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2007 - 2012	
	255/35ZR18 XL	94 Y (MO) Rear	P ZERO	1800400	2007 - 2012	
	225/45R17	91 W (MO) Front	CINTURATO P7	2153800	2007 - 2012	
	245/40R17	91 W (MO) Rear	CINTURATO P7	2153700	2007 - 2012	
	205/55R16	91 W (MO) Front	CINTURATO P7	2041500	2007 - 2012	
	225/50R16	92 W (MO) Rear	CINTURATO P7	2009000	2007 - 2012	
	205/55R16	91 V (MO) Front	CINTURATO P7	2060400	2007 - 2012	
	225/50R16	92 V (MO) Rear	CINTURATO P7	2009100	2007 - 2012	
	225/40R18 XL	92 H (MO) Front	P ZERO NERO AS	1905700	2007 - 2012	
	255/35R18 XL	94 H (MO) Rear	P ZERO NERO AS	1795700	2007 - 2012	
	225/45R17	91 H (MO) Front	P ZERO NERO AS	1695800	2007 - 2012	
	245/40R17	91 H (MO) Rear	P ZERO NERO AS	1696400	2007 - 2012	
	225/45ZR17	91 Y Front	P ZERO ROSSO	1238400	2000 - 2006	
	245/40ZR17	91 Y Rear	P ZERO ROSSO	1238300	2000 - 2006	
	195/65R15	91 V	CINTURATO P6	1812200	2000 - 2006	
	195/65R15	91 H	CINTURATO P6	1791000	2000 - 2006	
	185/65R15	88 H	CINTURATO P6	1791900	1993 - 2000	
	195/65R15	91 H	CINTURATO P6	1791000	1993 - 2000	
	CLC	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2008 - 2011
		245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2008 - 2011
CLA	225/40R18 XL	92 W (MOE)	P ZERO	2337000	2013 >	
	225/40R18 XL	92 H (MO)	P ZERO NERO AS	1905700	2013 >	
	225/40R18 XL	92 H (MOE)	CINTURATO P7 ALLSEASON	2498200	2013 >	
C CLASS	225/45R17	91 H (MOE) Runflat	CINTURATO P7 ALLSEASON	2031700	2013 >	
	225/40R18 XL	92 H (MO) Front	P ZERO NERO AS	1905700	2008 >	
C CLASS	255/35R18 XL	94 H (MO) Rear	P ZERO NERO AS	1795700	2008 >	
	235/35ZR19 XL	(91 Y) (R01)	P ZERO	1913600	2013 >	
CLA	225/40ZR18 XL	92 Y (MO) Front	P ZERO	1679700	2013 >	
	245/35ZR18 XL	92 Y (MO) Rear	P ZERO	1654900	2013 >	
B CLASS	225/40R18 XL	92 W (MOE)	P ZERO	2337000	2012 >	
	225/45R17	91 V (MO)	CINTURATO P7	2029200	2012 >	
	225/40R18 XL	92 H (MO)	P ZERO NERO AS	1905700	2012 >	
	225/40R18 XL	92 H (MOE)	CINTURATO P7 ALLSEASON	2498200	2012 >	
	225/45R17	91 H (MOE) Runflat	CINTURATO P7 ALLSEASON	2031700	2012 >	
A CLASS	235/35ZR19 XL	(91 Y) (R01)	P ZERO	1913600	2012 >	
	225/40R18 XL	92 W (MOE)	P ZERO	2337000	2012 >	
	225/45R17	91 V (MO)	CINTURATO P7	2029200	2012 >	
	225/40R18 XL	92 H (MO)	P ZERO NERO AS	1905700	2012 >	
	225/40R18 XL	92 H (MOE)	CINTURATO P7 ALLSEASON	2498200	2012 >	
	225/45R17	91 H (MOE) Runflat	CINTURATO P7 ALLSEASON	2031700	2012 >	
GL CLASS	275/50R20	109 H (MO)	SCORPION VERDE ALLSEASON	2154200	2012 >	
	295/40ZR21 XL	111 Y (MO)	P ZERO	2074900	2013 >	
	295/40R21 XL	111 V (MO)	SCORPION ZERO	1721900	2013 >	
	295/40R21 XL	111 V (MO)	SCORPION ZERO	1721900	2007 - 2012	
	275/55R19	111 H (MO)	SCORPION ZERO	1792100	2007 - 2012	
ML CLASS	265/60R18	110 H (MO)	SCORPION STR	1554100	2007 - 2012	
	265/45R20	104 Y (MO)	SCORPION VERDE	1954200	2011 >	
	255/50R19	103 W (MO)	SCORPION VERDE	1954000	2011 >	
	255/55R18	105 W (MO)	SCORPION VERDE	2422100	2011 >	
	255/55R18	105 V (MO)	SCORPION VERDE	1954100	2011 >	
	265/45R20 XL	108 H (MOE)	SCORPION VERDE ALLSEASON	2011400	2011 >	
	265/45R20 XL	108 H (MO)	SCORPION VERDE ALLSEASON	1954300	2011 >	
	255/50R19 XL	107 H (MO)	SCORPION VERDE ALLSEASON	1953900	2011 >	
	295/35ZR21 XL	107 Y (MO)	P ZERO	2122000	2011 >	
	265/45ZR20 XL	108 Y (MO)	P ZERO	2060100	2011 >	
	255/50R19	103 W (MO)	P ZERO ROSSO	1521700	2005 - 2011	
	265/45ZR20	104 Y (MO)	P ZERO ROSSO	1574200	2012 >	
	255/50R19	103 W (MO) Front / AA	P ZERO ROSSO	1521700	2005 - 2011	
	285/45R19	107 W (MO) Rear - Option	P ZERO ROSSO	1609700	2012 >	
	265/45R20 XL	108 H (MO)	SCORPION ZERO ASIMMETRICO	1842500	2005 - 2011	
	255/50R19	103 W (MO)	SCORPION ZERO ASIMMETRICO	1771100	2012 >	

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>MERCEDES (CONT.)</b>					
R CLASS	265/45R20	104 Y (MO)	P ZERO ROSSO	1574200	2005 >
	255/50R19	103 W (MO)	P ZERO ROSSO	1521700	2012 >
	265/45R20 XL	108 H (MO)	SCORPION VERDE ALLSEASON	1954300	2005 >
	255/50R19	103 W (MO)	P ZERO ROSSO	1521700	2012 >
GLK	235/45R20 XL	100 W (MO) Front	P ZERO	1767300	2008 >
	255/40R20 XL	101 W (MO) Rear	P ZERO	1767400	2012 >
	235/50R19	99 W (MO) Front	P ZERO	1767100	2008 >
	255/45R19	100 W (MO) Rear	P ZERO	1767200	2012 >
	235/45R19 XL	100 H (MO)	SCORPION ZERO ASIMMETRICO	1788400	2008 >
	235/60R17	102 V (MO) Front / AA	SCORPION ZERO ASIMMETRICO	1766900	2012 >
	255/55R17	104 V (MO) Rear	SCORPION ZERO ASIMMETRICO	1767000	2008 >
	235/60R17	102 V (MO)	SCORPION VERDE	2076900	2012 >
G CLASS	275/55R19	111 V (MO)	SCORPION ZERO	1560200	2007 >
VIANO	225/55R17 XL	101 W (MO)	CINTURATO P7	1988100	2012 >
<b>WINTER</b>					
GT	265/60R20 XL	98 W (MO) Front	W270 SOTTOZERO SERIE II	1814700	2011 >
	295/30R20 XL	101 W (MO) Rear	W270 SOTTOZERO SERIE II	2116000	2004 >
SL	255/40R18 XL	99 V (MO)	W240 SOTTOZERO SERIE II	1865500	2004 >
	245/45R17 XL	99 H (MO)	W210 SOTTOZERO SERIE II	1817400	2004 >
	255/35R19 XL	96 V (MO) Front / AA	W240 SOTTOZERO SERIE II	1863100	2004 >
	285/30R19 XL	98 V (MO) Rear	W240 SOTTOZERO SERIE II	1898400	2004 >
	265/35R19 XL	98 W (MO) Front	W270 SOTTOZERO SERIE II	1814700	2004 >
SLS	295/30R20 XL	101 W (AMS) Rear	W270 SOTTOZERO SERIE II	1821700	2013 >
	295/30R20 XL	101 W (MO) Rear	W270 SOTTOZERO SERIE II	2116000	2013 >
	255/45R17	98 V (MO)	W240 SOTTOZERO	1705100	2013 >
SL	255/35R19 XL	96 V (MO) Front / AA	W240 SOTTOZERO SERIE II	1863100	2013 >
	285/30R19 XL	98 V (MO) Rear	W240 SOTTOZERO SERIE II	1898400	2013 >
	255/40R19 XL	100 V (MO)	W240 SOTTOZERO	1707600	2013 >
CL	245/40R20 XL	99 V	W240 SOTTOZERO SERIE II	1877800	2013 >
S CLASS	245/45R19 XL	102 V (MO)	WINTER SOTTOZERO 3	2463200	2013 >
	245/45R19 XL	102 V (MOE)	W240 SOTTOZERO SERIE II	2157500	2013 >
	245/55R17	102 V (MO)	W240 SOTTOZERO SERIE II	2157300	2007 - 2013
	255/40R20 XL	101 V (MO) Front	WINTER SOTTOZERO 3	2370800	2007 - 2013
	285/35R20 XL	104 V (MO) Rear	WINTER SOTTOZERO 3	2310900	2007 - 2013
	255/45R19 XL	104 V (MO)	WINTER SOTTOZERO 3	2424400	2007 - 2013
	255/40R19 XL	100 V (MO)	W240 SOTTOZERO	1707600	2007 - 2013
	255/45R18	99 V (MO)	W240 SOTTOZERO	1901100	2007 - 2013
	235/55R17	99 V (MO)	W240 SOTTOZERO	1571400	2007 - 2013
	255/40R19 XL	100 V (MO) Front	W240 SOTTOZERO	1707600	2007 - 2013
	275/40R19 XL	105 V (MO) Rear	W240 SOTTOZERO SERIE II	1863200	2007 - 2013
	255/35R19 XL	96 V (MO) Front	W240 SOTTOZERO SERIE II	1863100	2014 >
	285/30R19 XL	98 V (MO) Rear	W240 SOTTOZERO SERIE II	1898400	2014 >
CLS	245/40R18 XL	97 V (MO)	W240 SOTTOZERO	1558700	2014 >
	245/45R17 XL	99 V (MO)	W240 SOTTOZERO	1690700	2014 >
	245/35R19 XL	93 V (MO)	W240 SOTTOZERO	1862900	2014 >
	245/40R18 XL	97 H (MO)	W210 SOTTOZERO SERIE II	1817600	2014 >
	245/45R17 XL	99 H (MO)	W210 SOTTOZERO SERIE II	1817400	2014 >
E CLASS	255/35R19 XL	96 V (MO) Front	W240 SOTTOZERO SERIE II	1863100	2014 >
	285/30R19 XL	98 V (MO) Rear	W240 SOTTOZERO SERIE II	1898400	2014 >
	255/40R18 XL	99 V (MO)	W240 SOTTOZERO SERIE II	1865500	2007 - 2013
	245/40R18 XL	97 V (MO)	W240 SOTTOZERO	1558700	2007 - 2013
	245/45R17 XL	99 V (MO)	W240 SOTTOZERO	1690700	2007 - 2013
	225/55R16	95 H (AO)(MO)	W210 SOTTOZERO SERIE II	2073000	2007 - 2013
	205/60R16	92 H (AO)(MO)	W210 SOTTOZERO SERIE II	2072900	2007 - 2013
	245/35R19 XL	93 V (MO)	W240 SOTTOZERO	1862900	2007 - 2013
	235/45R17	94 H (MO)	W210 SOTTOZERO	1827400	2007 - 2013
	225/45R17	91 H (MO)	W210 SOTTOZERO SERIE II	2056900	2007 - 2013
SLK	205/55R16	91 H (*) (MO)	W210 SOTTOZERO SERIE II	1952100	2007 - 2013
	235/40R18 XL	95 V (MO) Front	WINTER SOTTOZERO 3	2398000	2010 - 2013
	255/35R18 XL	94 V (MO) Rear	WINTER SOTTOZERO 3	2397900	2010 - 2013
	205/55R16	91 H (*) (MO)	W210 SOTTOZERO SERIE II	1952100	2010 - 2013
C CLASS	245/45R18	95 H (MO)	WINTER SOTTOZERO 3	2544800	2010 - 2013
	225/45R18 XL	95 H (MOE)	W210 SOTTOZERO SERIE II	2414000	2010 - 2013
	225/55R16 XL	95 H (MOE)	W210 SOTTOZERO SERIE II	2414100	2010 - 2013
	225/45R17	91 H (MO)	W210 SOTTOZERO SERIE II	2056900	2010 - 2013
	205/55R16	91 H (*) (MO)	W210 SOTTOZERO SERIE II	1952100	2010 - 2013
	195/60R16	89 H (MO)	W210 SOTTOZERO	1691600	2010 - 2013
	255/35R19 XL	96 V (MO) Front	W240 SOTTOZERO SERIE II	1863100	2010 - 2013
	285/30R19 XL	98 V (MO) Rear	W240 SOTTOZERO SERIE II	1898400	2010 - 2013
CLA	235/40R18 XL	95 V (MO)	WINTER SOTTOZERO 3	2398000	2010 - 2013
	205/50R17 XL	93 H (MOE)	W210 SOTTOZERO SERIE II	1919800	2010 - 2013
	205/50R17 XL	93 H (MO)	W210 SOTTOZERO SERIE II	1957200	2010 - 2013
	235/40R18 XL	95 V (MO)	WINTER SOTTOZERO 3	2398000	2010 - 2013
	215/45R18 XL	93 V (MO)	W240 SOTTOZERO SERIE II	2285200	2010 - 2013
	205/50R17 XL	93 H (MOE)	W210 SOTTOZERO SERIE II	1919800	2003 - 2010
B CLASS	205/50R17 XL	93 H (MO)	W210 SOTTOZERO SERIE II	1957200	2003 - 2010

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>MERCEDES (CONT.)</b>					
<b>WINTER</b>					
A CLASS	205/50R17 XL	93 H (MOE)	W210 SOTTOZERO SERIE II	1919800	2003 - 2010
	205/50R17 XL	93 H (MO)	W210 SOTTOZERO SERIE II	1957200	2003 - 2010
	235/40R18 XL	95 V (MO)	WINTER SOTTOZERO 3	2398000	2009 >
	215/45R18 XL	93 V (MO)	W240 SOTTOZERO SERIE II	2285200	2009 >
	195/60R16	89 H (MO)	W210 SOTTOZERO	1691600	2009 >
	195/55R16	87 H (MO)	W210 SOTTOZERO	1630500	2009 >
	185/65R15	88 T (MO)	W190 SNOWCONTROL SERIE II	2056100	2009 >
GLA CLASS	235/45R19 XL	99 V (MO)	WINTER SOTTOZERO 3	2428100	2009 >
	215/55R18 XL	99 V (MO)	WINTER SOTTOZERO 3	2428000	2009 >
	235/50R18 XL	101 V (MO)	SCORPION WINTER	2492800	2009 >
GL CLASS	275/50R20	109 V (MO)	SCORPION WINTER	2440600	2009 >
	275/50R20	109 H (MO)	SCORPION ICE & SNOW	1928600	2009 >
	275/45R20 XL	110 V (MO)	SCORPION WINTER	2285300	2009 >
	265/55R19	109 V (MO)	SCORPION ICE & SNOW	1709200	2008 >
ML CLASS	265/45R20 XL	108 V (MO)	SCORPION WINTER	2179900	2008 >
	275/55R17	109 H	SCORPION ICE & SNOW	1219600	2008 >
	295/35R21 XL	107 V (MO)	SCORPION WINTER	2298400	2009 >
	295/35R21 XL	107 V (MO)	SCORPION ICE & SNOW	2294000	2009 >
	255/50R19 XL	107 H (MO)	SCORPION ICE & SNOW	1622000	2009 >
	255/55R18 XL	109 H (MO)	SCORPION ICE & SNOW	1621900	2012 >
	235/65R17 XL	108 H (MO)(NO)	SCORPION ICE & SNOW	1625700	2012 >
R CLASS	255/50R19 XL	107 H (MO)	SCORPION ICE & SNOW	1622000	2012 >
	255/55R18 XL	109 H (MO)	SCORPION ICE & SNOW	1621900	2010 >
	235/65R17 XL	108 H (MO)(NO)	SCORPION ICE & SNOW	1625700	2013 >
GLK	235/50R19	99 H (MO)	W210 SOTTOZERO SERIE II	1928500	2013 >
	235/60R17	102 H (MO)	SCORPION ICE & SNOW	1767500	2013 >
VIANO	225/55R17 XL	101 V (MO)	W240 SOTTOZERO SERIE II	1971400	2012 >
<b>PAGANI</b>					
HUAYARA	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2012 >
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2012 >
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2012 >
	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2012 >
ZONDA CINQUE ROADSTER	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2012 >
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2012 >
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2012 >
ZONDA CINQUE	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2012 >
	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2012 >
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2012 >
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2007 >
ZONDA TRICOLORE	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2007 >
	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2006 - 2011
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2006 - 2011
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2006 - 2011
ZONDA R	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2006 - 2011
	255/35ZR19 XL	(96 Y) (AM8) Front	P ZERO CORSA DIREZIONALE	1789300	2006 - 2011
	335/30ZR20	(104 Y) (AMP) Rear	P ZERO CORSA ASIMMETRICO 2	1949300	2006 - 2011
	255/35ZR19 XL	(96 Y) (L) Front	P ZERO	1997200	2006 - 2011
PORSCH	335/30ZR20	(104 Y) (L) Rear	P ZERO	1800300	2006 - 2011
	255/40ZR20 XL	(101 Y) (N1) Front	P ZERO	2315300	2006 - 2011
	295/35ZR20 XL	(105 Y) (N1) Rear	P ZERO	2315200	2006 - 2011
	255/45ZR19	(100 Y) (N1) Front	P ZERO	2315500	1999 - 2006
	285/40ZR19	(103 Y) (N1) Rear	P ZERO	2315400	1999 - 2006
	245/50ZR18	(100 Y) (N1) Front	P ZERO	2315700	2014 >
	275/45ZR18	(103 Y) (N1) Rear	P ZERO	2315600	2013 >
	255/40R20 XL	101 V (NO) Front	CINTURATO P7 ALLSEASON	2128400	2011 >
	295/35R20 XL	105 V (NO) Rear	CINTURATO P7 ALLSEASON	2128500	2011 >
	255/45R19	100 V (NO) Front	CINTURATO P7 ALLSEASON	2157100	2011 >
	285/40R19	103 V (NO) Rear	CINTURATO P7 ALLSEASON	2157200	2011 >
	255/40ZR20 XL	(101 Y) (NO) Front	P ZERO	1766500	2011 >
	295/35ZR20 XL	(105 Y) (NO) Rear	P ZERO	1766700	2011 >
	255/45ZR19	(100 Y) (NO) Front	P ZERO	1918900	2011 >
	285/40ZR19	(103 Y) (NO) Rear	P ZERO	1919000	2011 >
	245/50ZR18	(100 Y) (NO) Front	P ZERO	1766400	2011 >
	275/45ZR18	(103 Y) (NO) Rear	P ZERO	1766600	2011 >
	255/40R20 XL	101 V (NO) Front	CINTURATO P7 ALLSEASON	2128400	2004 >
	295/35R20 XL	105 V (NO) Rear	CINTURATO P7 ALLSEASON	2128500	2004 >
	255/45R19	100 V (NO) Front	CINTURATO P7 ALLSEASON	2157100	2004 >
285/40R19	103 V (NO) Rear	CINTURATO P7 ALLSEASON	2157200	2004 >	
911	235/35ZR19 XL	(91 Y) (N1) Front	P ZERO CORSA DIREZIONALE	1911300	2004 >
	305/30ZR19 XL	(102 Y) (N1) Rear	P ZERO CORSA ASIMMETRICO 2	1939100	2004 >
	235/35ZR19 XL	(91 Y) (N1) Front	P ZERO CORSA DIREZIONALE	1911300	2013 >
	305/30ZR19 XL	(102 Y) (N1) Rear	P ZERO CORSA ASIMMETRICO 2	1939100	2013 >
	245/35ZR20	(91 Y) (NO) Front	P ZERO	1929000	2013 >
305/30ZR20 XL	(103 Y) (NO) Rear	P ZERO	2059500	2012 >	

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE	
<b>PORSCHE (CONT.)</b>						
911 (CONT.)	235/35ZR19	(87 Y) (N2) Front	P ZERO	1737700	2012 >	
	295/30ZR19 XL	(100 Y) (N2) Rear	P ZERO	1737800	2012 >	
	305/30ZR19 XL	(102 Y) (N2) Rear	P ZERO	1737900	2012 >	
CAYMAN	235/35ZR20	(88 Y) (N0) Front	P ZERO	1928800	2007 >	
	265/35ZR20	(95 Y) (N0) Rear	P ZERO	1928900	2007 >	
	235/40ZR19	(92 Y) (N0) Front	P ZERO	1958000	2006 - 2011	
	265/40ZR19	(98 Y) (N0) Rear	P ZERO	1957900	2006 - 2011	
BOXSTER	235/35ZR20	(88 Y) (N0) Front	P ZERO	1928800	2006 - 2011	
	265/35ZR20	(95 Y) (N0) Rear	P ZERO	1928900	2006 - 2011	
	235/40ZR19	(92 Y) (N0) Front	P ZERO	1958000	2006 - 2011	
	265/40ZR19	(98 Y) (N0) Rear	P ZERO	1957900	2006 - 2011	
	235/35ZR19	(87 Y) (N2) Front	P ZERO	1737700	2006 - 2011	
	265/35ZR19	(94 Y) (N2) Rear	P ZERO	1787200	2006 - 2011	
911	235/40ZR18	(N4) Front	P ZERO ROSSO	1836300	2006 - 2011	
	315/30ZR18	(N4) Rear	P ZERO ROSSO	1839200	2006 - 2011	
	235/40ZR18	(N4) Front	P ZERO ROSSO	1836300	2006 - 2011	
	295/30ZR18 XL	(N4) Rear	P ZERO ROSSO	1836400	1999 - 2006	
	225/40ZR18	(N4) Front	P ZERO ROSSO	0985500	1999 - 2006	
	265/35ZR18	(N4) Rear	P ZERO ROSSO	0985900	2014 >	
	205/50ZR17	(N3) Front	P ZERO ROSSO	0984300	2013 >	
	255/40ZR17	(N3) Rear	P ZERO ROSSO	0985700	2011 >	
	225/40ZR18	(N4) Front	P ZERO ROSSO	0985500	2011 >	
	295/30ZR18 XL	(N4) Rear	P ZERO ROSSO	1836400	2011 >	
	225/40ZR18	(N4) Front	P ZERO ROSSO	0985500	2011 >	
	265/35ZR18	(N4) Rear	P ZERO ROSSO	0985900	2011 >	
	285/30ZR18	(N4) Rear	P ZERO ROSSO	1216400	2011 >	
	205/50ZR17	(N3) Front	P ZERO ROSSO	0984300	2011 >	
	255/40ZR17	(N3) Rear	P ZERO ROSSO	0985700	2011 >	
	225/40ZR18	(N4) Front	P ZERO ROSSO	0985500	2011 >	
	BOXSTER	265/35ZR18	(N4) Rear	P ZERO ROSSO	0985900	2011 >
		205/50ZR17	(N3) Front	P ZERO ROSSO	0984300	2004 >
255/40ZR17		(N3) Rear	P ZERO ROSSO	0985700	2004 >	
205/55ZR16		(N3) Front	P ZERO DIREZIONALE	1065300	2004 >	
225/50ZR16		(N3) Rear	P ZERO ASIMMETRICO	1074000	2004 >	
968	265/35ZR18	(N4) Rear	P ZERO ROSSO	0985900	2004 >	
	235/40ZR18	(N4) Front	P ZERO ROSSO	1836300	2004 >	
911	225/40ZR18	(N4) Front	P ZERO ROSSO	0985500	2013 >	
	265/35ZR18	(N4) Rear	P ZERO ROSSO	0985900	2013 >	
	205/50ZR17	(N3) Front	P ZERO ROSSO	0984300	2013 >	
	255/40ZR17	(N3) Rear	P ZERO ROSSO	0985700	2012 >	
914 / 924 / 928 / 944 / 911 / 912 / 964	205/55ZR16	(N3) Front	P ZERO DIREZIONALE	1065300	2012 >	
	225/50ZR16	(N3) Rear	P ZERO ASIMMETRICO	1074000	2012 >	
914 / 924 / 928 / 944 / 911 / 912	185/70R15	89 W (N2) Front	P6000	2134800	2012 >	
	215/60R15	94 W (N2) Rear	P6000	2201500	2012 >	
	195/65R15	91 W (N2) Front	P6000	2201400	2012 >	
	215/60R15	94 W (N2) Rear	P6000	2201500	2012 >	
	295/35R21 XL	107 Y (N1)	P ZERO	2049400	2012 >	
CAYENNE	265/50R19 XL	110 Y (N0)	P ZERO	1804000	2012 >	
	275/45R20 XL	110 V (N0)	SCORPION VERDE ALLSEASON	1806100	2012 >	
	265/50R19 XL	110 V (N0)	SCORPION VERDE ALLSEASON	1805000	2012 >	
	295/35ZR21 XL	107 Y (N0)	P ZERO ROSSO	1613200	2012 >	
	295/35R21 XL	107 Y (N1)	P ZERO	2049400	2007 >	
	275/40ZR20 XL	106 Y (N1)	P ZERO ROSSO	1688500	2007 >	
	275/45ZR19 XL	108 Y (N1)	P ZERO ROSSO	1688600	2006 - 2011	
	255/55ZR18 XL	109 Y (N0)	P ZERO ROSSO	1363000	2006 - 2011	
	255/55R18 XL	109 V (N0)	SCORPION ZERO	1417600	2006 - 2011	
	265/40R21	101 Y (N0) Front	P ZERO	2205800	2006 - 2011	
MACAN	295/35R21	103 Y (N0) Rear	P ZERO	2205700	2006 - 2011	
	265/45R20	104 Y (N0) Front	P ZERO	2206000	2006 - 2011	
	295/40R20	106 Y (N0) Rear	P ZERO	2205900	2006 - 2011	
	235/55R19	101 Y (N0) Front / AA	SCORPION VERDE	2205400	2006 - 2011	
	255/50R19	103 Y (N0) Rear	SCORPION VERDE	2205300	2006 - 2011	
	235/60R18	103 W (N0) Front / AA	SCORPION VERDE	2494300	2006 - 2011	
	255/55R18	105 W (N0) Rear	SCORPION VERDE	2494200	2006 - 2011	
	265/45R20	104V (N0) Front	SCORPION VERDE ALLSEASON	2204800	2013 >	
	295/40R20	106V (N0) Rear	SCORPION VERDE ALLSEASON	2204700	2013 >	
	235/55R19	101V (N0) Front	SCORPION VERDE ALLSEASON	2205000	2013 >	
	255/50R19	103V (N0) Rear	SCORPION VERDE ALLSEASON	2204900	2013 >	
	235/60R18	103V (N0) Front	SCORPION VERDE ALLSEASON	2205200	2013 >	
	255/55R18	105V (N0) Rear	SCORPION VERDE ALLSEASON	2205100	2013 >	
	<b>WINTER</b>					
PANAMERA	255/40R20 XL	101 V (N1) Front	W240 SOTTOZERO SERIE II	2391200	2014 >	
	285/35R20 XL	104 V (N1) Rear	W240 SOTTOZERO SERIE II	2391300	2013 >	
	255/45R19	100 V (N0) Front	W240 SOTTOZERO SERIE II	2391000	2011 >	
	285/40R19	103 V (N0) Rear	W240 SOTTOZERO SERIE II	2391100	2011 >	
	245/50R18	100 V (N0) Front	W240 SOTTOZERO SERIE II	1840900	2011 >	
	275/45R18	103 V (N0) Rear	W240 SOTTOZERO SERIE II	1841000	2011 >	

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>PORSCHE (CONT.)</b>					
<b>WINTER</b>					
PANAMERA	255/40R20 XL	101 V (NO) Front	W240 SOTTOZERO SERIE II	1848900	2011 >
	285/35R20 XL	104 V (NO) Rear	W240 SOTTOZERO SERIE II	1848800	2011 >
	255/45R19	100 V (NO) Front	W240 SOTTOZERO SERIE II	2391000	2011 >
	285/40R19	103 V (NO) Rear	W240 SOTTOZERO SERIE II	2391100	2011 >
	245/50R18	100 V (NO) Front	W240 SOTTOZERO SERIE II	1840900	2011 >
	275/45R18	103 V (NO) Rear	W240 SOTTOZERO SERIE II	1841000	2011 >
	255/40R20 XL	101 V (N1) Front	W240 SOTTOZERO SERIE II	2391200	2014 >
	285/35R20 XL	104 V (N1) Rear	W240 SOTTOZERO SERIE II	2391300	2013 >
	255/45R19	100 V (NO) Front	W240 SOTTOZERO SERIE II	2391000	2011 >
	285/40R19	103 V (NO) Rear	W240 SOTTOZERO SERIE II	2391100	2011 >
	245/50R18	100 V (NO) Front	W240 SOTTOZERO SERIE II	1840900	2011 >
	275/45R18	103 V (NO) Rear	W240 SOTTOZERO SERIE II	1841000	2011 >
	255/40R20 XL	101 V (NO) Front	W240 SOTTOZERO SERIE II	1848900	2011 >
	285/35R20 XL	104 V (NO) Rear	W240 SOTTOZERO SERIE II	1848800	2011 >
	255/45R19	100 V (NO) Front	W240 SOTTOZERO SERIE II	2391000	2011 >
	285/40R19	103 V (NO) Rear	W240 SOTTOZERO SERIE II	2391100	2011 >
	245/50R18	100 V (NO) Front	W240 SOTTOZERO SERIE II	1840900	2011 >
	275/45R18	103 V (NO) Rear	W240 SOTTOZERO SERIE II	1841000	2011 >
	245/35R20	91 V (NO) Front	W240 SOTTOZERO SERIE II	1864700	2004 >
	295/30R20	97 V (NO) Rear	W240 SOTTOZERO SERIE II	1864300	2004 >
	235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2004 >
	295/30R19 XL	100 V (N1) Rear	W240 SOTTOZERO SERIE II	1822200	2004 >
	235/40R18	91 V (N2) Front	W240 SOTTOZERO SERIE II	1850000	2004 >
	295/35R18	99 V (N2) Rear	W240 SOTTOZERO SERIE II	1850200	2004 >
	235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2013 >
	295/30R19 XL	100 V (N1) Rear	W240 SOTTOZERO SERIE II	1822200	2013 >
	235/40R18	91 V (N2) Front	W240 SOTTOZERO SERIE II	1850000	2013 >
295/35R18	99 V (N2) Rear	W240 SOTTOZERO SERIE II	1850200	2012 >	
235/40R19	92 V (NO) Front	W240 SOTTOZERO SERIE II	1864500	2012 >	
285/35R19	99 V (NO) Rear	W240 SOTTOZERO SERIE II	1931600	2012 >	
295/35R19	100 V (NO) Rear	W240 SOTTOZERO SERIE II	1864400	2012 >	
245/35R20	91 V (NO) Front	W240 SOTTOZERO SERIE II	1864700	2012 >	
295/30R20	97 V (NO) Rear	W240 SOTTOZERO SERIE II	1864300	2012 >	
235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2012 >	
295/30R19 XL	100 V (N1) Rear	W240 SOTTOZERO SERIE II	1822200	2012 >	
235/40R18	91 V (N2) Front	W240 SOTTOZERO SERIE II	1850000	2012 >	
295/35R18	99 V (N2) Rear	W240 SOTTOZERO SERIE II	1850200	2012 >	
235/40R18	91 V (N1) Front	W240 SOTTOZERO SERIE II	1821900	2012 >	
265/40R18	97 V (N1) Rear	W240 SOTTOZERO SERIE II	1822100	2012 >	
235/35R19	87 V (N1) Front	W240 SOTTOZERO SERIE II	1821800	2007 >	
295/30R19 XL	100 V (N1) Rear	W240 SOTTOZERO SERIE II	1822200	2007 >	
235/40R18	91 V (N2) Front	W240 SOTTOZERO SERIE II	1850000	2006 - 2011	
295/35R18	99 V (N2) Rear	W240 SOTTOZERO SERIE II	1850200	2006 - 2011	
235/40R18	91 V (N1) Front	W240 SOTTOZERO SERIE II	1821900	2006 - 2011	
265/40R18	97 V (N1) Rear	W240 SOTTOZERO SERIE II	1822100	2006 - 2011	
235/45R18	94 V (NO) Front	W240 SOTTOZERO SERIE II	1864600	2006 - 2011	
CAYMAN	265/45R18	101 V (NO) Rear	W240 SOTTOZERO SERIE II	1864800	2006 - 2011
	235/45R18	94 V (NO) Front	W240 SOTTOZERO SERIE II	1864600	2006 - 2011
	265/45R18	101 V (NO) Rear	W240 SOTTOZERO SERIE II	1864800	2006 - 2011
BOXSTER	235/40R18	91 V (N1) Front	W240 SOTTOZERO SERIE II	1821900	2006 - 2011
	255/40R18	95 V (N1) Rear	W240 SOTTOZERO SERIE II	1822000	2006 - 2011
	205/55R17	91 V (NO) Front	W240 SOTTOZERO SERIE II	1822400	2006 - 2011
	235/50R17	96 V (NO) Rear	W240 SOTTOZERO SERIE II	1822500	1999 - 2006
911	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	1999 - 2006
	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2014 >
	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	2013 >
	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2011 >
BOXSTER	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	2011 >
	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2011 >
	205/55R16 XL	94 V (N1) Front	W240 SOTTOZERO SERIE II	2027800	2011 >
911	225/50R16 XL	96 V (N1) Rear	W240 SOTTOZERO SERIE II	2023600	2011 >
	225/40R18 XL	92 V (N3) Front	W240 SNOWSPORT	1528200	2011 >
914 / 924 / 928 / 944 / 911 / 912 / 964	265/35R18 XL	97 V (N3) Rear	W240 SNOWSPORT	1528100	2011 >
	205/55R16 XL	94 V (N1) Front	W240 SOTTOZERO SERIE II	2027800	2011 >
	225/50R16 XL	96 V (N1) Rear	W240 SOTTOZERO SERIE II	2023600	2011 >
	275/45R20 XL	110 V (MO)(NO)	SCORPION ICE & SNOW	1938900	2011 >
	265/50R19 XL	110 V (NO)	SCORPION WINTER	2287400	2004 >
	265/50R19 XL	110 V (NO)	SCORPION ICE & SNOW	1806400	2004 >
	255/55R18 XL	109 V (N1)	SCORPION ICE & SNOW	1939000	2004 >
	275/45R20 XL	110 T	CARVING EDGE	1835500	2004 >
	275/40R20 XL	106 V (NO)	SCORPION ICE & SNOW	1776500	2004 >
	275/40R20 XL	106 V (NO)	SCORPION ICE & SNOW	1776500	2004 >
CAYENNE	255/50R19 XL	107 V (NO)	SCORPION ICE & SNOW	1504400	2013 >
	235/60R18 XL	107 H (NO)	SCORPION ICE & SNOW	1526800	2013 >
	235/65R17 XL	108 H (MO)(NO)	SCORPION ICE & SNOW	1625700	2013 >
	265/45R20	104 V (NO) Front	SCORPION WINTER	2204000	2012 >
	295/40R20	106 V (NO) Rear	SCORPION WINTER	2203900	2012 >
	235/55R19	101 V (NO) Front / AA	SCORPION WINTER	2273400	2012 >
	255/50R19	103 V (NO) Rear	SCORPION WINTER	2274100	2012 >
	235/60R18	103 V (NO) Front / AA	SCORPION WINTER	2273100	2012 >
MACAN	255/55R18	105 V (NO) Rear	SCORPION WINTER	2273800	2012 >

# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>SAAB</b>					
SAAB 9-3	P225/45R17 XL	94 V	P6 FOURSEASONS	1536600	2012 >
	P215/55R16 XL	97 H	P6 FOURSEASONS	1984500	2012 >
SAAB 9-5	P235/45R17	94 V	P6 FOURSEASONS	1586700	2012 >
<b>SALEEN</b>					
S281 E	265/35ZR18	(N4)	P ZERO ROSSO	0985900	2011 >
	295/35ZR18	99 Y	P ZERO ROSSO	1118700	2011 >
<b>VOLVO</b>					
S80	245/40ZR18 XL	97 Y	P ZERO ROSSO	1811300	2011 >
	P225/50R17	94 V Runflat	P ZERO NERO AS	1650300	2004 >
	245/40R18 XL	97 V	CINTURATO P7 ALLSEASON	2038100	2004 >
	245/40R18 XL	97 V	P6 FOURSEASONS	1770900	2004 >
V70	245/40ZR18 XL	97 Y	P ZERO ROSSO	1811300	2004 >
	P225/50R17	94 V Runflat	P ZERO NERO AS	1650300	2004 >
C70	245/40R18 XL	97 V	CINTURATO P7 ALLSEASON	2038100	2004 >
	235/40ZR18	91 Y	P ZERO ROSSO	1637700	2013 >
V60	235/45R17	94 W	P7	1624600	2013 >
	P225/45R17 XL	94 V	P6 FOURSEASONS	1536600	2013 >
	235/45R17 XL	97 W	CINTURATO P7	2413900	2013 >
	215/50R17 XL	95 W	CINTURATO P7	2332200	2013 >
S60	235/40R19 XL	96 V	CINTURATO P7 ALLSEASON	2324400	2013 >
	235/45R18 XL	98 V	CINTURATO P7 ALLSEASON	2324500	2013 >
	235/45R17 XL	97 W	CINTURATO P7	2413900	2013 >
	215/50R17 XL	95 W	CINTURATO P7	2332200	2013 >
V70	235/40R19 XL	96 V	CINTURATO P7 ALLSEASON	2324400	2007 - 2013
	235/45R18 XL	98 V	CINTURATO P7 ALLSEASON	2324500	2007 - 2013
S60	205/55R16	91 W (AO)	P7	1180000	2007 - 2013
	P235/45R17	94 V	P6 FOURSEASONS	1586700	2007 - 2013
V40 CC	205/55R16	91 W (AO)	P7	1180000	2007 - 2013
	225/45R18 XL	95 W	P ZERO	2202300	2007 - 2013
V40	225/45R18 XL	95 W	CINTURATO P7	2392800	2007 - 2013
	225/45R17	91 W	CINTURATO P7	2259700	2007 - 2013
S40	205/50R17 XL	93 W	CINTURATO P7	2487000	2014 >
	205/55R16	91 W (AO)	P7	1180000	2014 >
V50	215/45R18 XL	93 W	P ZERO NERO AS	1566500	2014 >
	205/55R16	91 W (AO)	P7	1180000	2014 >
S40	215/45R18 XL	93 W	P ZERO NERO AS	1566500	2014 >
	205/55R16	91 W (AO)	P7	1180000	2014 >
C30	205/55R16	91 W (AO)	P7	1180000	2014 >
	215/45R18 XL	93 W	P ZERO NERO AS	1566500	2014 >
XC90	235/60R18	103 H	SCORPION VERDE ALLSEASON	1916600	2014 >
	255/45R20 XL	105 V	SCORPION ZERO ASIMMETRICO	1825300	2007 - 2013
	255/50R19	103 W	P ZERO ROSSO	2127400	2007 - 2013
	255/50R19	103 W (MO)	P ZERO ROSSO	1521700	2007 - 2013
XC70	255/50ZR19 XL	107 Y	SCORPION ZERO ASIMMETRICO	1619700	2007 - 2013
	235/60R18	103 H	SCORPION ZERO ASIMMETRICO	1755800	2007 - 2013
	235/45R19 XL	99 V	SCORPION ZERO ASIMMETRICO	1754300	2007 - 2013
	235/50R18	97 V	SCORPION ZERO ASIMMETRICO	1722400	2007 - 2013
XC60	235/55R17	99 V	SCORPION ZERO ASIMMETRICO	1722300	2007 - 2013
	235/50R18	97 V	SCORPION VERDE ALLSEASON	1953400	2007 - 2013
	215/65R16	98 V	SCORPION VERDE ALLSEASON	1953500	2010 - 2013
	235/60R18	103 V	SCORPION VERDE	1916300	2010 - 2013
XC60	235/60R18	103 V	P ZERO ROSSO	1707900	2010 - 2013
	235/65R17 XL	108 V	SCORPION VERDE	1805900	2010 - 2013
	255/45R20 XL	105 V	SCORPION ZERO ASIMMETRICO	1825300	2010 - 2013
	235/60R18	103 H	SCORPION ZERO ASIMMETRICO	1755800	2010 - 2013
XC60	235/65R17	104 H	SCORPION ZERO ASIMMETRICO	1820600	2010 - 2013
	235/60R18	103 H	SCORPION VERDE ALLSEASON	1916600	2010 - 2013
<b>WINTER</b>					
S80	225/50R17 XL	98 V	WINTER SOTTOZERO 3	2192400	2010 - 2013
	225/55R16 XL	99 V	WINTER SOTTOZERO 3	2352500	2010 - 2013
V70	225/50R17 XL	98 V	WINTER SOTTOZERO 3	2192400	2010 - 2013
	225/55R16 XL	99 V	WINTER SOTTOZERO 3	2352500	2010 - 2013
V60	235/40R18 XL	95 V	WINTER SOTTOZERO 3	2351700	2010 - 2013
	205/50R17 XL	93 V	WINTER SOTTOZERO 3	2350400	2010 - 2013
	215/50R17 XL	95 V	WINTER SOTTOZERO 3	2350600	2010 - 2013
	215/55R16 XL	97 H	WINTER SOTTOZERO 3	2192300	2010 - 2013
S60	205/60R16 XL	96 H	WINTER SOTTOZERO 3	2529200	2003 - 2010
	205/60R16 XL	96 H	W210 SOTTOZERO SERIE II	1882200	2003 - 2010
	235/40R18 XL	95 V	WINTER SOTTOZERO 3	2351700	2003 - 2010
	215/50R17 XL	95 V	WINTER SOTTOZERO 3	2350600	2003 - 2010
V40 CC	215/55R16 XL	97 H	WINTER SOTTOZERO 3	2192300	2009 >
	205/50R17 XL	93 V	WINTER SOTTOZERO 3	2350400	2009 >
	205/60R16 XL	96 H	WINTER SOTTOZERO 3	2529200	2009 >
	205/60R16 XL	96 H	W210 SOTTOZERO SERIE II	1882200	2009 >
V40	225/45R18 XL	95 V	WINTER SOTTOZERO 3	2351100	2009 >
	225/40R18 XL	92 V	WINTER SOTTOZERO 3	2351000	2009 >
V40	205/55R16	91 H	W.SNOWCONTROL S.3	2123800	2009 >
	195/65R15	91 T	W.SNOWCONTROL S.3	2124900	2009 >



# ORIGINAL EQUIPMENT-HOMOLOGATION

BRAND / MODEL	SIZE	LI/SR	PATTERN	IP CODE	YEAR RANGE
<b>VOLVO (CONT.)</b>					
XC90	255/45R20 XL	105 V	SCORPION WINTER	2179500	2009 >
	255/50R19 XL	107 V	SCORPION WINTER	2274000	2009 >
	235/60R18 XL	107 H	SCORPION WINTER	2273000	2009 >
	235/60R18 XL	107 H (NO)	SCORPION ICE & SNOW	1526800	2008 >
<b>WINTER</b>					
XC70	215/65R16	98 H (AO)	W210 SOTTOZERO SERIE II	2075400	2008 >
XC60	255/45R20 XL	105 V	SCORPION WINTER	2179500	2008 >
	235/55R19 XL	105 H	SCORPION WINTER	2414700	2009 >
	235/60R18 XL	107 H	SCORPION WINTER	2273000	2009 >
	235/60R18 XL	107 H (NO)	SCORPION ICE & SNOW	1526800	2009 >
<b>VOLKSWAGEN</b>					
PHAETON	275/35ZR20 XL	(102 Y) (R01)	P ZERO	2475000	2012 >
	255/40ZR19 XL	100 Y	P ZERO ROSSO	1445300	2012 >
	235/40R19 XL	96 W	CINTURATO P7	2419200	2010 >
PASSAT	215/55R17	94 W	CINTURATO P7	2419500	2013 >
	215/55R17	94 V	CINTURATO P7	2419400	2013 >
	235/35ZR19 XL	(91 Y)	P ZERO	1768200	2013 >
	215/55R16 XL	97 W	CINTURATO P7	1933000	2012 >
	235/40R18 XL	95 H	P6 FOURSEASONS	1621100	2012 >
	235/35ZR19 XL	(91 Y)	P ZERO	1768200	2012 >
SCIROCCO	235/40R18 XL	95 W	CINTURATO P7	1999900	2012 >
	235/45R17	94 W	CINTURATO P7	2001700	2012 >
	225/45R17	91 W (MO)	P ZERO ROSSO	1504100	2012 >
	225/45R17	91 W	CINTURATO P7	2259700	2012 >
GOLF	225/40R18 XL	92 H	CINTURATO P7 ALLSEASON	2345400	2012 >
	225/45R17	91 H	CINTURATO P7 ALLSEASON	2419600	2012 >
	225/35R19 XL	88 Y	P ZERO	2050800	2012 >
	225/45R17	91 W (MO)	P ZERO ROSSO	1504100	2012 >
	205/55R16	91 W (AO)	P7	1180000	2012 >
	225/40R18 XL	92 H	P ZERO NERO AS	1696500	2007 >
	225/40ZR18 XL	92 Y (MO)	P ZERO	1679700	2007 >
	225/40R18 XL	92 H	P ZERO NERO AS	1696500	2006 - 2011
	225/45R17	91 W (MO)	P ZERO ROSSO	1504100	2006 - 2011
	205/55R16	91 W (AO)	P7	1180000	2006 - 2011
	225/40R18 XL	92 H	P ZERO NERO AS	1696500	2006 - 2011
	EOS	225/45R17	91 Y	P6000	1087500
235/35ZR19 XL		(91 Y)	P ZERO	1768200	2006 - 2011
JETTA	215/55R16 XL	97 W	CINTURATO P7	1933000	2006 - 2011
	225/45R17	91 W (MO)	P ZERO ROSSO	1504100	2006 - 2011
NEW BEETLE	205/55R16	91 W (AO)	P7	1180000	2006 - 2011
	225/45R17	91 Y	P6000	1087500	2006 - 2011
TOUAREG	275/40R21 XL	107 Y	SCORPION VERDE	2298900	2006 - 2011
	275/45R20 XL	110 W	SCORPION VERDE	2468500	1999 - 2006
	265/50R19 XL	110 W	SCORPION VERDE	2468600	1999 - 2006
	275/45R20 XL	110 W	SCORPION VERDE	1805800	2014 >
	265/50R19 XL	110 W	SCORPION VERDE	1805700	2013 >
	255/55R18 XL	109 W	SCORPION VERDE	1806000	2011 >
	235/65R17 XL	108 V	SCORPION VERDE	1805900	2011 >
	255/60R17	106 V	SCORPION VERDE	1804900	2011 >
	275/45R20 XL	110 H	SCORPION VERDE ALLSEASON	1939900	2011 >
	265/50R19 XL	110 H	SCORPION VERDE ALLSEASON	1805100	2011 >
	255/55R18 XL	109 H	SCORPION VERDE ALLSEASON	1806300	2011 >
	295/35ZR21 XL	107 Y (NO)	P ZERO ROSSO	1613200	2011 >
	275/40ZR20 XL	106 Y (N1)	P ZERO ROSSO	1688500	2011 >
	275/45ZR19 XL	108 Y (N1)	P ZERO ROSSO	1688600	2011 >
	P255/60R17	106 H (VO)	SCORPION STR	1724600	2011 >
	255/55ZR18 XL	109 Y (NO)	P ZERO ROSSO	1363000	2004 >
	255/55R18 XL	109 V (NO)	SCORPION ZERO	1417600	2004 >
TIGUAN	255/40ZR19	96 W	P ZERO	1949100	2004 >
	255/40R19	96 H	SCORPION VERDE ALLSEASON	1863900	2004 >
	235/50R18	97 H	SCORPION ZERO ASIMMETRICO	1787100	2004 >
	215/65R16	98 H	SCORPION STR	1394300	2004 >
<b>WINTER</b>					
PASSAT	215/55R17	94 H	WINTER SOTTOZERO 3	2445100	2013 >
	215/60R16	95 H	WINTER SOTTOZERO 3	2445000	2013 >
GOLF	225/40R18 XL	92 V (AO)	WINTER SOTTOZERO 3	2414400	2012 >
	225/40R18 XL	92 H	WINTER SOTTOZERO 3	2554100	2012 >
TOUAREG	235/65R17 XL	108 H (MO)(NO)	SCORPION ICE & SNOW	1625700	2012 >
	255/50R19 XL	107 V (NO)	SCORPION ICE & SNOW	1504400	2012 >
TIGUAN	215/65R16	98 H	W210 SOTTOZERO	1656400	2012 >

ALFA ROMEO	AR, ARR	AUDI QUATTRO	R01, R02	LAMBORGHINI	L	MERCEDES	MO	VOLKSWAGEN	VO
ASTON MARTIN	AM8, AM9, AMP, AMR, AMS, AMV, AMX, AM...	BENTLEY	B, B1, BC, BL	LAND ROVER	LR	MERCEDES (AMG)	M01	PIRELLI NOISE CANCELLING SYSTEM	NCS
	BMW / MINI	*	LOTUS	LS	MERCEDES (RUNFLAT)	MOE			
AUDI	AO	FERRARI	F	MASERATI	MGT	PORSCHE	NO, N1, N2, N3... NX	MIRS PRODUCED	(e)
		JAGUAR	J, J1, JRS	MCLAREN	MC, MC1				

# CHOOSE PIRELLI AND TAKE CONTROL.



P ZERO™ SOFT



P ZERO™ MC

**DIFFERENT TIRES, SAME TECHNOLOGY.  
CHOSEN BY FORMULA 1® AND THE BEST CAR MAKERS.  
FOLLOW THEIR LEAD.**



POWER IS NOTHING WITHOUT CONTROL

# PIRELLI TIRE ADVICE

The tire is the ONLY element to make contact between the vehicle and the road. That is why using tires correctly and maintaining them, as well as being aware of their characteristics, are fundamental elements to guaranteeing safety in any situation, increasing your tires' lifespan and in saving money

**Always remember, drive safely while respecting the environment**




If the tread depth on your tires is 2/32" or less, the tires are legally worn out, and must be replaced.



## THE REMAINING TREAD

**Check the treads depth!**

The tread depth should never be less than the legal limit, which is 2/32" for light vehicles such as cars, SUV's and pickup trucks. Performance on wet decreases in proportion to the tread depth.

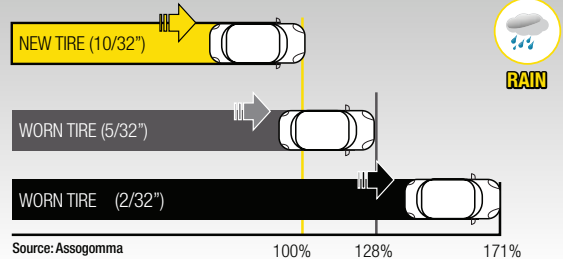


Indicative braking distances on a wet surface based on wear.



## TIRE PRESSURE

**Keep your tires at the correct pressure shown on vehicle placard.**

You should check the pressure regularly, at least once a month, when the tires are cold and always before going on long trips. Tire pressure has a direct influence on your safety. The stopping distance with correctly inflated tires is less than that of an under-inflated tire.

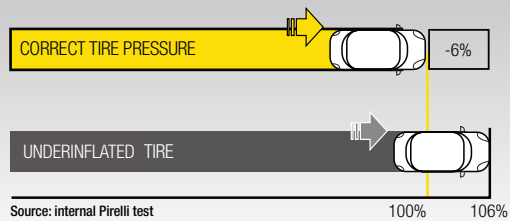

Critical braking distances



## TIRE INTEGRITY

**Check for visible damage!**

Contact with curbs, potholes and other various obstacles can cause damage inside the tire which may not always be immediately evident or visibly noticeable. In this case, ask an expert to check inside the tire. Tires with structural damage are not suitable for driving and must be replaced.





## THE RIGHT TIRE FOR THE RIGHT SEASON

Driving with summer tires during the winter season is risky. When the temperature drops to or below 45 degrees F for an extended period of time they lose their elasticity compromising their performance in rain, snow and ice.

### Five reasons for using summer tires in the summer season



Driving with a winter tire in spring and summer conditions puts yourself and others in a potentially dangerous position because of compromised safety capabilities, while also decreasing comfort.



Fuel consumption is higher in the summer with winter tires. The pattern structure of summer tires is tailored to the conditions mostly experienced in the warm part of the year on dry and wet roads. Summer tires have optimized handling, braking and comfort under these conditions.




The tread blocks on summer tires are larger and the tread has more longitudinal grooves. The rubber compound is blended specifically for summer temperatures to provide the best possible grip.



Summer tires offer optimum grip and stability even in high temperatures and at high speeds depending upon where you live. Your safety should merit buying two sets of tires, one set being designated for winter use only. While the winter tires are in service, the life of your summer tires is prolonged when properly stored. Recommended safe minimum tread depth for summer tires is 2/32\"/>



Summer tires stop sooner on dry and wet roads compared to winter tires.

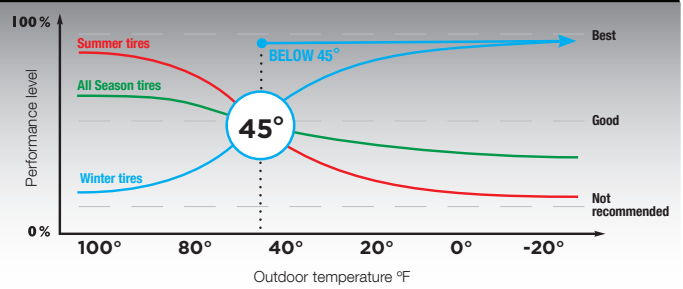


Grip in different outdoor temperatures

### Four reasons for using winter tires in the winter season



Pirelli winter tires are optimized for wet road conditions and cold weather allowing safe unrestricted winter season use of your vehicle.



When the temperatures are consistently below 45 degrees F, the more efficient grip of winter tires guarantees shorter braking distances and considerably better performance.




Pirelli winter tires guarantee greater mobility in snow, and do so without sacrificing comfort or performance on dry road surfaces.



To maintain optimal performance efficiency and safety it is highly recommended to keep winter tire tread depth greater than 5/32\"/>

### Comparison of braking distance in summer conditions


ABS braking on a dry road surface (62-0 mph) at 77 F

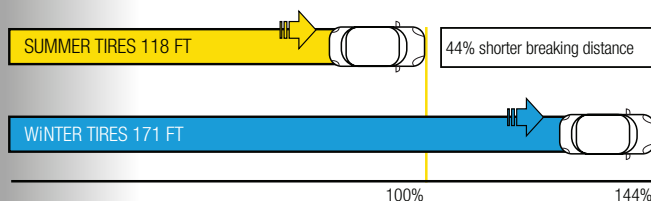

Source: ADAC test

### Braking with ABS: Comparison of summer and winter tires

The most important argument in favor of winter tires is their greater safety and these advantages are clearly visible in comparative tests with summer tires. Winter tires provide a much shorter braking distance on wet or snow-covered road surfaces at temperatures below 45 F.

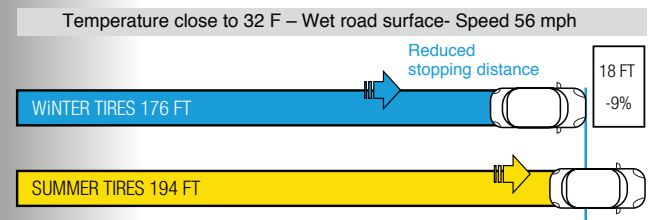

Source: BRV (Bundersverband Reifenhandel und Vulkaniseur-Handwerk e.V.)

# PIRELLI® ORIGINAL EQUIPMENT & REPLACEMENT LIMITED WARRANTY PASSENGER & LIGHT TRUCK TIRES

## What Is Warranted and Who Is Eligible Under the Warranty?

Pirelli Tire LLC (Pirelli Tire North America ("PTNA")), 100 Pirelli Drive, PO Box 700, Rome, GA 30161-7000, warrants to the original purchaser that all Pirelli brand or PTNA private brand Original Equipment and Replacement Passenger and Light Truck radial tires with a complete D.O.T. identification number and branded Pirelli or a PTNA private brand, which are supplied by PTNA, either directly or through an authorized Pirelli Dealer, and which are mounted on passenger cars, vans and light trucks within the U.S.A. and Canada will be free from defects in workmanship and materials. The Pirelli Original Equipment & Replacement Limited Warranty is subject to periodic revision: see the Warranty section at [www.us.pirelli.com](http://www.us.pirelli.com) for the latest version.

## Original Equipment and Replacement Tires

Original Equipment Tires are defined as tires supplied as original equipment by the vehicle manufacturer on new vehicles. Original Equipment tires are backed by Workmanship and Materials coverage. The PTNA Limited Treadwear warranty does not apply to Original Equipment tires.

Replacement Tires are defined as tires mounted to your vehicle after the Original Equipment tires have been removed. Replacement Tires are backed by both Workmanship and Materials and PTNA Limited Treadwear coverage as defined in this document.

## Tire Registration

Please request your dealer register your replacement tires, provide you with a registration card, or go to [www.us.pirelli.com](http://www.us.pirelli.com) to register your tires on line. In case of a tire recall, we can reach you only if we have your name and address. You must register your tires to be on our list.

## What Is the Adjustment Policy and For How Long?

If a Pirelli tire becomes unserviceable due to workmanship or material anomalies during the initial warranty period, which is one year from the date of original retail purchase of the vehicle or purchase of replacement tires (purchase receipt required) or within the first 2/32" of the original usable tread, whichever occurs first, the tire will be replaced with the same or comparable tire at no charge to the owner. To receive consideration for warranty coverage, tires must be returned to a PTNA authorized dealer. Tire Inspection Personnel designated by PTNA make the final determination regarding qualification for Workmanship and Materials and Limited Treadwear coverage on tires submitted to Pirelli via an authorized Pirelli dealer. If the tire is presented for ride related anomalies the warranty period is one year from the date of original retail purchase of the vehicle or purchase of replacement tires (purchase receipt required) or within the first 2/32" of the original usable tread, whichever occurs first. The owner must pay for any associated service charges, including costs associated with mounting and balancing in both the aforementioned cases.

After the initial warranty period, if a Pirelli tire becomes unserviceable due to workmanship or material anomalies the owner must pay the cost for a comparable new Pirelli brand or PTNA private brand replacement tire on a pro-rata basis. The authorized Pirelli Dealer will determine the cost by multiplying the percentage of the original usable tread worn by the current dealer selling price. The owner must pay for any associated service charges, including costs associated with mounting and balancing of the tire.

A tire has delivered its original usable tread life and is considered 100% worn when the treadwear indicators (2/32" tread remaining) become visible regardless of age or mileage.

## Pirelli Confidence Plus Program™

Select Pirelli tires are covered by a 30 day trial period. At any time during the 30 day period if you are not satisfied with any of the qualifying lines listed below, the set of four tires with the original sales receipt may be returned to the authorized Pirelli dealer from which they were purchased and may be exchanged for a set of Pirelli tires for equal or lesser value.

Tire lines which qualify for Pirelli Confidence Plus Program:

- Cinturato™ P1™ Plus
- Cinturato P7™ All Season Plus
- P4™ Four Seasons Plus
- P Zero™ All Season Plus
- Scorpion Verde™ All Season Plus

Refer to [www.us.pirelli.com](http://www.us.pirelli.com) for details regarding terms and conditions of the Pirelli Confidence Plus Program.

## Limited Treadwear Warranty for Replacement Tires Only

In addition to the above workmanship and materials warranty PTNA also warrants to the original consumer purchaser only, that the tread life of Cinturato P3000™, Cinturato P1 Plus, P4 Four Seasons, P4 Four Seasons Plus, Cinturato P5™, P6™ Four Seasons Plus, Cinturato P7 All Season Plus, Pirelli P Zero All Season Plus, P Zero Nero™ All Season, Scorpion ATR, Scorpion STR and Scorpion Verde All Season Plus replacement street legal tires which are supplied by PTNA either directly or through an authorized Pirelli dealer, will have treadwear warranty coverage for the described vehicle odometer miles from the point of original retail purchase. The authorized Pirelli Dealer will determine the replacement tire cost by multiplying the percentage of the mileage obtained by the current dealer selling price.

## The PTNA Treadwear Mileage Warranty Conditions:

- You are the original purchaser of the tires and have a copy of the original invoice showing the application mileage.
- You are the owner of the vehicle on which the tires were originally installed.
- The tires are Replacement tires (The PTNA Treadwear Mileage Warranty does not apply to Original Equipment tires).
- You have had the tires rotated every 5,000 to 7,000 miles.
- The tires are worn evenly across the tread, down to the treadwear indicator (2/32") at which time they are considered to be 100% worn out. There cannot be more than a 2/32" tread depth difference across the tire.
- Your servicing Pirelli Dealer has completed the Tire Rotation Record.
- PTNA Mileage Warranty does not apply to Original Equipment fitments.
- Passenger and P-Metric Light Truck tires are not covered for mileage when used on commercial vehicles or in commercial applications.
- Mileage warranty does not apply to Euro-metric tires purchased before July 1, 2011.
- For vehicles equipped with staggered size fitments (different tire sizes front and rear), the mileage warranty for the rear tires will be 50% of the stated mileage warranty for that line.
- Run Flat tires will have a mileage warranty of 50% of the stated mileage warranty for that line, not to exceed 30,000 miles, whichever is lower.

Tire Line	Mileage
Cinturato P3000	85,000
Cinturato P1 Plus	35,000
P4 Four Seasons T	85,000
P4 Four Seasons H	65,000
P4 Four Seasons Plus T	90,000
P4 Four Seasons Plus H	70,000
P4 Four Seasons Plus V	65,000
Cinturato P5 T	85,000
Cinturato P5 H	65,000
P6 Four Seasons Plus	45,000
Cinturato P7 All Season Plus	70,000
P Zero Nero All Season	45,000
P Zero All Season Plus	50,000
Scorpion ATR	50,000
Scorpion STR	65,000
Scorpion Verde All Season Plus	65,000
Scorpion Verde All Season (see below)	

## Scorpion Verde All Season Mileage Warranty

- All Scorpion Verde All Season tires produced in the year 2013 will be eligible for 50,000 mile limited treadwear warranty for H and V rated, and 60,000 mile limited treadwear for T rated.
- All Scorpion Verde All Season tires produced after the year 2013 are not eligible for mileage warranty coverage.

## Road Hazard Policy for Run Flat Tires Only

Pirelli Run Flat tires are manufactured with technology that allows limited low-inflation operation in the event of sudden loss of pressure. Pirelli does not recommend the repair of run flat tires and as a result, Pirelli provides road hazard coverage on all Pirelli produced tires that are manufactured with run flat technology. To qualify for Run Flat Road Hazard coverage, a completed claim form along with the tire exhibiting the road hazard must be returned to Pirelli through an authorized Pirelli dealer.

If a Run Flat tire becomes unserviceable due to workmanship or materials anomalies or road hazard injury during the initial warranty period, which is one year from the date of original retail purchase of the vehicle or purchase of replacement tires (purchase receipt required) or within the first 2/32" of the original usable tread, whichever occurs first, the tire will be replaced with the same or comparable tire at no charge for the tire to the owner. After the initial warranty period, if a Run Flat tire becomes unserviceable due to workmanship or materials anomalies or road hazard injury, the owner must pay the cost of a comparable new Pirelli brand or PTNA private brand replacement tire on a pro-rata basis. The authorized Pirelli dealer will determine the cost by multiplying the percentage of the original usable tread worn by the current dealer selling price. The owner must pay for any associated service charges, including costs associated with mounting and balancing of the tire. This Road Hazard Policy is not a warranty. PTNA does not warranty that a Pirelli tire will not fail due to road hazard and does not authorize any person, including authorized Pirelli dealers, to make such a warranty.

## Pirelli "Seal Inside" Technology

Select Pirelli tires incorporate "Seal Inside" technology, a construction designed to stop the loss of air from a tire when punctured by an object. Providing the puncture does not compromise the structural integrity of the tire, a sealing material layer prevents possible air leakage in the event of a carcass puncture. The "Seal Inside" technology is not designed or intended to be a permanent repair, and is only meant to allow the consumer to go to a Pirelli dealer for an inspection to determine if repair or replacement is needed. Visit [www.us.pirelli.com](http://www.us.pirelli.com) for more information.

# TIRE CARE AND SERVICE

## What Is Not Covered By The Warranty?

- Tires on any vehicle registered and normally operated outside the United States of America or Canada.
- Tires transferred from the vehicle on which they were originally installed.
- Tires misapplied due to insufficient Speed Rating, Load Index, undersized or oversized tires.
- Tires damaged from improper mounting/dismounting practices, abuse, misuse, or neglect.
- Tire dealer/retailer services: mounting, dismounting, balancing, studding, tire rotation, or wheel alignment.
- Mileage warranty on tires fitted as Original Equipment (Pirelli brand tires supplied as original equipment on new vehicles)
- Passenger tires (Euro-metric/P-metric) used on commercial vehicles or used in commercial applications.
- Tires in which anything other than air or nitrogen has been used as the support medium.
- Tires injected with liquid balancer or sealant or any other balancing material.
- Tires which have been modified by the addition or removal of material or any tire intentionally altered to change its appearance.
- Tires improperly repaired or with repairs not conforming to Rubber Manufacturers Association standards, or with section repairs, or with a self-vulcanizing plug only or patch only.
- Tires which have been recapped, or retreaded, or regrooved.
- Tires used in racing or other competitive events.
- Tires removed in multiples when only one tire can be claimed, or is suspect of a claim.
- Ride related anomalies after the first 2/32" of treadwear.
- Tires which become unserviceable because of tire operation in excess of tire/wheel manufacturers' specifications and recommendations, including spinning.
- Tires which become unserviceable because of a mechanical irregularity in the vehicle such as misalignment, defective brakes, defective shock absorbers or struts, or improper rims.
- Tires damaged by fire, chemical corrosion, vandalism, wrecks, chains, theft, run while flat, under inflated, over inflated or abused during servicing.
- Tires affected by flat spotting caused by improper transport or storage.
- Tires which became unserviceable because of road hazard injuries (e.g., nails, glass, metal objects) or other penetrations or snags, bruises or impact damage, except for those Run Flat lines/sizes specifically covered by the Pirelli Road Hazard Policy.
- Tires with weather / ozone cracking which were purchased more than four years prior to presentation for adjustment. (If no proof of purchase date is available, the warranty will be four years from the DOT date).
- Summer tires that developed surface cracks due to use in low ambient temperatures. These include P Zero Silver, P Zero Trofeo, P Zero Corsa System, P Zero, P Zero Rosso™, P Zero Nero, Cinturato P1, Cinturato P1 Plus, Cinturato P7, Scorpion Zero™ and Scorpion Verde.

## How to Make a Claim under This Warranty

The owner, when making a claim under the terms of this warranty, must present the tire along with proof of purchase to any authorized Pirelli Dealer. Once tires are returned to Pirelli by an authorized PTNA dealer and credit has been issued, submitted tires become the property of Pirelli. To locate an authorized Pirelli Dealer in your area, refer to the Dealer Locator at [www.us.pirelli.com](http://www.us.pirelli.com).

THIS IS THE ONLY EXPRESS WARRANTY GIVEN BY PTNA, APPLICABLE TO PIRELLI BRAND OR PTNA PRIVATE BRAND ORIGINAL EQUIPMENT OR REPLACEMENT PASSENGER CAR RADIAL AND LIGHT TRUCK RADIAL TIRES. PTNA DOES NOT MAKE ANY OTHER EXPRESS WARRANTY OR ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. PTNA DOES NOT AUTHORIZE ANY OTHER PERSON, INCLUDING AUTHORIZED PIRELLI DEALERS OR CAR MANUFACTURERS, OR CAR DEALERS, TO CHANGE THIS WARRANTY OR CREATE ANY OTHER OBLIGATION IN CONNECTION WITH PIRELLI TIRES. PTNA WILL NOT DO ANYTHING OTHER THAN WHAT IS STATED IN THIS WARRANTY IF AN ANOMALY IS FOUND TO EXIST IN A PIRELLI BRAND OR PTNA PRIVATE BRAND ORIGINAL EQUIPMENT OR REPLACEMENT PASSENGER CAR OR LIGHT TRUCK RADIAL TIRE. ALL OTHER REMEDIES ARE EXCLUDED, INCLUDING ANY OBLIGATION OR LIABILITY ON THE PART OF PTNA FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES (SUCH AS A LOSS OF USE OF VEHICLE, LOSS OF TIME OR INCONVENIENCE) ARISING OUT OF AN ANOMALY.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

If further assistance or information is needed, please contact:  
 Pirelli Tire North America  
 Consumer Affairs Group  
 Monday through Friday  
 8:00 AM to 6:00 PM Eastern Standard Time  
 1-800-747-3554 (option #2) (1-800-PIRELLI)

## 1. Tire Sidewall Markings



### Tire Size:

A combination of alphabetic and numeric characters that indicate the nominal dimensions of a tire:



### Load Index:

A numerical code indicating the maximum load carrying capacity of a tire at the maximum cold inflation pressure.

LOAD INDEX	MAX Kg.	LOAD PER TIRE Lbs.	LOAD INDEX	MAX Kg.	LOAD PER TIRE Lbs.
80	450	992	106	950	2094
81	462	1018	107	975	2149
82	475	1047	108	1000	2205
83	487	1074	109	1030	2271
84	500	1102	110	1060	2337
85	515	1135	111	1090	2403
86	530	1168	112	1120	2469
87	545	1201	113	1150	2535
88	560	1234	114	1180	2601
89	580	1278	115	1215	2679
90	600	1323	116	1250	2756
91	615	1356	117	1285	2833
92	630	1389	118	1320	2910
93	650	1433	119	1360	2998
94	670	1477	120	1400	3087
95	690	1521	121	1450	3197
96	710	1565	122	1500	3307
97	730	1609	123	1550	3417
98	750	1653	124	1600	3528
99	775	1708	125	1650	3638
100	808	1764	126	1700	3748
101	825	1819	127	1750	3859
102	850	1874	128	1800	3969
103	875	1919	129	1850	4079
104	900	1984	130	1900	4190
105	925	2039	131	1950	4300

### Speed Symbol:

An alphabetic code indicating the maximum speed at which the tire can carry a load corresponding to its Load Index under specified service conditions.

SPEED SYMBOL	MAXIMUM SPEED	
	KMH	MPH
L	120	74
M	130	80
N	140	86
P	150	93
Q	160	99
R	170	105
S	180	112
T	190	118
U	200	124
H	210	130
V	240	149
W	270	168
*ZR	300	186
(Y)	ABOVE 300	ABOVE 186

\* For tires having a maximum speed capability above 149 mph, a "ZR" may appear in the size designation; above 186 mph, a "ZR" must appear in the size designation, including a "Y" speed symbol in brackets.

# TIRE CARE AND SERVICE

## Other Markings:

P - As part of the tire size designation (e.g., P205/65R15), is used to indicate tires are intended for service on passenger cars.

LT - As part of the tire size designation (e.g. LT235/75R15), is used to indicate the tires are intended for service on light truck vehicles.

M&S - Letters used to indicate a tire suitable for Mud and Snow and/or All Season usage.

XL - As part of the size designation (e.g. P235/75R16 XL), is used to indicate the tire can carry more load as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED).

## 2. Tire Categories:

**ALL SEASON TIRES (ALL WEATHER TIRES):** Tires that are designed to perform in a variety of road conditions in all seasons of the year. An all season tire will carry "M+S", "M&S", or "M/S" designation on the sidewall. All Season tires may carry a Limited Treadwear Warranty depending on line.

**SUMMER TIRES (MAXIMUM PERFORMANCE, HIGH PERFORMANCE, ULTRA HIGH PERFORMANCE):** Summer Performance tires offer superior handling, grip and cornering ability compared to standard tires. They are rated for operation at higher speeds. Maximum Performance, High Performance and Ultra High Performance categories each have different performance characteristics, UTQG ratings and rate of wear depending on line. Some lines may carry a limited treadwear warranty.

**WINTER TIRES (SNOW TIRES):** A winter tire is a tire with a tread design and compound made specifically for snowy and icy conditions and is identified by M&S, M+S or M/S markings on the sidewalls. Tires designed for use in severe snow conditions are further identified with a pictograph of a mountain with a snowflake on the sidewalls and must meet specific snow performance test requirements. Pirelli Winter tires do not carry a mileage warranty.

The information provided above is an overview of tire types. Tread patterns and rubber compounds vary among the seasonal tire types and provide varying performance characteristics and limitations based on your individual needs and vehicle specifications. Summer performance tires are different than winter and all season types. To determine which Pirelli lines carry a Limited Treadwear Warranty, please refer to The PTNA Treadwear Mileage Warranty Conditions and Mileage Warranty sections found in this document.

## 3. Pressure Recommendations

Recommended tire inflation pressures for your vehicle can be found either on your vehicle's tire placard or in your vehicle owner's manual. Correct pressures are related to load, speed and vehicle handling and are vital for even braking, maximum traction and good tire life. Under no circumstances should your tire's cold inflation pressure be less than that indicated on your vehicle's tire placard or in your vehicle owner's manual or higher than the maximum cold inflation pressure molded on to the tire's sidewall.

Under inflation causes excessive flexing, deterioration of the tire and rapid wear of the tread edges. Over inflation results in an uncomfortable ride, a reduced area of tire contact with the road surface (i.e., smaller tire footprint), higher susceptibility to impact damage and rapid wear on the tread center.

**WARNING: Driving on tires with improper inflation pressure is dangerous. These situations can cause a tire failure, including tread/ belt separation, even at a later date, which could lead to an accident and serious personal injury or death.**

Inflation pressure must be checked at least once a month and should be checked only when the tire is cold or before it has been driven. Driving even a short distance (1 mile or 2 to 3 minutes) causes tires to heat up and the air pressure to increase approximately 4 PSI. In case it is necessary to adjust the air pressure in tires that have been driven, the air pressure should be increased to a gauge reading of 4 PSI higher than the recommended cold inflation pressure.

For Example Only:	
Gauge Reading of Hot Tire:	27 PSI
Recommended Cold Inflation Pressure:	26 PSI
Desired Gauge Reading of Hot Tire:	26 PSI + 4 PSI = 30 PSI
Therefore:	Add 3 PSI

Check the cold inflation pressure on the tires, at least by the next day. Never reduce or "bleed" pressure from hot tires since your tires will then be underinflated when they cool down. Always use a reliable pressure gauge.

## 4. UHP Summer Tires

Rubber compounds formulated for ultra high performance summer tires can lose flexibility and may develop random surface cracks at cold temperatures. Therefore extra care should be used in handling tires in this condition. These compounds are optimized for maximum dry and wet performance in warm conditions. Special tread compounds in these tires will have decreased performance, such as lateral and braking traction, at temperatures below 45° F or when driving on snow or ice. Therefore, it is recommended to install winter tires in these conditions.

## 5. DOT Street Legal Competition Tires

P Zero Trofeo and P Zero Corsa tire lines use special tire construction and compounds to achieve their distinctive performance in dry conditions. As a result of that, their performance in cold temperatures, heavy rain or standing water will be decreased. Use extreme caution and drive slowly on wet roads.

The minimum tread depth will be reached earlier than normal road tires, resulting in reduced tread life.

## 6. Winter Tires

The standard Pirelli tires may be effective in light snow conditions. However, for winter use, you may wish to install winter tires. During winter use, Pirelli strongly recommends the fitment of 4 winter tires. Please check your vehicle owner's manual concerning winter tire size recommendation. If the winter tires have a lower speed rating than the original equipment tires, vehicle handling may be affected, and the vehicle maximum speed must be reduced to the winter tire speed rating.

Pirelli requires that studded tires be installed on all four positions. Installing studded tires only on the drive positions of any vehicle, including a front wheel drive vehicle, may cause adverse handling characteristics.

## 7. Run Flat Tires

Always refer to the vehicle owners' manual with respect to specific safety and operating information relating to the vehicle. Damaged Run Flat tires or Run Flat tires that have experienced a loss of pressure should immediately be replaced with another Run Flat tire of identical size and Service Description (Load Index and Speed Symbol).

Run Flat tires have been developed based on the specifications of the vehicles on which they are mounted. Accordingly, Run Flat tires should only be mounted on vehicles specifically manufactured to accommodate Run Flat tires.

Run Flat tires must be mounted in conjunction with a functional Tire Pressure Monitoring System (TPMS).

The mounting of tires and installation of the Tire Pressure Monitoring System (TPMS) should be carried out by a specialized dealer.

## 8. Tire Replacement

The tires fitted to your vehicle as original equipment were tested and approved by the vehicle manufacturer and the tire manufacturer and take into account all aspects of the vehicle's operation. Changes in the tire size, type or construction should not be made without seeking advice from the vehicle or tire manufacturer or an authorized Pirelli dealer since unapproved tires on your vehicle could adversely affect steering, handling, braking and traction. The tire information (tire size, load index and speed symbol) as found on the vehicle placard or in the owner's manual should always be followed when replacing tires.

It is strongly recommended that Pirelli tires be mounted in sets of four with the same tread type. Pirelli tires should not be mixed with other tire brands. It is necessary to follow this procedure because different tire constructions have different handling characteristics. Tires on the same axle must be the same manufacturer, brand, tire size, load index, speed rating and Pirelli part number.

When changing only two tires on a vehicle which is homogeneously fitted (four tires of the same tire size), fit the new tires on the rear axle. This applies to all vehicles regardless of their drive axle. (Front or Rear Drive).

On all wheel drive or four wheel drive vehicles the tires must always be replaced in sets of four.

When replacing tires on light truck vehicles, you should always follow the vehicle manufacturer's recommendations. Passenger and light truck tires are not interchangeable, due to differences in their pressures and load carrying capacity.

P-Metric and Euro-metric Interchangeability: Euro-metric (Example: 225/45R17) tires have a load index which is equal to or greater than that of the same size P-metric (Example: P225/45R17) tire. Therefore, they have the same or higher load carrying capacity at the maximum rated inflation pressure. Always check with your tire dealer or Pirelli Tire Consumer Affairs to be sure of the exact interchangeability to maintain proper vehicle dynamics.

Please be aware that it is important that, before fitting the suggested tires, the fitment is allowed by the technical specifications of the vehicle, the vehicle manufacturer and the relevant homologations. Pirelli Tire does not express any view as to the compatibility of the wheel/tire combination with the technical specifications for the chassis and vehicle.

**TO MAINTAIN PROPER VEHICLE DYNAMICS AND LOAD CARRYING CAPACITY, REPLACEMENT TIRES MUST ALWAYS HAVE A LOAD INDEX AND SPEED SYMBOL EQUAL TO OR GREATER THAN THOSE FITTED AS ORIGINAL EQUIPMENT.**

When making plus size fitments, you should consult with the dealer regarding any suspension or braking system modifications which may be recommended for the vehicle.



## PERFORMANCE YOU CAN TRUST

- Limited Treadwear Warranty\*
- 30 Day Trial\*\*

Visit [www.US.Pirelli.com](http://www.US.Pirelli.com) for more information

### ORDERS / INQUIRIES

Tel 1.800.pirelli (1.800.747.3554) • Fax 1.706.368.5888

### ONLINE ORDERS

[www.tireclub.pirelli.com](http://www.tireclub.pirelli.com)

To obtain a new user sign on, password and startup guide, send an e-mail request to [contactcentertyres.us@pirelli.com](mailto:contactcentertyres.us@pirelli.com)

### ONLINE TRAINING AND CERTIFICATION

[www.pirellitirecampus.com](http://www.pirellitirecampus.com)

### Pirelli Tire North America

100 Pirelli Drive, Rome, Georgia 30161-7000

Pirelli is a registered trademark of Pirelli SpA.  
©2015 Pirelli Tire North America. All rights reserved.  
Document No. F90-031-7.2.3 Rev. S  
PPRS0005 Rev. 1/15

\* For complete warranty details, visit an authorized Pirelli Dealer or [www.US.Pirelli.com](http://www.US.Pirelli.com)  
\*\*Valid ONLY to exchange the original qualifying set of tires for a new set of Pirelli tires, within 30 days of purchase, at the place of purchase with an original receipt.